



# ARCY-Line: 4" & 6" Architectural Cylinder Up and/or Down Light

3-CCT + 3-Power Selectable w/ Photocell



| WATT | LUMENS |
|------|--------|
| 12   | 1,260  |
| 16   | 1,680  |
| 20   | 2,100  |
| 22   | 2,040  |
| 29   | 2,720  |
| 35   | 3,400  |

### Detail Specification:

- Finish: Bronze, Black, White
- IP Rating: Wet Location IP65
- Beam Angle: 40° standard (other optics available)
- CCT: 30/40/50K Selectable
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 122° F
- Lens: Clear glass with optics
- Average life (L70) of 50,000 hours

### Applications:

- Dock and Loading
- Walkways & Pathways
- Parking Lots
- Hospitality, Multi-Family
- Outdoor Corridors
- General Outdoor Lighting
- Residential, Commercial and Industrial

### Product Information:

- Sturdy die-cast aluminum housing finished with corrosion free powder coat
- Photocell included on each fixture. Features on/off switch.
- 1.5" STJW 18.3 AWG cable whip included
- 3-Selectable Light Options: Up Only, Down only, Up & Down Light
- Select-n-Switch Technology: 3-CCT Selectable + 3-Power Selectable
- Easy Beam Angle Swap: available for field swap or at factory level
- Instant-On to full brightness

### Driver Options:

- UNV: 120-277V 0-10V Dimmable
- Built in 6Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

### Mounting & Installation:

- Mounts to 3 or 4" J-box
- Covers a standard 4" recessed j-box

### Certifications:

- UL Listed for USA and CA
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

| Series                                       | Finish              | Photocell   | Beam Angle            |
|--|---------------------|---|-----------------------|
| <b>LED-CYA-UD-4-3P20-TRI</b><br>4" 20/16/12W | <b>BZ</b><br>Bronze | <b>PC</b><br>Photocell is included with on/off switch | <b>(blank)</b><br>40° |
| <b>LED-CYA-UD-6-3P35-TRI</b><br>6" 35/29/22W | <b>WH</b><br>White  |   | <b>15D</b><br>15°     |
|  | <b>BL</b><br>Black  |   | <b>60D</b><br>60°     |

Specs and model numbers are subject to change with or without notice.


**FEATURES**




Die-Cast Aluminum

Corrosion Free Powder Coat

Clear Lens with Optics

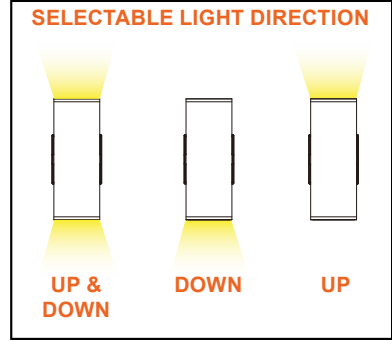

Light Direction



3-Power Selectable



Selectable Photocell




3-CCT Selectable



**DIMENSIONS**

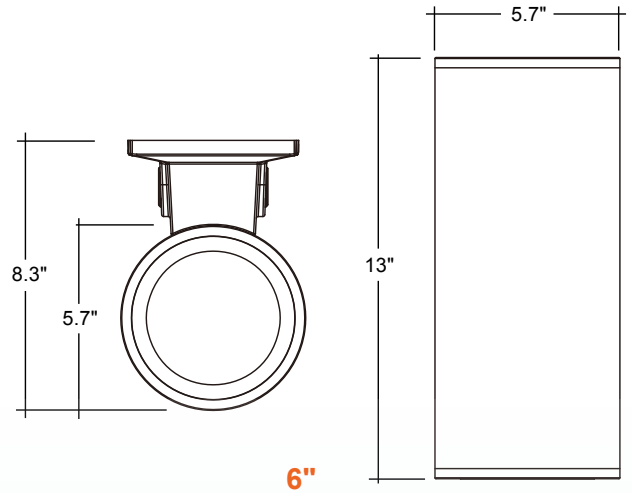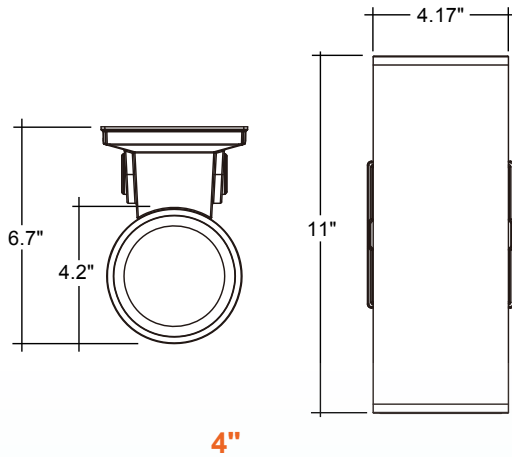

**ACCESSORIES**



**BEAM**

| Accessory Model   | Description                               |
|-------------------|---|
| CYA-UD-4-OPTIC-15 | Cylinder: ARCY-Line Optic (Field Install) |
| CYA-UD-6-OPTIC-15 | Cylinder: ARCY-Line Optic (Field Install) |
| CYA-UD-4-OPTIC-60 | Cylinder: ARCY-Line Optic (Field Install) |
| CYA-UD-6-OPTIC-60 | Cylinder: ARCY-Line Optic (Field Install) |