

Slim-Line: LED Slim Panel Tilt Downlights

5-CCT Selectable



Detail Specifications:

- Finish: White
- Wet Location Rated
- Beam Angle: 110°
- Chip: SMD 2835, R9 >50, CRI >90
- 3 Step MacAdam Ellipses
- Operating Temperature: -40° - 114° F
- Lens: Frosted acrylic, non-yellowing
- Average life (L70) of 50,000 hours

Applications:

- General Recessed Lighting
- Residential & Multifamily
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality

Product Information:

- 5-CCT Selectable: 27/30/35/40/50K
- Edge-lit technology: reduces glare with even light distribution
- Perfect for shallow ceilings. Only 1.5" space required.
- Fully upgraded airtight design
- Metal housing and trim for better heat dissipation
- Standard white round trim
- Optional emergency backup available: delivers full lumens in EM mode up to 25W
- SnapTrim Canless: Spring clips with remote j-box eliminates can

Driver Options:

- 120V Triac Dimmable
- Built in 2.5Kv Surge Protector
- Flicker Free

Mounting & Installation:

- Cut Out Dimensions
 - 4.25"
 - 6.25"
- Optional new construction plate available
- This fixture does not fit into a recessed can
- No can needed in remodel applications, tension clips mount into 1/2" to 1.5" thick ceiling
- Can be removed from below the ceiling for service or replacement
- Pre-wired junction box with circuit wiring built in (3 in/ 3 out)

Certifications:

- ETL Listed for USA and CA
- CA Title 24 JA8-2022 CEC Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017
- IC Rated and ASTM-E283 Air-Tight

Series

LED-SL-TLAT-4R-10W-5CCT-WH
4" • 820Lm
LED-SL-TLAT-4R-10W-5CCT-BL
4" • 820Lm
LED-SL-TLAT-6R-13W-5CCT-WH
6" • 1100Lm
LED-SL-TLAT-6R-13W-5CCT-BL
6" • 1100Lm

Emergency

(Blank)
No
Emergency
Backup
EMB
Emergency
Backup

Optional Accessories (Order Separately)


New Construction Plates	Extension Cables	Emergency Backup 1 (field install)	Goof Ring
CUNV-NC-ICAT-7H Universal Plate with Hanging Bars	EXT-10FT 10' Extension EXT-20FT 20' Extension	LED-EMB-16W-HV-0/10V Up to 16W fixtures LED-EMB-32W-HV-0/10V Up to 32W fixtures	GR-4-WH 4-8" Width GR-6-WH 6.3-10" Width
C4-JBX-RI 4" Rough in plate C6-JBX-RI 6" Rough in plate CUNV-JBX-RI-XL Universal Rough In Plate Extra Long			
1. Field installable. Lasts 90 minutes			

Specs and model numbers are subject to change with or without notice.


FEATURES




DIMENSIONS

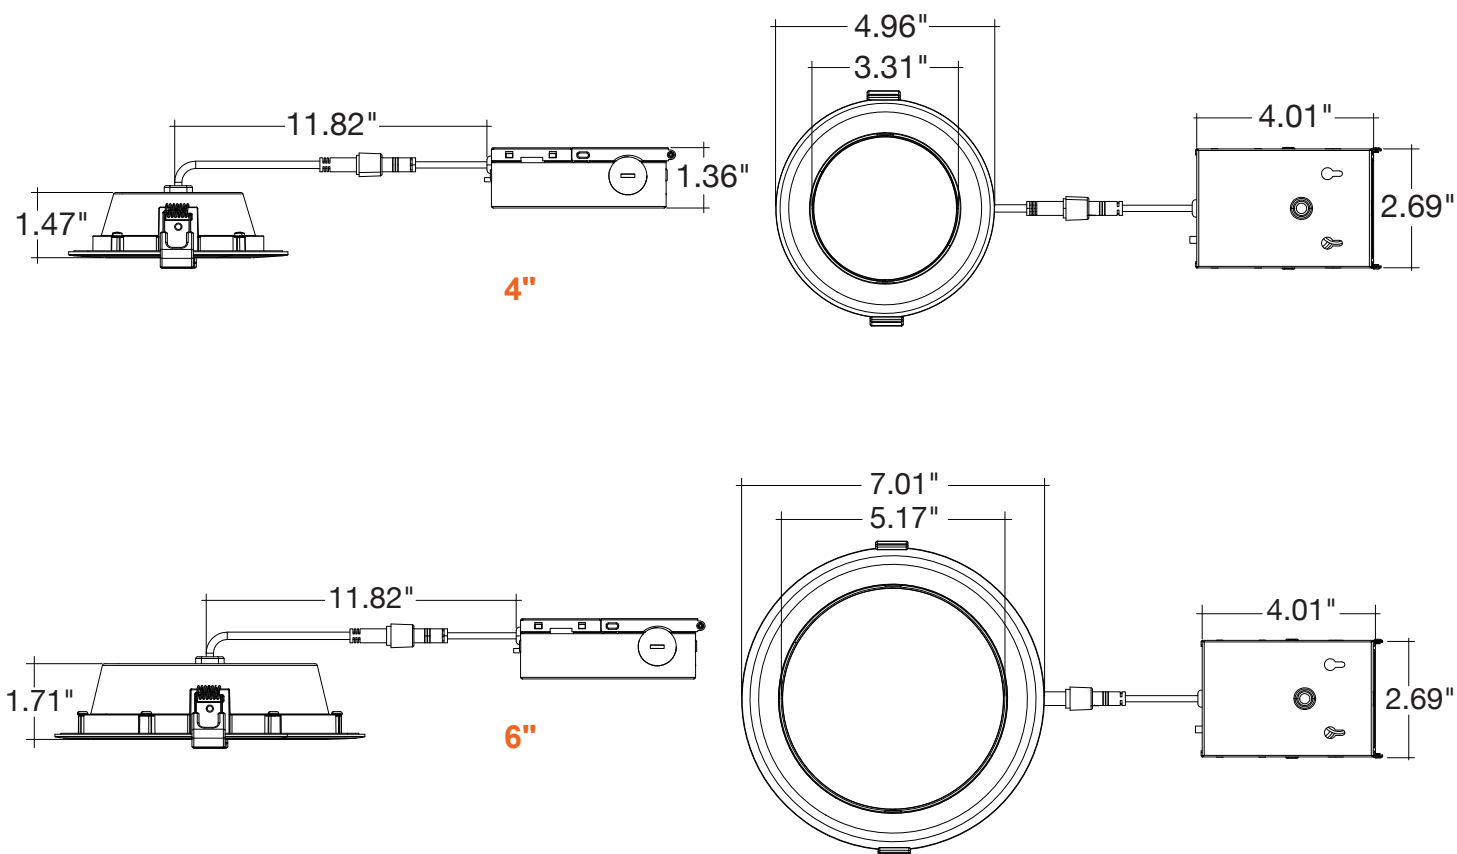


ACCESSORIES

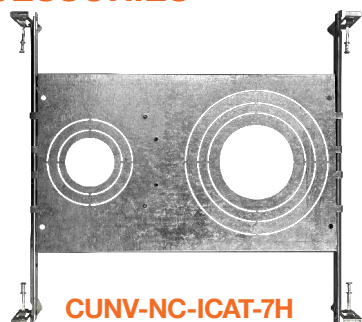


CUNV-NC-ICAT-7H



C4-JBX-RI

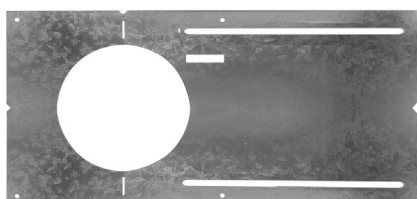

C6-JBX-RI

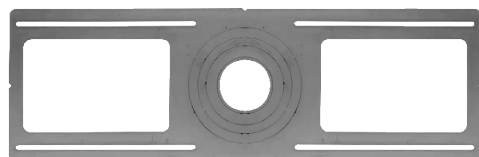


CUNV-JBX-RI-XL



EXT-10'
EXT-20'



LED-EMB-16W-HV-0/10V
LED-EMB-32W-HV-0/10V



GR-4-WH
GR-6-WH

Model	Voltage	Watts	Lumens	Color	CRI
LED-SL-TLAT-4R-10W-5CCT-WH	120V	10w	820	27/30/35/40/50K	>90
LED-SL-TLAT-4R-10W-5CCT-BL	120V	10w	820	27/30/35/40/50K	>90
LED-SL-TLAT-6R-13W-5CCT-WH	120V	13w	1100	27/30/35/40/50K	>90
LED-SL-TLAT-6R-13W-5CCT-BL	120V	13w	1100	27/30/35/40/50K	>90

CONSTRUCTION PLATES

Accessory	Description
CUNV-NC-ICAT-7H	1" 2"3" 3.5" 4" 5" 6" Universal Pre-Mounting New Construction Plate
C4-JBX-RI	4" Rough In Plate
C6-JBX-RI	6" Rough In Plate
CUNV-JBX-RI-XL	Universal tough in plate (Extra Long)

EXTENSION CABLE

Accessory	Description
EXT-10FT	10' Extension Cable
EXT-20FT	20' Extension Cable

EMERGENCY BACKUP

Accessory	Description
LED-EMB-16W-HV-0/10V	Up to 14W fixtures
LED-EMB-32W-HV-0/10V	Up to 24W fixtures

GOOF RING

Accessory Model	Description
GR-4-WH	4" Goof ring, inner dim: 4" outer dim: 8"
GR-6-WH	6" Goof ring, inner dim: 6.3" outer dim: 10.5"

TESTED COMPATIBLE DIMMERS

Other dimmers may be compatible but have not been tested. Please contact us for more information.

TRIAC/ELV Dimmers

Lutron	Leviton	Legrand	Cooper
AYCL-153P	6633	ADTP703TU	9540
DV-600PR	6674	H703PTW	DAL06P
DVCL-153P	6602		
MACL-153MH	IPL06		
MRF2-6CL			
D-600P			
NTELV-300P			
S-600P			
CT-600P			
CTCL-153P			
TG-600P			
TCCL-153P			
L-153P			