



2026 Catalog V1

**Indoor
Outdoor
Controls
Lamps
Landscape
Emergency**

Warehouse Locations

- Bell, CA (HQ)
- Dallas, TX
- S. Windsor, CT
- Long Lake, MN
- Midland, NC
- Freehold, NJ
- Cincinnati, OH

History

Established in 2010, EnVision LED Lighting, Inc is a Los Angeles based LED lighting leader that provides an endless amount of lighting solutions. Our highly efficient and low energy-consuming lighting products have been engineered strategically to best suit multiple different industries: residential, multifamily, hospitality, commercial, industrial, and more. As a family owned and operated business, ownership is actively engaged daily. The EnVision LED Family team is one of the best. We continue to grow our team of seasoned professionals to best service you.

Quality

At EnVision LED, we never sacrifice the quality of components we use to maintain aggressive market pricing. What does this mean? The higher quality components we use will ensure our products last and live up to the expected life hours and warranty. We back it up with our warranty policy and have a team of engineers to help resolve any issues that may arise.

Price Friendly

Quality products at a competitive level are what we believe to be best practices to support your growth as our customer. Although we have faced an immense amount of pressure with the national supply chain issues, we have kept our prices relatively low compared to the product increases we have incurred.

Envision LED Certifications



Safety Certification Listings

All EnvisionLED products carry either a UL or ETL nationally recognized safety certification listing to ensure the highest level of safety.



Energy Efficient Certifications

DLC or Energy Star qualifications are shown in each product specification table.



JA8 Title 24 Compliance

Look for the JA8 icon for products that have been qualified and listed in California's JA8 MAEDBS database provided to help comply with California Title 24 requirements.

Envision LED Product Features



CCT Selectable

A specification for white light sources used to describe the dominant color tone along the dimension from warm (yellows and reds) to cool (blue).



Select-N-Switch Technology

EnVisions technology which allows you to choose your desired power/lumens, CCT, Beams, & photocell. Just Select-N-Switch!

Envision LED Controls



Twist-C Control

EnVision's new Twist-C technology allows for an easy sensor installation without any wiring necessary! Purchase any Twist-C control ready fixture and simply twist the sensor into the fixture to activate. Choose from our basic, ENVISIONLS, or SILVAIR sensors.



Envision Connect App

Download our new smart home app on your favorite Android or Apple devices to connect our Bluetooth/Wifi enabled fixtures!



Envision
CONNECT

NEW	Wall Packs	11-17
	Steel Poles	18-19
NEW	Area Lights	20-26
	Cylinders	26
	Security	27
	Wall Sconces	28
	Tenon Mounts for Poles	29
	Area Lights	30-32
	Sports Lights	33
	Bollard Lights	34
	Aquarium Lights / Grow Lights	35
	Linear Highbay	36-37
NEW	UFO Highbay	38-40
	Canopy Lights	41-42
NEW	Panels	43-46
	Troffers	47-48
	Tubes	49-51
NEW	ALIN2 G2 Series	52-56
	Linear Fixtures	58-60
	Linear	61-62
NEW	Strips	63-64
	Wraps	65-66
	Vapor Tights	67
	1" Mini Downlights	68
	Trimless Downlights	69
	Canless Downlights	70-78
	EXT Snaptrim Downlight Accessories	79
	Trimless Downlights	80
NEW	Commercial Downlights	81-82
NEW	Canless Downlights	83
	Smart Downlights	84
NEW	Retrofit Downlights	85-88
	LED Cans	89
NEW	Surface Mounts	90-96
	Cylinder Downlights	97
NEW	Surface Downlights	98
	Vanity Lights	99-100
NEW	Track Lights	101
	Puck Lights	102
	Linkable Lights	103-104
	Undercabinet Fixtures	105-106
		
	Landscape Lights	107
	Landscape Path Lights	108-110
	In-Ground Lights	111
	Hardscape	112
	Step Lights	113
	Accessories	114
	Step Lights	115
	Emergency Exit Signs	116-117
	Corn Bulbs	118
	MR16 Series	119
NEW	PL Lamps	120
	Filament Bulbs	121
	LED Bulbs	122-124
	LED Lightstrips	125
	Magnetic & Electronic Transformers	126
NEW	Sensors	127-128
NEW	Emergency Backups	129-130
	Displays	131




Shipping & Logistics

With 5 warehouse locations and over 200,000 sq.ft. of space, we are stocked up and ready to ship. Our strategically located warehouses allows for quicker transit and potential will call options for our distributors.

All of our in-stock orders ship within 24 hours.

Need an order shipped same day?

Contact our customer service department and our team will get it done.

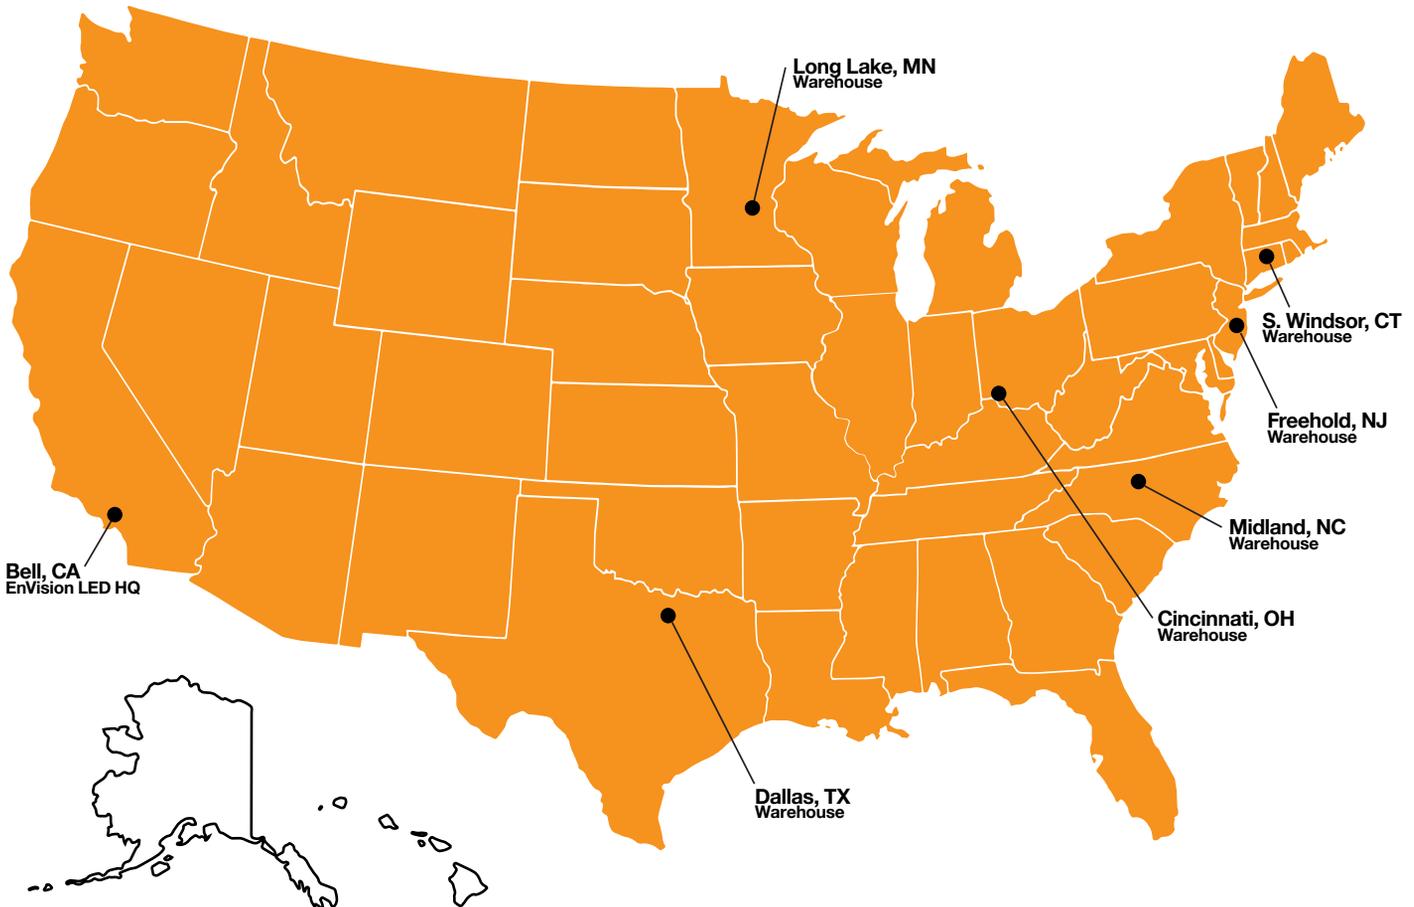



Lighting Layout Designs

Take advantage of our FREE & FAST lighting layout designs for your next project. Not sure which product to use? We would be happy to provide our recommendations.



Easy RGA

Need a replacement? No questions asked! E-mail your request to rga@envisionledlighting.com and we will process it as quick as we process our orders.



Lighting Payback Calculator

Simplify the process of showcasing energy savings, rebates, and return on investment with our intuitive Payback Calculator Tool. Designed for LED conversions, this tool delivers a downloadable, project-specific report featuring: energy savings, utility rebates, ROI, payback periods, and environmental impact all tailored to your project's details. Easily customize reports with multiple rooms, fixture types, and even separate locations within a single project.



Rebate Finder

EnVision's rebate finder makes its easy to find available rebates. Choose your fixture, state and utility to find all our products that qualify for a rebate in your region.



Product Customization

From emergency back up solutions, longer cords, flex whips, photocells, sensors, and custom finishes we are here to help!



FREE Samples!

Get your free sample today: light it up, show it off, and experience our lighting solutions. Send us your sample request today, we can't wait to impress you!



Case Studies

View our growing selection of case studies to see how we helped our customers.



Portal Access

View inventory, check status of your orders, & more. Contact your sales rep and request access today!

Customer Portal

Agent Portal



EnVisionLED™ Control Options


EnVision LED offers 3 control systems compatible with our LED Fixtures for projects of all sizes and budgets.

	Basic Controls	EnVisionLS 	EnVisionLED™ x SILVAIR 
Description	Standard Plug In Sensors	Basic Bluetooth Wireless Control	Advanced Bluetooth Wireless Control
Recommended Quantity (but not limited to)	N/A	>40-50 Nodes	>50 Nodes
Maximum Zone Quantity	N/A	100	3,000
Commissioning Tool	Remote Only	  ENVISIONLS App 	  SILVAIR App 
Commissioning Process	Individually Set via Remote	Wireless Must be done on site	Wireless- Initial linking must be done on site. Commissioning can be done via desktop remotely.
Floor Plan Upload	N/A	N/A	Yes Add a floor plan and mark luminaires & zones via desktop
Gateway	N/A	N/A	Required only for energy monitoring, advanced scheduling, automated demand response.
Individual Luminaire Control	Yes	Yes	Yes
Luminaire Grouping Zoning	N/A	Yes	Yes
High End Power Low End Power	Yes but limited (View Remote)	Yes	Yes
Cost	\$	\$\$	\$\$\$
DLC NLC Listed	N/A	Yes	Yes
Energy Monitoring & Data Reporting	N/A	N/A	Monitor energy usage per individual zone & retrofit cost savings calculation + detailed reporting



Compatible Products

EnVision offers a variety of nodes, sensors, & gateways that are controlled via remote, ENVISIONLS Bluetooth Mesh & SILVAIR Bluetooth Mesh on all of our 0-10V dimmable fixtures.

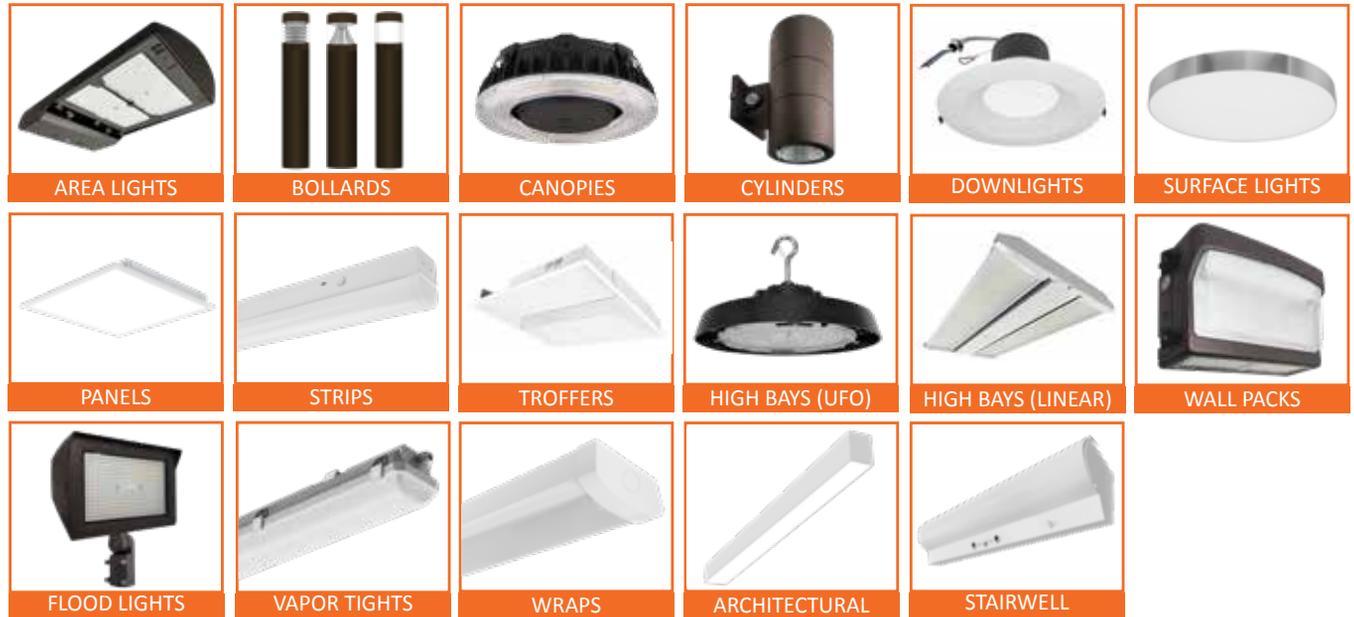

Individual Fixture Controls: PIR Sensor, Bi-Level Dimming, Daylight

Basic Note: **-1** • ENVISIONLS Models Note: **-BT** • SILVAIR Models Note: **-SL**

	MODEL #	DESIGN	RECOMMENDED FIXTURE	FEATURES
	S-TWC-PIR-1 S-TWC-PIR-BT S-TWC-PIR-SL	Twist-C Control Sensor	Sensor Ready Fixtures: Area Lights, Canopies, Flood Lights, High Bays	All models are equipped with PIR occupancy sensing, high & low end bi-level dimming, & daylight sensing.
	S-TWC-90 + S-TWC-PIR-1 S-TWC-90 + S-TWC-PIR-BT S-TWC-90 + S-TWC-PIR-SL	Twist-C Control Sensor + 90 Degree Arm	Cylinders, Strips, Wall Packs	
	S-AUD-PIR-1 S-AUD-PIR-BT S-AUD-PIR-SL	2.5m Audio Jack	Panels & Troffers	
	S-SN-PIR-1 S-SN-PIR-BT S-SN-PIR-SL	Snap In Sensor	Troffers & Wraps	

Group Controls ENVISIONLS Models Note : **-BT** • SILVAIR Models Note: **-SL**

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	S-CM-PIR-LV-BT S-CM-PIR-LV-SL	Ceiling Mounted PIR Sensor	12-24V	PIR Sensor, Bi-Level Dimming, Daylight, 360° detection, 12' Max Mounting Height	Connects to 0-10V dimmable fixtures
	S-WM-PIR-CUNV-BT S-WM-PIR-CUNV-SL	Wall Mounted PIR Occupancy Sensor, Bi-Level Dimming, Daylight	120-277V	On/Off PIR occupancy sensor, 180° detection, 30' detection @ 4' Mounting Height	Connects to LED fixtures
	S-WS-120V-USB-SL		120V	Dimming Wall Socket, Two Sockets	Floor Lamps, Other Lamps

Gateway (Silvaire Only) 4.5–5.5 V DC, 2A Power over Ethernet 36–57 V DC

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	SGW-102	Wall or Ceiling Mounted	POE	Advanced Energy Monitoring Control	Connects to Silvaire Controls. Gateway is not required.

FEATURED PRODUCTS

2200K



FULL CUT OFF WALL PACK: AFC
PAGE 12



FULL CUT OFF WALL PACK: FLAT-FC
PAGE 13



CUT OFF WALL PACK TRAPEZOID
PAGE 14



FULL CUT OFF WALL PACK: FC
PAGE 14



MINI AREA FLOOD LIGHT: M
PAGE 20



AREA LIGHT: OPTIC-LINE BEAM
PAGE 22



RHB3 UFO HIGH BAY: ECOVALUE
PAGE 39



ROUND TRIAC: ECOVALUE
PAGE 78



RDL DOWNLIGHTS: ECOVALUE
PAGE 85




CUSP DISK DOWNLIGHT: ECOVALUE
PAGE 95



CANLESS DOWNLIGHT: SNAP TRIM
PAGE 71, 74



FLOATING ADJUSTABLE SNAP TRIM
PAGE 73

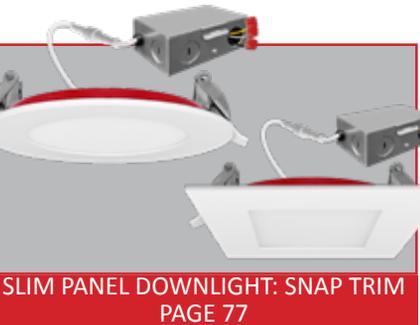

SLIM PANEL DOWNLIGHT: SNAP TRIM
PAGE 77

ENVISION LED is now offering CCT tuning on the following categories via Bluetooth Mesh ENVISIONLS app. Connect each device through our app and control it via our app or wall switch.

COMPATIBLE FIXTURES

WRAPS & LINEARS



PRISMATIC WRAPS



FROSTED WRAPS



WIDE WRAPS



STRIPS



VAPOR TIGHTS



ARCHITECTURAL

TROFFERS & PANELS



GLIDE-LINE




ARCY-LINE



RETROFIT KIT




CENTER BASKET

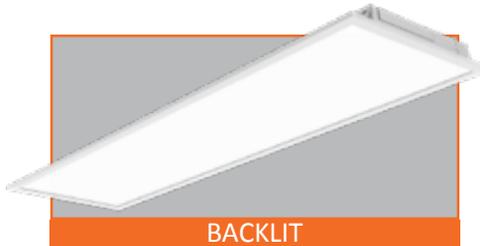

BACKLIT



SLOT

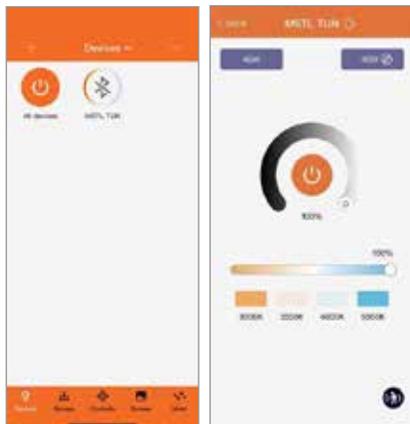

Devices CCT-Select / Dimming



WALL SWITCH
S-WS-DIM-TUN-UNV-BT



Please view our product spec sheets for available add on options. Add on options will differ from standard 5-CCT selectable models.

COMPATIBLE FIXTURES



2' / 4' Prismatic Wrap CCT Tunable ENVISIONLS Bluetooth



Box Qty for 2ft: 12
Box Qty for 4ft: 6

NEW

Model	Voltage	Watts	Lumens	CCT
LED-WRP-PRM-2FT-20W-TUN-UNV	120-277V	20w	2,300	Tunable 30-65k
LED-WRP-PRM-4FT-40W-TUN-UNV	120-277V	40w	4,600	Tunable 30-65k



2' / 4' Frosted LED Wraps CCT Tunable ENVISIONLS Bluetooth



Box Qty for 2ft: 12
Box Qty for 4ft: 6

NEW

Model	Voltage	Watts	Lumens	CCT
LED-WRP-FR-2FT-24W-TUN-UNV	120-277V	24w	2,760	Tunable 30-65k
LED-WRP-FR-4FT-48W-TUN-UNV	120-277V	48w	5,520	Tunable 30-65k



2' / 4' Tunable White CCT Tunable ENVISIONLS Bluetooth



Box Qty for 2ft: 6
Box Qty for 4ft: 4

NEW

Model	Voltage	Watts	Lumens	CCT
LED-WRP-ARC-10ix2FT-25W-TUN	120-277V	25w	3,250	Tunable 30-65k
LED-WRP-ARC-10ix4FT-50W-TUN	120-277V	50w	6,500	Tunable 30-65k



14" Wide Models



Box Qty for 2ft: 6
Box Qty for 4ft: 4

NEW

Model	Voltage	Watts	Lumens	CCT
LED-WRP-ARC-14ix2FT-25W-TUN	120-277V	25w	3,250	Tunable 30-65k
LED-WRP-ARC-14ix4FT-50W-TUN	120-277V	50w	6,500	Tunable 30-65k



2' / 4' / 8' Round Strip LED Fixture CCT Tunable ENVISIONLS Bluetooth



NEW

Model	Voltage	Watts	Lumens	CCT
LED-RST-2FT-25W-TUN-SR	120-277V	25W	3,500	Tunable 30-65k
LED-RST-4FT-40W-TUN-SR	120-277V	40W	5,200	Tunable 30-65k
LED-RST-4FT-80W-TUN-SR	120-277V	80W	10,400	Tunable 30-65k
LED-RST-8FT-60W-TUN-SR	120-277V	60W	7,800	Tunable 30-65k
LED-RST-8FT-100W-TUN-SR	120-277V	100W	13,000	Tunable 30-65k



NEW

Model	Voltage	Watts	Lumens	CCT
LED-RST-2FT-3M25W-TUN-SR-BL	120-277V	25W	3,500	Tunable 30-65k
LED-RST-4FT-3M40W-TUN-SR-BL	120-277V	40W	5,200	Tunable 30-65k
LED-RST-8FT-3M60W-TUN-SR-BL	120-277V	80W	10,400	Tunable 30-65k
LED-RST-8FT-3M100W-TUN-SR-BL	120-277V	60W	7,800	Tunable 30-65k
LED-RST-8FT-100W-TUN-SR	120-277V	100W	13,000	Tunable 30-65k





2x2 / 2x4 LED Troffer: GLIDE CCT Tunable ENVISIONLS Bluetooth

DLC LISTED ETL LISTED Box Qty. 4


NEW Model	Voltage	Watts	Lumens	CCT
LED-CBT-GL-2X2-3P35-TUN-SR	120-277V	35w	4,000	Tunable 30-65k
LED-CBT-GL-2X4-3P50-TUN-SR	120-277V	50w	5,750	Tunable 30-65k



2x2 / 2x4 LED Center Basket CCT Tunable ENVISIONLS Bluetooth

DLC LISTED ETL LISTED Box Qty. 2
Must Purchase in
Box Quantity to
Avoid Breakage


NEW Model	Voltage	Watts	Lumens	CCT
LED-CBT-2X2-40W-TUN	120-277V	40w	5,000	Tunable 30-65k
LED-CBT-2X2-40W-TUN-EMB	120-277V	40w	5,000	Tunable 30-65k
LED-CBT-2X4-50W-TUN	120-277V	50w	6,250	Tunable 30-65k
LED-CBT-2X4-50W-TUN-EMB	120-277V	50w	6,250	Tunable 30-65k

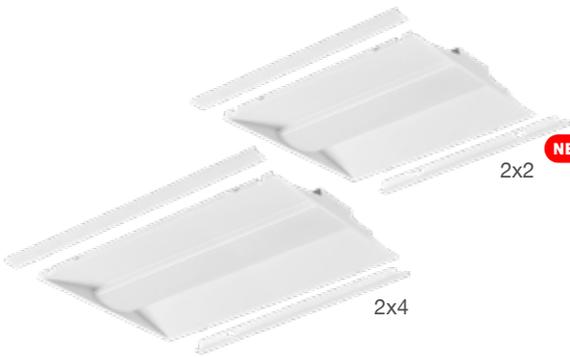

2x2 / 2x4 LED Center Basket Troffer Retrofit Kit CCT Tunable ENVISIONLS Bluetooth

DLC LISTED ETL LISTED Box Qty. 2
Must Purchase in
Box Quantity to
Avoid Breakage


NEW Model	Voltage	Watts	Lumens	CCT
LED-CBT-RK-2X2-40W-TUN	120-277V	40w	5,000	Tunable 30-65k
LED-CBT-RK-2X4-50W-TUN	120-277V	50w	6,250	Tunable 30-65k

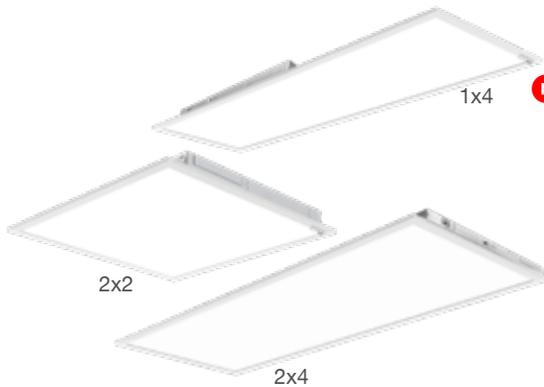

1x4 / 2x2 / 2x4 LED Panel: EdgeLit CCT Tunable ENVISIONLS Bluetooth

DLC LISTED ETL LISTED Box Qty. 2
Must Purchase in
Box Quantity to
Avoid Breakage

NEW Model	Voltage	Watts	Lumens	CCT
LED-BPL-2x2-40W-TUN	120-277V	40w	4,400	Tunable 30-65k
LED-BPL-2x4-50W-TUN	120-277V	50w	5,500	Tunable 30-65k
LED-BPL-1x4-40W-TUN	120-277V	40w	4,400	Tunable 30-65k
LED-BPL-2x2-50W-TUN-HL	120-277V	50w	6,250	Tunable 30-65k
LED-BPL-2x4-65W-TUN-HL	120-277V	65w	8,125	Tunable 30-65k

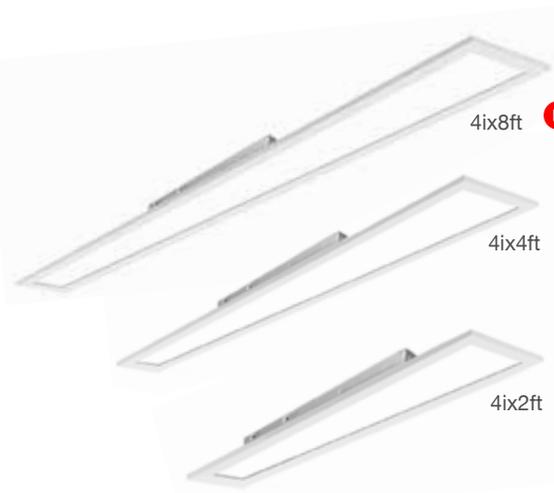

4" Wide LED Panel: Backlit CCT Tunable ENVISIONLS Bluetooth

ETL LISTED DLC LISTED JA8 TITLE 24 Box Qty. 2

NEW Model	Voltage	Watts	Lumens	CCT
LED-BPL-4ix2ft-3M20-TUN	120-277V	20w	2,200	Tunable 30-65k
LED-BPL-4ix4ft-3M40-TUN	120-277V	40w	4,400	Tunable 30-65k
LED-BPL-4ix8ft-3M80-TUN	120-277V	80w	8,800	Tunable 30-65k





Mini Wall Pack: M - 3-CCT w/ Photocell

DLC
E17
Box Qty.
10

Model	Voltage	Watts	Lumens	CCT
LED-WPM-20W-TRI-F-BZ-PC	120-277V	20w	2,860	30/40/50k



Small Wall Pack: S - 3-CCT w/ Photocell

DLC
E17
Box Qty.
4

Model	Voltage	Watts	Lumens	CCT
LED-WPS-29W-TRI-BZ-PC	120-277V	29w	3,799	30/40/50k
LED-WPS-60W-50K-BZ-PC	120-277V	60w	7,860	5000k



*Custom finishes include white, black, gray, and custom, 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.



-BZ

3P60	
WATT	LUMENS
40	5,800
50	7,250
60	8,700



-BL

3P120	
WATT	LUMENS
80	11,600
100	14,500
120	17,400

Selectable Light Direction



-WH

5P60	
WATT	LUMENS
20	2,300
30	4,200
40	5,600
50	7,000
60	8,400

5P120	
WATT	LUMENS
40	5,600
60	8,400
80	11,200
100	14,000
120	16,800

Final
Production



-SHIELD



-WG

Wall Pack: Full - 3-CCT, 5-Power w/ Photocell

DLC
E17
Box Qty.
1

Model	Voltage	Watts	CCT
LED-WPF-5P60-TRI-BZ-PC	120-277V	60/50/40/30/20w	30/40/50k
LED-WPF-5P60-TRI-BL-PC	120-277V	60/50/40/30/20w	30/40/50k
LED-WPF-5P60-TRI-WH-PC	120-277V	60/50/40/30/20w	30/40/50k
LED-WPF-5P120-TRI-BZ-PC	120-277V	120/100/80/60/40w	30/40/50k
LED-WPF-5P120-TRI-BL-PC	120-277V	120/100/80/60/40w	30/40/50k
LED-WPF-5P120-TRI-WH-PC	120-277V	120/100/80/60/40w	30/40/50k



Single CCT

Model	Voltage	Watts	Lumens	CCT
LED-WPF-40W-40K-BZ	120-277V	40w	5,600	4000k

Factory Install Options	Description
Add: -EMB' to model #	Emergency Backup: 90 Minutes 30°-120°F
Add: -CEMB' to model #	Emergency Backup: 90 Minutes Cold Weather -4°-120°F
Add: -BMS' to model #	S-BMS-EXT-1: Bi level motion + daylight sensor
Add: -BMS-BT' to model #	S-BMS-EXT-1-BT: Bi level motion + daylight sensor W/ bluetooth control (EnvisionLS App)
Add: -BMS-SIL to Model #	SILVAIR Enable Bluetooth Control: PIR/Daylight/Zoning/Monitoring
Add: 20KV to model#	SG-20KV-UNV: 20KV surge protector
Add: -HV to model#	347-480V step down transformer



Factory Install Options	Description
WPF-SHIELD	Cut off shield for WPF wall packs
WPF-WG	Wire guard for WPF wall packs
WPF-SL-SHIELD	Cut off Shield for WPF-SL wall packs




-BZ

WATT	LUMENS	WATT	LUMENS
30	3,900	80	10,400
40	5,200	100	13,000
60	7,800	120	15,600



Shield



Wire Guard



Photocell ON/OFF Switch

Slim Wall Pack: SL - 3-CCT, 3-Power w/ Photocell


DLC LISTED Box Qty. 4

Model	Voltage	Watts	CCT
LED-WPF-SL-3P60-TRI-BZ-UNV-PC	120-277V	60/40/30w	30/40/50k
LED-WPF-SL-3P120-TRI-BZ-UNV-PC	120-277V	120/100/80w	30/40/50k
LED-WPF-SL-3P60-TRI-BZ-HV-PC	277-480V	60/40/30w	30/40/50k
LED-WPF-SL-3P120-TRI-BZ-HV-PC	277-480V	120/100/80w	30/40/50k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

Factory Install Options	Description
WPF-SHIELD	Cut off shield for WPF wall packs
WPF-WG	Wire guard for WPF wall packs
WPF-SL-SHIELD	Cut off Shield for WPF-SL wall packs

Factory Install Options	Description
Add: -EMB' to model #	Emergency Backup: 90 Minutes 30' -120'F
Add: -CEMB' to model #	Emergency Backup: 90 Minutes Cold Weather -4' -120' F
Add: -BMS' to model #	S-BMS-EXT-1: Bi level motion + daylight sensor
Add: -BMS-BT' to model #	S-BMS-EXT-1-BT: Bi level motion + daylight sensor W/ bluetooth control (EnvisionLS App)
Add: -BMS-SIL to Model #	SILVAIR Enable Bluetooth Control: PIR/Daylight/Zoning/Monitoring
Add: 20KV to model#	SG-20KV-UNV: 20KV surge protector
Add: -HV to model#	347-480V step down transformer

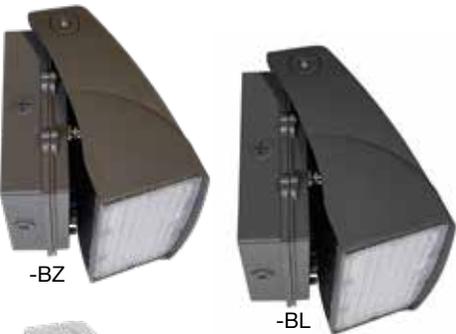

-BZ

-BL



-WH

2200K



90° Adjustable

3P30		3P50		3P80	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
10	1,350	30	4,350	60	8,100
20	2,700	40	5,800	70	9,450
30	4,050	50	7,250	80	13,882

Full Cut Off Wall Pack: AFC - 3-CCT, 3-Power

DLC LISTED Box Qty. 2

Model	Voltage	Watts	CCT
LED-WPFC-ADJ-3P30W-TRI-BZ	120-277V	30/20/10W	30/40/50k
LED-WPFC-ADJ-3P30W-TRI-BL	120-277V	30/20/10W	30/40/50k
LED-WPFC-ADJ-3P30W-TRI-WH	120-277V	30/20/10W	30/40/50k
LED-WPFC-ADJ-3P50W-TRI-BZ	120-277V	50/40/30W	30/40/50k
LED-WPFC-ADJ-3P50W-TRI-BL	120-277V	50/40/30W	30/40/50k
LED-WPFC-ADJ-3P50W-TRI-WH	120-277V	50/40/30W	30/40/50k
LED-WPFC-ADJ-3P80W-TRI-BZ	120-277V	80/70/60W	30/40/50k
LED-WPFC-ADJ-3P80W-TRI-BL	120-277V	80/70/60W	30/40/50k
LED-WPFC-ADJ-3P80W-TRI-WH	120-277V	80/70/60W	30/40/50k

Single CCT Final Production

Model	Voltage	Watts	Lumens	CCT
LED-WPFC-ADJ-55W-50K-BZ	120-277V	55w	6,150	5000k

Full Cut Off Wall Pack: AFC - 2200K

Made to order: 5-7 days

Model	Voltage	Watts	CCT
LED-WPFC-ADJ-3P30W-22K-BZ	120-277V	30/20/10W	2200k
LED-WPFC-ADJ-3P30W-22K-BL	120-277V	30/20/10W	2200k
LED-WPFC-ADJ-3P30W-22K-WH	120-277V	30/20/10W	2200k
LED-WPFC-ADJ-3P50W-22K-BZ	120-277V	50/40/30W	2200k
LED-WPFC-ADJ-3P50W-22K-BL	120-277V	50/40/30W	2200k
LED-WPFC-ADJ-3P50W-22K-WH	120-277V	50/40/30W	2200k
LED-WPFC-ADJ-3P80W-22K-BZ	120-277V	80/70/60W	2200k
LED-WPFC-ADJ-3P80W-22K-BL	120-277V	80/70/60W	2200k
LED-WPFC-ADJ-3P80W-22K-WH	120-277V	80/70/60W	2200k

Factory Install Options	Description
Add: -EMB' to model #	Emergency Backup: 90 Minutes 30' -120'F
Add: -CEMB' to model #	Emergency Backup: 90 Minutes Cold Weather -4' -120' F
Add: -BMS' to model #	S-BMS-EXT-1: Bi level motion + daylight sensor

Factory Install Options	Description
Add: -BMS-BT' to model #	S-BMS-EXT-1-BT: Bi level motion + daylight sensor W/ bluetooth control (EnvisionLS App)
Add: -BMS-SIL to Model #	SILVAIR Enable Bluetooth Control: PIR/Daylight/Zoning/Monitoring
Add: 20KV to model#	SG-20KV-UNV: 20KV surge protector



Shown with Shield



360°



-BZ

WATT	LUMENS
40	4,890
60	8,280
80	10,875



360°



Shield

Rotating Wall Pack: R - Single Module

Box Qty. 4

Model	Voltage	Watts	Lumens	CCT
LED-WPROT2-25WS-TRI-BZ	120-277V	25w	3,600	30/40/50k
LED-WPROT2-40WS-30K-BZ	120-277V	40w	4,890	3000k
LED-WPROT2-40WS-40K-BZ	120-277V	40w	4,890	4000k
LED-WPROT2-40WS-50K-BZ	120-277V	40w	4,890	5000k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

Double Module

Model	Voltage	Watts	Lumens	CCT
LED-WPROT2-3P80WD-TRI-BZ	120-277V	80/60/40w	130 lm/w	30/40/50k
LED-WPROT2-60WD-TRI-BZ	120-277V	60w	8,280	30/40/50k
LED-WPROT2-80WD-30K-BZ	120-277V	80w	10,875	3000k
LED-WPROT2-80WD-40K-BZ	120-277V	80w	10,875	4000k
LED-WPROT2-80WD-50K-BZ	120-277V	80w	10,875	5000k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

Factory Install Options	Description
WPROT-SHIELD	Wall pack: R-line shield
Factory Install Options	Description
Add: -EMB' to model #	Emergency Backup: 90 Minutes 30°-120°F
Add: -BMS' to model #	S-BMS-EXT-1: Bi level motion + daylight sensor
Add: -BMS-BT' to model #	S-BMS-EXT-1-BT: Bi level motion + daylight sensor W/ bluetooth control (EnvisionLS App)
Add: -BMS-SIL to Model #	SILVAIR Enable Bluetooth Control: PIR/Daylight/Zoning/Monitoring
Add: 20KV to model#	SG-20KV-UNV: 20KV surge protector
Add: -HV to model#	347-480V step down transformer



-BZ

-BL

NEW

-WH

2200K

5P60		5P120	
WATT	LUMENS	WATT	LUMENS
20	2,900	80	11,600
30	4,350	90	13,050
40	5,800	100	14,500
50	7,250	110	15,950
60	8,700	120	17,400

Full Cutoff Wall Pack: Flat-FC - 3-CCT, 5-Power w/ Photocell

Box Qty. 2

Model	Voltage	Watts	CCT
LED-WPFC-FL-5P60W-TRI-BZ-PC	120-277V	60/50/40/30/20W	30/40/50k
LED-WPFC-FL-5P60W-TRI-BL-PC	120-277V	60/50/40/30/20W	30/40/50k
LED-WPFC-FL-5P60W-TRI-WH-PC	120-277V	60/50/40/30/20W	30/40/50k
LED-WPFC-FL-5P120W-TRI-BZ-PC	120-277V	120/110/100/90/80W	30/40/50k
LED-WPFC-FL-5P120W-TRI-BL-PC	120-277V	120/110/100/90/80W	30/40/50k
LED-WPFC-FL-5P120W-TRI-WH-PC	120-277V	120/110/100/90/80W	30/40/50k

2200K 5-Power, w/ Photocell

Made to order: 5-7 days

Model	Voltage	Watts	CCT
LED-WPFC-FL-5P60W-22K-BZ-PC	120-277V	60/50/40/30/20W	2200k
LED-WPFC-FL-5P60W-22K-BL-PC	120-277V	60/50/40/30/20W	2200k
LED-WPFC-FL-5P60W-22K-WH-PC	120-277V	60/50/40/30/20W	2200k
LED-WPFC-FL-5P120W-22K-BZ-PC	120-277V	120/110/100/90/80W	2200k
LED-WPFC-FL-5P120W-22K-BL-PC	120-277V	120/110/100/90/80W	2200k
LED-WPFC-FL-5P120W-22K-WH-PC	120-277V	120/110/100/90/80W	2200k

Factory Install Options	Description
Add: -EMB' to model #	Emergency Backup: 90 Minutes 30°-120°F
Add: -CEMB' to model #	Emergency Backup: 90 Minutes Cold Weather -4°-120°F
Add: -BMS' to model #	S-BMS-EXT-1: Bi level motion + daylight sensor
Add: -BMS-BT' to model #	S-BMS-EXT-1-BT: Bi level motion + daylight sensor W/ bluetooth control (EnvisionLS App)
Add: -BMS-SIL to Model #	SILVAIR Enable Bluetooth Control: PIR/Daylight/Zoning/Monitoring
Add: 20KV to model#	SG-20KV-UNV: 20KV surge protector
Add: -HV to model#	347-480V step down transformer

Cut Off Wall Pack Trapezoid - 3-CCT
5-Power w/ Photocell



Box Qty. 1



Model	Voltage	Watts	CCT
LED-WPFC-TRZ-5P60-TRI-BZ-PC	120-277V	60/50/40/30/20w	30/40/50k
LED-WPFC-TRZ-5P60-TRI-BL-PC	120-277V	60/50/40/30/20w	30/40/50k
LED-WPFC-TRZ-5P60-TRI-WH-PC	120-277V	60/50/40/30/20w	30/40/50k
LED-WPFC-TRZ-5P120-TRI-BZ-PC	120-277V	120/110/100/90/80w	30/40/50k
LED-WPFC-TRZ-5P120-TRI-BL-PC	120-277V	120/110/100/90/80w	30/40/50k
LED-WPFC-TRZ-5P120-TRI-WH-PC	120-277V	120/110/100/90/80w	30/40/50k

5P60		5P120	
WATT	LUMENS	WATT	LUMENS
20	2,900	80	11,600
30	4,350	90	13,050
40	5,800	100	14,500
50	7,250	110	15,950
60	8,700	120	17,400



Cut Off Wall Pack Trapezoid - 2200K



Box Qty. 1



NEW

Model	Voltage	Watts	CCT
LED-WPFC-TRZ-5P60-22K-BZ-PC	120-277V	60/50/40/30/20w	2200k
LED-WPFC-TRZ-5P60-22K-BL-PC	120-277V	60/50/40/30/20w	2200k
LED-WPFC-TRZ-5P60-22K-WH-PC	120-277V	60/50/40/30/20w	2200k
LED-WPFC-TRZ-5P120-22K-BZ-PC	120-277V	120/110/100/90/80w	2200k
LED-WPFC-TRZ-5P120-22K-BL-PC	120-277V	120/110/100/90/80w	2200k
LED-WPFC-TRZ-5P120-22K-WH-PC	120-277V	120/110/100/90/80w	2200k

Full-Cutoff Wall Pack: FC - 3-CCT, 5-Power w/ Photocell



Box Qty. 1



Model	Voltage	Watts	CCT
LED-WPFC-5P80-TRI-BZ-PC	120-277V	80/64/48/32/16w	30/40/50k
LED-WPFC-5P80-TRI-BL-PC	120-277V	80/64/48/32/16w	30/40/50k
LED-WPFC-5P80-TRI-WH-PC	120-277V	80/64/48/32/16w	30/40/50k
LED-WPFC-5P80-TRI-BZ-HV-PC	277-480V	80/64/48/32/16w	30/40/50k
LED-WPFC-5P150-TRI-BZ-PC	120-277V	150/120/90/60/30w	30/40/50k
LED-WPFC-5P150-TRI-BL-PC	120-277V	150/120/90/60/30w	30/40/50k
LED-WPFC-5P150-TRI-WH-PC	120-277V	150/120/90/60/30w	30/40/50k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

5P80		5P150	
WATT	LUMENS	WATT	LUMENS
16	2,320	30	4,350
32	4,640	60	8,700
48	6,960	90	13,050
64	9,280	120	17,400
80	11,600	150	21,750



Full-Cutoff Wall Pack: FC - 2200K

Made to order: 5-7 days




Box Qty. 1



NEW

Model	Voltage	Watts	CCT
LED-WPFC-5P80-22K-BZ-PC	120-277V	80/64/48/32/16w	2200k
LED-WPFC-5P80-22K-BL-PC	120-277V	80/64/48/32/16w	2200k
LED-WPFC-5P80-22K-WH-PC	120-277V	80/64/48/32/16w	2200k
LED-WPFC-5P80-22K-BZ-HV-PC	277-480V	80/64/48/32/16w	2200k
LED-WPFC-5P150-22K-BZ-PC	120-277V	150/120/90/60/30w	2200k
LED-WPFC-5P150-22K-BL-PC	120-277V	150/120/90/60/30w	2200k
LED-WPFC-5P150-22K-WH-PC	120-277V	150/120/90/60/30w	2200k

Factory Install Options	Description
Add: -T2 to Model #	Factory installed type II Beam (Not available on 22K option)
Add: -T4 to Model #	Factory installed type IV Beam (Not available on 22K option)
Add: -EMB' to model #	Emergency Backup: 90 Minutes 30°-120° F
Add: -CEMB' to model #	Emergency Backup: 90 Minutes Cold Weather -4°-120° F
Add '-BMS' to model #	S-BMS-EXT-1: Bi level motion + daylight sensor
Add '-BMS-BT' to model #	S-BMS-EXT-1-BT: Bi level motion + daylight sensor W/ bluetooth control (EnvisionLS App)
Add: -BMS-SIL to Model #	SILVAIR Enable Bluetooth Control: PIR/Daylight/Zoning/Monitoring

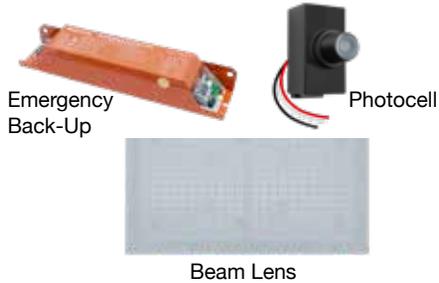



-BZ



-BL



-WH



Photocell ON/OFF Switch

WATT	LUMENS
48	6,480
64	8,640
80	10,800



Beam Lens



Bi-Level Motion



Emergency Back-Up

Semi-Circle Wall Pack: CIRCLE - 3-CCT, 3-Power w/ Photocell

Box Qty. 1

Model	Voltage	Watts	CCT
LED-WPFC-SC-3P80-TRI-BZ-PC	120-347V	80/64/48w	30/40/50k
LED-WPFC-SC-3P80-TRI-BL-PC	120-347V	80/64/48w	30/40/50k
LED-WPFC-SC-3P80-TRI-WH-PC	120-347V	80/64/48w	30/40/50k



Factory Install Options	Description
Add '-EMB' to model #	Emergency backup (internal 8W)
Add '-BMS' to model #	S-BMS-EXT-1: Bi level motion + daylight sensor
Add '-BMS-BT' to model #	S-BMS-EXT-1-BT: Bi level motion + daylight sensor W/ bluetooth control (EnvisionLS App)
Add: -T4 to Model #	Factory installed type IV
Add: -T5 to Model #	Factory installed type V
Add: -BMS-SIL to Model #	SILVAIR Enable Bluetooth Control: PIR/Daylight/Zoning/Monitoring
Add: 20KV to model#	SG-20KV-UNV: 20KV surge protector
SC-T-IV	Wall pack: FC-line: Type IV Beam lens
SC-T-V	Wall pack: FC-Line: Type V Beams Lens



Half Cylinder Wall Pack: CIRCLE - 3-CCT, 3-Power w/ Photocell

Box Qty. 1

Model	Voltage	Watts	CCT
LED-WPUD-SC-3P80-TRI-BZ-PC	120-347V	80/64/48w	30/40/50k
LED-WPUD-SC-3P80-TRI-BL-PC	120-347V	80/64/48w	30/40/50k
LED-WPUD-SC-3P80-TRI-WH-PC	120-347V	80/64/48w	30/40/50k



NEW

Model	Voltage	Watts	CCT
LED-WPUD-SC-3P40-TRI-BZ-PC	120-347V	40/32/24w	30/40/50k
LED-WPUD-SC-3P40-TRI-BL-PC	120-347V	40/32/24w	30/40/50k
LED-WPUD-SC-3P40-TRI-WH-PC	120-347V	40/32/24w	30/40/50k



Factory Install Options	Description
Add '-EMB' to model #	Emergency backup (internal 8W)
Add '-BMS' to model #	S-BMS-EXT-1: Bi level motion + daylight sensor
Add '-BMS-BT' to model #	S-BMS-EXT-1-BT: Bi level motion + daylight sensor W/ bluetooth control (EnvisionLS App)
Add: -T4 to Model #	Factory installed type IV
Add: -T5 to Model #	Factory installed type V
Add: -BMS-SIL to Model #	SILVAIR Enable Bluetooth Control: PIR/Daylight/Zoning/Monitoring
Add: 20KV to model#	SG-20KV-UNV: 20KV surge protector
SC-T-IV	Wall pack: FC-line: Type IV Beam lens
SC-T-V	Wall pack: FC-Line: Type V Beams Lens




-BZ



-BL



-WH



Photocell ON/OFF Switch

3P80

DOWNLIGHT ON ONLY		DOWN & UP LIGHT ON			
WATT	LUMENS	DOWN		UP	
48	6,960	38	5,510	10	1,450
64	9,280	51	7,395	13	1,885
80	11,600	64	9,280	16	2,320

3P40

DOWNLIGHT ON ONLY		DOWN & UP LIGHT ON			
WATT	LUMENS	DOWN		UP	
24	3,480	19	2,755	5	725
32	4,640	26	3,770	6	870
40	5,800	32	4,640	8	1,160



Bi-Level Motion

Emergency Back-Up



Round Checker Bulkhead - 3-CCT w/ Photocell

Box Qty. 6

NEW

Model	Voltage	Watts	CCT
LED-WPBH-RDCH-3P15-TRI-BZ-PC	120-277V	15/12/9w	30/40/50k
LED-WPBH-RDCH-3P15-TRI-BL-PC	120-277V	15/12/9w	30/40/50k
LED-WPBH-RDCH-3P15-TRI-WH-PC	120-277V	15/12/9w	30/40/50k

3CCT

WATT	LUMENS
9	810
12	1,080
15	1,350



Photocell ON/OFF Switch



Round Halfmoon Bulkhead - 3-CCT w/ Photocell

Box Qty. 6

NEW

Model	Voltage	Watts	CCT
LED-WPBH-RDSC-3P15-TRI-BZ-PC	120-277V	15/12/9w	30/40/50k
LED-WPBH-RDSC-3P15-TRI-BL-PC	120-277V	15/12/9w	30/40/50k
LED-WPBH-RDSC-3P15-TRI-WH-PC	120-277V	15/12/9w	30/40/50k

3CCT

WATT	LUMENS
9	810
12	1,080
15	1,350



Photocell ON/OFF Switch



Oval Checker Bulkhead - 3-CCT, 3-Power w/ Photocell

Box Qty. 6

Model	Voltage	Watts	CCT
LED-WPBH-3P20-TRI-BZ-PC	120-277V	20/16/12	30/40/50k
LED-WPBH-3P20-TRI-BL-PC	120-277V	20/16/12	30/40/50k
LED-WPBH-3P20-TRI-WH-PC	120-277V	20/16/12	30/40/50k

3CCT

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

WATT	LUMENS
12	1,020
16	1,360
20	1,700



Slim Wall Pack: EGG- 3-CCT Select

Box Qty. 10

Model	Voltage	Watts	Lumens	CCT
LED-WPE-15W-TRI-PC-BZ	120-277V	15w	1950	30/40/50k
LED-WPE-15W-TRI-PC-BZ-EMB	120-277V	15w	1950	30/40/50k
LED-WPE-15W-TRI-PC-BL	120-277V	15w	1950	30/40/50k
LED-WPE-15W-TRI-PC-BL-EMB	120-277V	15w	1950	30/40/50k

3CCT

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

Selectable Wall Pack: Full-FC - 3-CCT, 3-Power w/ Photocell

3 CCT
Box Qty. 1




-BZ



Model	Voltage	Watts	CCT
LED-WPF-FC-21-3P100-TRI-BZ-PC	120-277V	100/80/60W	30/40/50k
LED-WPF-FC-21-3P100-TRI-BL-PC	120-277V	100/80/60W	30/40/50k

Factory Install Options	Description
Add '-EMB' to model #	Emergency backup (internal 8W)
Add '-CEMB' to model #	Emergency Backup: 90 Minutes Cold Weather -4°-120°F
Add '-BMS' to model #	S-BMS-EXT-1: Bi level motion + daylight sensor
Add '-BMS-BT' to model #	S-BMS-EXT-1-BT: Bi level motion + daylight sensor W/ bluetooth control (EnvisionLS App)
Add: -BMS-SIL to Model #	SILVAIR Enable Bluetooth Control: PIR/Daylight/Zoning/Monitoring
Add: -HV to model#	347-480V Step Down Transformer
Add: -T4 to Model #	Factory installed type IV
Add: -T5 to Model #	Factory installed type V

WATT	LUMENS
60	8,100
80	10,800
100	13,500



Full Cut Off Wall Pack: ARCY - 3-CCT, 3-Power w/ Photocell

3 CCT
Box Qty. 2



Downlight Application

-BZ



Uplight Application

-BL



-BL




-WH

Model	Voltage	Watts	CCT
LED-WPFC-ARC-3P65-TRI-BZ-PC	120-347V	65/50/30W	30/40/50k
LED-WPFC-ARC-3P65-TRI-BL-PC	120-347V	65/50/30W	30/40/50k
LED-WPFC-ARC-3P65-TRI-WH-PC	120-347V	65/50/30W	30/40/50k
LED-WPFC-ARC-3P100-TRI-BZ-PC	120-347V	100/80/60W	30/40/50k
LED-WPFC-ARC-3P100-TRI-BL-PC	120-347V	100/80/60W	30/40/50k
LED-WPFC-ARC-3P100-TRI-WH-PC	120-347V	100/80/60W	30/40/50k

Accessory Model	Description
WPFC-ARC-JBOX-BZ	WPFC-ARC : Wall Mount Bracket for conduit runs
WPFC-ARC-JBOX-BL	WPFC-ARC : Wall Mount Bracket for conduit runs
WPFC-ARC-JBOX-WH	WPFC-ARC : Wall Mount Bracket for conduit runs

Factory Install Options	Description
Add '-EMB' to model #	Emergency backup (internal 8W)
Add '-BMS' to model #	S-BMS-EXT-1: Bi level motion + daylight sensor
Add '-BMS-BT' to model #	S-BMS-EXT-1-BT: Bi level motion + daylight sensor W/ bluetooth control (EnvisionLS App)
Add: -BMS-SIL to Model #	SILVAIR Enable Bluetooth Control: PIR/Daylight/Zoning/Monitoring
Add: 20KV to model#	SG-20KV-UNV: 20KV surge protector
Add: -T4 to Model #	Factory installed type IV
Add: -T5 to Model #	Factory installed type V


WATT	LUMENS
30	3,900
50	6,500
60	7,800
65	8,450
80	10,400
100	13,000

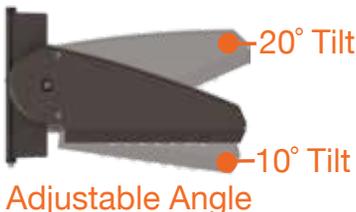

WPFC-ARC-JBOX-BZ / BL / WH

Bi-Level Motion

Square Straight Steel Poles



1 SQUARE STRAIGHT STEEL SERIES	EFFECTIVE PROJECTED AREAS				BOLT CIRCLE	BASE PLATE	
	80	90	100	120		SQUARE	HEIGHT
ENV-SQ-SS-10FT-4-11G-AB 10 Feet 4" • 11 Gauge	25.7	20.8	16.8	11.8	8.5	8.0	0.75
ENV-SQ-SS-12FT-4-11G-AB 12 Feet 4" 11 Gauge	20.5	16.6	13.4	9.4	8.5	8.0	0.75
ENV-SQ-SS-14FT-4-11G-AB 14 Feet 4" 11 Gauge	16.6	13.5	10.9	7.7	8.5	8.0	0.75
ENV-SQ-SS-15FT-4-11G-AB 15 Feet 4" 11 Gauge	15.1	12.3	9.8	7.0	8.5	8.0	0.75
ENV-SQ-SS-16FT-4-11G-AB 16 Feet 4" 11 Gauge	13.6	11.0	8.9	6.3	8.5	8.0	0.75
ENV-SQ-SS-18FT-4-11G-AB 18 Feet 4" 11 Gauge	11.1	9.0	7.2	5.1	8.5	8.0	0.75
ENV-SQ-SS-20FT-4-11G-AB 20 Feet 4" 11 Gauge	9.0	7.3	5.9	4.2	8.5	8.0	0.75
ENV-SQ-SS-20FT-4-7G-AB 20 Feet 4" 7 Gauge	15.9	12.5	10.1	7.1	8.5	8.0	0.75
ENV-SQ-SS-20FT-5-11G-AB 20 Feet 5" 11 Gauge	16.0	12.9	10.4	7.4	11.0	11.0	0.75
ENV-SQ-SS-20FT-5-7G-AB 20 Feet 5" 7 Gauge	26.4	21.3	17.2	12.1	11.0	11.0	1.0
ENV-SQ-SS-25FT-4-11G-AB 25 Feet 4" 11 Gauge	9.7	7.8	6.3	4.5	8.5	8.0	0.75
ENV-SQ-SS-25FT-4-7G-AB 25 Feet 4" 7 Gauge	9.7	7.8	6.3	4.5	8.5	8.0	0.75
ENV-SQ-SS-25FT-5-11G-AB 25 Feet 5" 11 Gauge	8.5	6.9	5.6	4.0	11.0	11.0	0.75
ENV-SQ-SS-25FT-5-7G-AB 25 Feet 5" 7 Gauge	17.5	14.5	11.4	8.1	11.0	11.0	1.0
ENV-SQ-SS-25FT-6-7G-AB 25 Feet 6" 7 Gauge	27.5	22.3	18.0	12.6	11.5	12.0	1.0
ENV-SQ-SS-30FT-5-11G-AB 30 Feet 5" 11 Gauge	4.2	3.4	2.7	1.9	11.0	11.0	0.75
ENV-SQ-SS-30FT-5-7G-AB 30 Feet 5" 7 Gauge	10.6	8.6	6.9	4.9	11.0	11.0	1.0
ENV-SQ-SS-30FT-6-7G-AB 30 Feet 6" 7 Gauge	17.9	14.5	11.7	8.3	11.5	12.0	1.0
ENV-SQ-SS-35FT-5-7G-AB 35 Feet 5" 7 Gauge	6.1	4.9	4.0	2.8	11.0	11.0	1.0
ENV-SQ-SS-35FT-6-7G-AB 35 Feet 6" 7 Gauge	11.8	9.6	7.7	5.5	11.5	12.0	1.0
ENV-SQ-SS-39FT-6-7G-AB 39 Feet 6" 7 Gauge	7.7	6.2	4.0	3.5	11.5	12.0	1.0

EPA RATINGS INCLUDE A 1.3 GUST FACTOR
VIBRATION DAMPENERS INCLUDED AND INSTALLED ON POLES 25' HIGHER

GAUGE	ANCHOR BOLT DIAMETER
11 Gauge	.75 X 20
7 Gauge	1 X 40

ANCHOR BOLTS SHOULD BE SET USING FACTORY
SUPPLIED TEMPLATES

Round Straight Steel Poles

1 ROUND STRAIGHT STEEL SERIES	EFFECTIVE PROJECTED AREAS			
	80	90	100	120
ENV-RD-SS-8FT-3-11G-AB 8 Feet 3" • 11 Gauge	11.2	8.4	6.2	3.7
ENV-RD-SS-10FT-3-11G-AB 10 Feet 3" 11 Gauge	9.0	6.7	5.0	3.0
ENV-RD-SS-12FT-3-11G-AB 12 Feet 3" 11 Gauge	6.9	5.0	3.9	2.1
ENV-RD-SS-14FT-3-11G-AB 14 Feet 3" 11 Gauge	5.5	3.9	2.9	1.4
ENV-RD-SS-14FT-4-11G-AB 14 Feet 4" 11 Gauge	11.7	8.9	7.1	4.0
ENV-RD-SS-16FT-4-11G-AB 16 Feet 4" 11 Gauge	9.0	6.8	5.3	2.9
ENV-RD-SS-18FT-4-11G-AB 18 Feet 4" 11 Gauge	7.1	5.2	4.0	2.2
ENV-RD-SS-20FT-4-11G-AB 20 Feet 4" 11 Gauge	5.6	4.1	3.1	1.7
ENV-RD-SS-25FT-5-11G-AB 25 Feet 5" 11 Gauge	6.7	5.0	3.7	2.0
ENV-RD-SS-25FT-5-7G-AB 25 Feet 5" 7 Gauge	12.0	9.2	7.5	4.2
ENV-RD-SS-30FT-5-11G-AB 30 Feet 5" 11 Gauge	4.0	2.8	2.0	N/A
ENV-RD-SS-30FT-5-7G-AB 30 Feet 5" 7 Gauge	7.9	6.6	4.8	2.7

EPA RATINGS INCLUDE A 1.3 GUST FACTOR

VIBRATION DAMPENERS INCLUDED AND INSTALLED ON POLES 25' HIGHER

GAUGE	ANCHOR BOLT DIAMETER	BOLT CIRCLE	BASE PLATE
11 Gauge	.75 X 20	8.5	8 SQ X 0.75 Height
7 Gauge	1 X 40	10.0	10 SQ X 1 Height

ANCHOR BOLTS SHOULD BE SET USING FACTORY SUPPLIED TEMPLATES

FIXTURE ARRANGEMENT NOTES	COLOR FINISH NOTES
D1 1 Fixture	BZ RAL8019
D2@90 2 Fixtures	BL
D2@180 2 Fixtures Opposite Sides	WH
D3@90 3 Fixtures 3 Sides	GRY Cardinal 6403-26307
D4 4 Fixtures All Sides	SLV Cardinal 6423-GR06-P



-KN
Knuckle



3-CCT
Button



-KN
Knuckle



180° Tilt
Angle



-TR
Trunnion



2200K

2P30		2P50	
WATT	LUMENS	WATT	LUMENS
15	2,100	35	4,900
30	4,200	50	7,000

3P80	
WATT	LUMENS
60	8,400
70	9,800
80	11,200

Final Production



SFA Bracket works
as a straight arm
or slip fitter mount


Final Production



-BZ Shield



-WH Shield



Wire Guard

Mini Area Flood Lights: M - 3-CCT, 2-Power w/ Photocell

Box Qty.
2P30- 8
2P50- 6
3P80- 5

3CCT

Model	Voltage	Watts	CCT
LED-ARL-2P30-TRI-BZ-TR-PC	120-277V	30/15w	30/40/50k
LED-ARL-2P30-TRI-BZ-KN-PC	120-277V	30/15w	30/40/50k
LED-ARL-2P30-TRI-WH-KN-PC	120-277V	30/15w	30/40/50k
LED-ARL-2P50-TRI-BZ-TR-PC	120-277V	50/35w	30/40/50k
LED-ARL-2P50-TRI-BZ-KN-PC	120-277V	50/35w	30/40/50k
LED-ARL-2P50-TRI-WH-KN-PC	120-277V	50/35w	30/40/50k
LED-ARL-2P50-TRI-WH-TR-PC	120-277V	50/35w	30/40/50k
LED-ARL-3P80-TRI-BZ-KN-PC	120-277V	80/70/60w	30/40/50k
LED-ARL-3P80-TRI-WH-KN-PC	120-277V	80/70/60w	30/40/50k
LED-ARL-3P80-TRI-BZ-TR-PC	120-277V	80/70/60w	30/40/50k

Mini Area Flood Lights: M - 2200K 2-Power w/ Photocell

Made to order: 5-7 days

Box Qty.
2P30- 8
2P50- 6
3P80- 5

NEW

Model	Voltage	Watts	CCT
LED-ARL-2P30-22K-BZ-TR-PC	120-277V	30/15w	2200k
LED-ARL-2P30-22K-BZ-KN-PC	120-277V	30/15w	2200k
LED-ARL-2P30-22K-WH-KN-PC	120-277V	30/15w	2200k
LED-ARL-2P50-22K-BZ-TR-PC	120-277V	50/35w	2200k
LED-ARL-2P50-22K-WH-TR-PC	120-277V	50/35w	2200k
LED-ARL-2P50-22K-BZ-KN-PC	120-277V	50/35w	2200k
LED-ARL-2P50-22K-WH-KN-PC	120-277V	50/35w	2200k
LED-ARL-3P80-22K-BZ-KN-PC	120-277V	80/70/60w	2200k
LED-ARL-3P80-22K-WH-KN-PC	120-277V	80/70/60w	2200k
LED-ARL-3P80-22K-BZ-TR-PC	120-277V	80/70/60w	2200k

15W/30W/80W 3-CCT Select

Box Qty. 8

Model	Voltage	Watts	Lumens	CCT
LED-ARL-15W-TRI-BZ-TR	120-277V	15w	2,100	30/40/50k
LED-ARL-15W-TRI-BZ-KN	120-277V	15w	2,100	30/40/50k
LED-ARL-30W-TRI-BZ-TR	120-277V	30w	3,819	30/40/50k
LED-ARL-80W-TRI-BZ-SFA	120-277V	80w	11,200	30/40/50k

Single CCT

Box Qty. 8

Model	Voltage	Watts	Lumens	CCT
LED-ARL-15W-30K-BZ-TR	120-277V	15W	2,100	3000k
LED-ARL-30W-30K-BZ-TR	120-277V	30W	3,800	3000k
LED-ARL-30W-30K-WH-KN	120-277V	30W	3,800	3000k
LED-ARL-50W-30K-BZ-TR	120-277V	50W	6,800	3000k

Accessory Model	Description
ARL-15/30W-SHIELD-BZ	Area light 15W shield
ARL-15/30W-SHIELD-WH	Area light 15W shield
ARL-15/30W-WG	Area light 15W wire guard
ARL-50W-SHIELD-BZ	Area light 50W shield
ARL-50W-SHIELD-WH	Area light 50W shield
ARL-50W-WG	Area light 50W wire guard
ARL-80W-SHIELD-BZ	Area light 80W shield
ARL-80W-SHIELD-WH	Area light 80W shield
ARL-80W-WG	Area light 80W wire guard



3-CCT Photocell ON/OFF Switch

Mini Area Floodlights: XS - 3-CCT, 3-Power w/ Photocell

Box Qty. 8

Model	Voltage	Watts	CCT
LED-FL-15W-TRI-BZ-KNYK-PC	120-277V	15w	30/40/50k
LED-FL-15W-TRI-BL-KNYK-PC	120-277V	15w	30/40/50k
LED-FL-15W-TRI-WH-KNYK-PC	120-277V	15w	30/40/50k
LED-FL-30W-TRI-BZ-KNYK-PC	120-277V	30w	30/40/50k
LED-FL-30W-TRI-BL-KNYK-PC	120-277V	30w	30/40/50k
LED-FL-30W-TRI-WH-KNYK-PC	120-277V	30w	30/40/50k
LED-FL-3P60-TRI-BZ-KNYK-PC	120-277V	60/50/40w	30/40/50k
LED-FL-3P60-TRI-BL-KNYK-PC	120-277V	60/50/40w	30/40/50k
LED-FL-3P60-TRI-WH-KNYK-PC	120-277V	60/50/40w	30/40/50k
LED-FL-3P100-TRI-BZ-KNYK-PC	120-277V	100/80/60w	30/40/50k
LED-FL-3P100-TRI-BL-KNYK-PC	120-277V	100/80/60w	30/40/50k
LED-FL-3P100-TRI-WH-KNYK-PC	120-277V	100/80/60w	30/40/50k
LED-FL-3P150-TRI-BZ-KNYK-PC	120-277V	150/120/100w	30/40/50k
LED-FL-3P150-TRI-BL-KNYK-PC	120-277V	150/120/100w	30/40/50k
LED-FL-3P150-TRI-WH-KNYK-PC	120-277V	150/120/100w	30/40/50k

15W		30W		3P60		3P100		3P150	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
15	1,950	30	3,900	40	5,200	60	8,100	100	13,500
				50	6,500	80	10,800	120	16,200
				60	7,800	100	13,500	150	20,250



Trunion Included

Mini Flood Light: ARCY - 3-CCT, 3-Power w/ Photocell

Box Qty. 2

Model	Voltage	Watts	CCT
LED-ARL3-ARC-3P30-TRI-BZ-UNV-KNT-PC	120-277V	30/25/15w	30/40/50k
LED-ARL3-ARC-3P60-TRI-BZ-UNV-KNT-PC	120-277V	60/50/40w	30/40/50k
LED-ARL3-ARC-3P100-TRI-BZ-UNV-KNT-PC	120-277V	100/80/60w	30/40/50k

3P30		3P60		3P100	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
15	2,250	40	6,000	60	9,000
25	3,750	50	7,500	80	12,000
30	4,500	60	9,000	100	15,000



Large Flood Lights: ARCY - 3-CCT, 3-Power w/ Photocell

Box Qty. 2


Model	Voltage	Watts	CCT
LED-ARL3-ARC-3P150-TRI-BZ-UNV-PC	120-277V	150/120/80w	30/40/50k
LED-ARL3-ARC-3P150-TRI-BL-UNV-PC	120-277V	150/120/80w	30/40/50k
LED-ARL3-ARC-3P150-TRI-WH-UNV-PC	120-277V	150/120/80w	30/40/50k
LED-ARL3-ARC-3P150-TRI-BZ-HV-PC	277-480V	150/120/80w	30/40/50k
LED-ARL3-ARC-3P300-TRI-BZ-UNV-PC	120-277V	300/240/180w	30/40/50k
LED-ARL3-ARC-3P300-TRI-BL-UNV-PC	120-277V	300/240/180w	30/40/50k
LED-ARL3-ARC-3P300-TRI-WH-UNV-PC	120-277V	300/240/180w	30/40/50k
LED-ARL3-ARC-3P300-TRI-BZ-HV-PC	277-480V	300/240/180w	30/40/50k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

3P150		3P300	
WATT	LUMENS	WATT	LUMENS
80	12,000	180	27,000
120	18,000	240	36,000
150	22,500	300	45,000



Area Light: Optic-Line Beam (Selectable) 3-CCT, 3-Beam, 3-Power

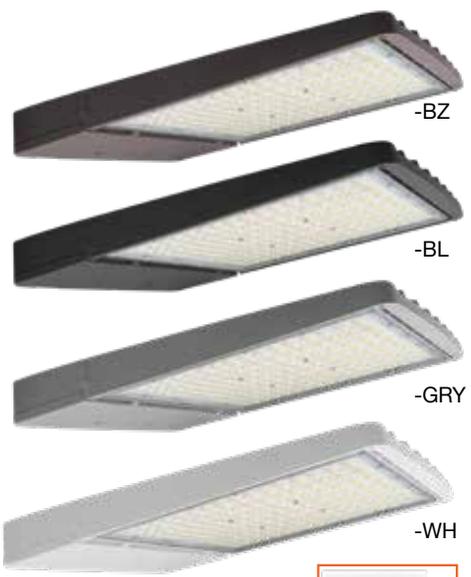

Beam Angle

5P150	
WATT	LUMENS
50	7,500
75	11,250
100	15,000
125	18,750
150	22,500

5P300	
WATT	LUMENS
180	27,000
210	31,500
240	36,000
270	40,500
300	45,000

5P430	
WATT	LUMENS
310	46,500
340	51,000
370	55,500
400	60,000
430	64,500




2200K

Made to order: 5-7 days

NEW

Model	Voltage	Watts	CCT
LED-ARL3-3B-5P150-22K-BZ-UNV	120-277V	150/125/100/75/50w	2200k
LED-ARL3-3B-5P150-22K-BL-UNV	120-277V	150/125/100/75/50w	2200k
LED-ARL3-3B-5P150-22K-WH-UNV	120-277V	150/125/100/75/50w	2200k
LED-ARL3-3B-5P150-22K-GRY-UNV	120-277V	150/125/100/75/50w	2200k
LED-ARL3-3B-5P150-22K-BZ-HV	277-480V	150/125/100/75/50w	2200k
LED-ARL3-3B-5P150-22K-BL-HV	277-480V	150/125/100/75/50w	2200k
LED-ARL3-3B-5P150-22K-WH-HV	277-480V	150/125/100/75/50w	2200k
LED-ARL3-3B-5P150-22K-GRY-HV	277-480V	150/125/100/75/50w	2200k
LED-ARL3-3B-5P300-22K-BZ-UNV	120-277V	300/270/240/210/180w	2200k
LED-ARL3-3B-5P300-22K-BL-UNV	120-277V	300/270/240/210/180w	2200k
LED-ARL3-3B-5P300-22K-WH-UNV	120-277V	300/270/240/210/180w	2200k
LED-ARL3-3B-5P300-22K-GRY-UNV	120-277V	300/270/240/210/180w	2200k
LED-ARL3-3B-5P300-22K-BZ-HV	277-480V	300/270/240/210/180w	2200k
LED-ARL3-3B-5P300-22K-BL-HV	277-480V	300/270/240/210/180w	2200k
LED-ARL3-3B-5P300-22K-WH-HV	277-480V	300/270/240/210/180w	2200k
LED-ARL3-3B-5P300-22K-GRY-HV	277-480V	300/270/240/210/180w	2200k
LED-ARL3-3B-5P430-22K-BZ-UNV	120-277V	430/400/370/340/310w	2200k
LED-ARL3-3B-5P430-22K-BL-UNV	120-277V	430/400/370/340/310w	2200k
LED-ARL3-3B-5P430-22K-WH-UNV	120-277V	430/400/370/340/310w	2200k
LED-ARL3-3B-5P430-22K-GRY-UNV	120-277V	430/400/370/340/310w	2200k
LED-ARL3-3B-5P430-22K-BZ-HV	277-480V	430/400/370/340/310w	2200k
LED-ARL3-3B-5P430-22K-BL-HV	277-480V	430/400/370/340/310w	2200k
LED-ARL3-3B-5P430-22K-WH-HV	277-480V	430/400/370/340/310w	2200k
LED-ARL3-3B-5P430-22K-GRY-HV	277-480V	430/400/370/340/310w	2200k

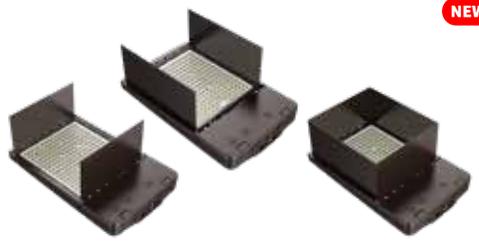

Accessory Model	Description
ARL3-3B-L-HSS-BZ	ARL3: Beam-Line: 4 Piece Shield for 5P150 BACK/FRONT/SIDES
ARL3-3B-L-HSS-BL	ARL3: Beam-Line: 4 Piece Shield for 5P150 BACK/FRONT/SIDES
ARL3-3B-L-HSS-WH	ARL3: Beam-Line: 4 Piece Shield for 5P150 BACK/FRONT/SIDES
ARL3-3B-L-HSS-GRY	ARL3: Beam-Line: 4 Piece Shield for 5P150 BACK/FRONT/SIDES
ARL3-3B-XL-HSS-BZ	ARL3: Beam-Line: 4 Piece Shield for 5P300 BACK/FRONT/SIDES
ARL3-3B-XL-HSS-BL	ARL3: Beam-Line: 4 Piece Shield for 5P300 BACK/FRONT/SIDES
ARL3-3B-XL-HSS-WH	ARL3: Beam-Line: 4 Piece Shield for 5P300 BACK/FRONT/SIDES
ARL3-3B-XL-HSS-GRY	ARL3: Beam-Line: 4 Piece Shield for 5P300 BACK/FRONT/SIDES
ARL3-3B-XXL-HSS-BZ	ARL3: Beam-Line: 4 Piece Shield for 5P450 BACK/FRONT/SIDES
ARL3-3B-XXL-HSS-BL	ARL3: Beam-Line: 4 Piece Shield for 5P450 BACK/FRONT/SIDES
ARL3-3B-XXL-HSS-WH	ARL3: Beam-Line: 4 Piece Shield for 5P450 BACK/FRONT/SIDES
ARL3-3B-XXL-HSS-GRY	ARL3: Beam-Line: 4 Piece Shield for 5P450 BACK/FRONT/SIDES

Large Area Light: Optic-Line - 3-CCT, 5-Power

- Easy Beam swap: Type III Beams installed, Type II, III, IV, V included in box



Box Qty.
5P150- 4
5P300- 2



Model	Voltage	Watts	CCT
LED-ARL3-OPT-5P150-TRI-BZ-HV	277-480V	150/125/100/75/50w	30/40/50k
LED-ARL3-OPT-5P150-TRI-BL-UNV	120-277V	150/125/100/75/50w	30/40/50k
LED-ARL3-OPT-5P150-TRI-BL-HV	277-480V	150/125/100/75/50w	30/40/50k
LED-ARL3-OPT-5P150-TRI-WH-UNV	120-277V	150/125/100/75/50w	30/40/50k
LED-ARL3-OPT-5P150-TRI-WH-HV	277-480V	150/125/100/75/50w	30/40/50k
LED-ARL3-OPT-5P300-TRI-BZ-UNV	120-277V	300/270/240/210/180w	30/40/50k
LED-ARL3-OPT-5P300-TRI-BL-UNV	120-277V	300/270/240/210/180w	30/40/50k
LED-ARL3-OPT-5P300-TRI-BL-HV	277-480V	300/270/240/210/180w	30/40/50k
LED-ARL3-OPT-5P300-TRI-WH-UNV	120-277V	300/270/240/210/180w	30/40/50k
LED-ARL3-OPT-5P300-TRI-WH-HV	277-480V	300/270/240/210/180w	30/40/50k
LED-ARL3-OPT-5P450-TRI-BZ-UNV	120-277V	450/420/390/360/330w	30/40/50k
LED-ARL3-OPT-5P450-TRI-BL-UNV	120-277V	450/420/390/360/330w	30/40/50k
LED-ARL3-OPT-5P450-TRI-WH-UNV	120-277V	450/420/390/360/330w	30/40/50k



5P150		5P300	
WATT	LUMENS	WATT	LUMENS
50	7,500	180	27,000
75	11,250	210	31,500
100	15,000	240	36,000
125	18,750	270	40,500
150	22,500	300	45,000

5P450	
WATT	LUMENS
330	49,500
360	54,000
390	58,500
420	63,000
450	67,500

Shields

Accessory Model	Description
ARL3-OPT-L-HSS-BZ	ARL3: Beam-line: House side shield for 5P150
ARL3-OPT-L-HSS-BL	ARL3: Beam-line: House side shield for 5P150
ARL3-OPT-L-HSS-WH	ARL3: Beam-line: House side shield for 5P150
ARL3-OPT-XL-HSS-BZ	ARL3: Beam-line: House side shield for 5P300
ARL3-OPT-XL-HSS-BL	ARL3: Beam-line: House side shield for 5P300
ARL3-OPT-XL-HSS-WH	ARL3: Beam-line: House side shield for 5P300


Factory Install Options	Description
Add 'EMB' to model #	Emergency backup (external 40W/field install)
Add '-PC' to model #	Photocell
Add: 20KV to model#	Add: 20KV to model#



Toolless Access to Beam Lens



Toolless Access to Driver

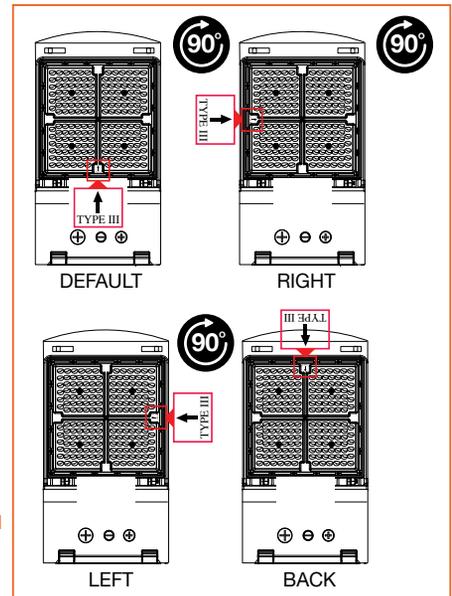

Rotatable Beam Lens

Field rotation eases lighting design implementation. Rotate lens and receive different light distribution in different directions.No change to fixture installation and EPA.




-BZ

WATT	LUMENS	WATT	LUMENS
20	2,800	200	28,000
40	5,600	215	30,100
60	8,400	225	31,500
70	10,150	240	33,600
90	12,600	250	35,000
100	14,000	275	38,500
110	15,400	300	42,000
130	18,200	330	46,200
140	19,600	360	50,400
150	21,000	390	54,600
165	23,100	420	58,800
190	26,600	450	63,000



House Side Shield



ARL3-3P150-3B-1-2-3
ARL3-3P300-3B-1-2-3
ARL3-3P450-3B-1-2-3



S-TWC-MW-1
S-TWC-MW-BT
TWC-DL



S-TWC-PIR-1
S-TWC-PIR-BT



S-LINE-R

Large Area Light: Bolt-Line - 3-CCT, 5-Power

Box Qty. 1

Model	Voltage	Watts	CCT
LED-ARL3-5P100-TRI-BZ-UNV	120-277V	100/80/60/40/20w	30/40/50k
LED-ARL3-5P150-TRI-BZ-UNV	120-277V	150/130/110/90/80w	30/40/50k
LED-ARL3-5P150-TRI-BZ-HV	277-480V	150/130/110/90/80w	30/40/50k
LED-ARL3-5P240-TRI-BZ-UNV	120-277V	150/130/110/90/80w	30/40/50k
LED-ARL3-5P300-TRI-BZ-UNV	120-277V	300/275/250/225/200w	30/40/50k
LED-ARL3-5P300-TRI-BZ-HV	277-480V	300/275/250/225/200w	30/40/50k
LED-ARL3-5P450-TRI-BZ-UNV	120-277V	450/420/390/360/330w	30/40/50k
LED-ARL3-5P450-TRI-BZ-HV	277-480V	450/420/390/360/330w	30/40/50k



*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

Accessory Model	Description
ARL3-100-150W-HSS-BZ	ARL3: House side shield for 100W and 150W
ARL3-240-300W-HSS-BZ	ARL3: House side shield for 240W and 300W
ARL3-450W-HSS-BZ	ARL3: House side shield for 450W

Accessory Model	Description
ARL3-T-II-100-150	ARL: Type II Beams lens (25° beam) lens
ARL3-T-IV-100-150	ARL2: Type IV Beams lens (60/90° beam) lens
ARL3-T-V-100-150	ARL2: Type V Beams lens (360° beam) lens
ARL3-T-II-240-300	ARL: Type II Beams lens (25° beam) lens
ARL3-T-IV-240-300	ARL2: Type IV Beams lens (60/90° beam) lens
ARL3-T-V-240-300	ARL2: Type V Beams lens (360° beam) lens
ARL3-T-II-450	ARL: Type II Beams lens (25° beam) lens
ARL3-T-IV-450	ARL2: Type IV Beams lens (60/90° beam) lens
ARL3-T-V-450	ARL2: Type V Beams lens (360° beam) lens

Accessory Model	Description
Add '-EMB' to model #	Emergency backup (external 40W/field install)
Add '-PC' to model #	Photocell
Add: 20KV to model#	Add: 20KV to model#

Shields

Accessory Model	Description
ARL3-3B-L-HSS-BZ	ARL3: Beam-Line: House Side Shield for 5P150
ARL3-3B-L-HSS-BL	ARL3: Beam-Line: House Side Shield for 5P150
ARL3-3B-L-HSS-WH	ARL3: Beam-Line: House Side Shield for 5P150
ARL3-3B-L-HSS-GRY	ARL3: Beam-Line: House Side Shield for 5P150
ARL3-3B-XL-HSS-BZ	ARL3: Beam-Line: House Side Shield for 5P300
ARL3-3B-XL-HSS-BL	ARL3: Beam-Line: House Side Shield for 5P300
ARL3-3B-XL-HSS-WH	ARL3: Beam-Line: House Side Shield for 5P300
ARL3-3B-XL-HSS-GRY	ARL3: Beam-Line: House Side Shield for 5P300
ARL3-3B-XXL-HSS-BZ	ARL3: Beam-Line: 4 Piece Shield for 5P450 Back/Front/Sides
ARL3-3B-XXL-HSS-BL	ARL3: Beam-Line: 4 Piece Shield for 5P450 Back/Front/Sides
ARL3-3B-XXL-HSS-WH	ARL3: Beam-Line: 4 Piece Shield for 5P450 Back/Front/Sides
ARL3-3B-XXL-HSS-GRY	ARL3: Beam-Line: 4 Piece Shield for 5P450 Back/Front/Sides



Slip Fitter

Straight Arm Adjustable



Wall Mount

Trunnion



Yoke



Slip Fitter & Straight Arm



House Side Shield



S-TWC-MW-1
TWC-DL



S-TWC-PIR-1
S-TWC-PIR-BT



S-LINE-R

Brackets for ARL3 Fixtures

Accessory Model	Description
ARL3-SF	ARL3: Slip fitter
ARL3-SF-BL	ARL3: Slip fitter (black)
ARL3-SF-WH	ARL3: Slip fitter (white)
ARL3-SF-GRY	ARL3: Slip fitter (gray)
ARL3-SA	ARL3: Straight arm
ARL3-SA-BL	ARL3: Straight arm (black)
ARL3-SA-WH	ARL3: Straight arm (white)
ARL3-SA-GRY	ARL3: Straight arm (gray)
ARL3-WM	ARL3: Wall mount bracket (requires ARL3-SA for mounting)
ARL3-WM-BL	ARL3: Wall mount bracket (requires ARL3-SA for mounting) (black)
ARL3-WM-WH	ARL3: Wall mount bracket (requires ARL3-SA for mounting) (white)
ARL3-WM-GRY	ARL3: Wall mount bracket (requires ARL3-SA for mounting) (gray)
ARL3-SFA	ARL3: Slip fitter/straight arm combo
ARL3-SFA-BL	ARL3: Slip fitter/straight arm combo (black)
ARL3-SFA-WH	ARL3: Slip fitter/straight arm combo (white)
ARL3-SFA-GRY	ARL3: Slip fitter/straight arm combo (gray)
ARL3-ARC-TR	ARL3 Arc: Trunnion (only works with arc)
ARL3-ARC-TR-BL	ARL3 Arc: Trunnion (only works with arc) (black)
ARL3-ARC-TR-WH	ARL3 Arc: Trunnion (only works with arc) (white)
ARL3-TR	ARL3: Trunnion (only works with bolt & Beam-line)
ARL3-TR-BL	ARL3: Trunnion (only works with bolt & Beam-line) (black)
ARL3-TR-WH	ARL3: Trunnion (only works with bolt & Beam-line) (white)
ARL3-TR-GRY	ARL3: Trunnion (only works with bolt & Beam-line) (gray)
ARL3-YK-100-150	ARL3: Yoke
ARL3-YK-240-450	ARL3: Yoke

Sensors for ARL3 Fixtures

Accessory Model	Description
S-TWC-MW-1	"Twist-C microwave sensor Brightness: 100%/ hold time: 10 min. Bi-level dim: 50% stand by time: 10 min. Sensitivity: 100% daylight: Enabled"
S-TWC-PIR-1	"Twist-C PIR sensor Brightness: 100%/ hold time: 10 min. Bi-level dim: 50% stand by time: 10 min. Sensitivity: 100% daylight: Enabled"
S-TWC-PIR-ON/OFF	PIR On/Off Only: Twist-C 5/10/15 Min
TWC-DL	Twist-C daylight sensor: Dusk to dawn, works like a photocell
S-TWC-PIR-BT	PIR Bi-Level + Daylight: Twist-C Bluetooth EnVisionLS App
S-TWC-PIR-SL	PIR Bi-Level + Daylight: Twist-C SILVAIR Enabled





Large Area Light Gen 2

Box Qty. 1

3CCT

Model	Voltage	Watts	Lumens	CCT
LED-ARL2-3P100W-TRI-BZ-TR-UNV	120-277V	100/80/60w	145 lm/w	30/40/50k
LED-ARL2-3P100W-TRI-BZ-YK-UNV	120-277V	100/80/60w	145 lm/w	30/40/50k
LED-ARL2-3P240W-TRI-BZ-YK-UNV	120-277V	240/210/180w	145 lm/w	30/40/50k
LED-ARL2-3P150W-TRI-BZ-SFA-HV	277-480V	150/135/120w	145 lm/w	30/40/50k
LED-ARL2-150W-50K-BZ-SF-UNV	120-277V	150w	145 lm/w	5000k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.



3" Cylinder: M-Line - 3-CCT w/ Photocell

Box Qty. 6

3CCT

Model	Voltage	Watts	CCT
LED-CYE-UD-3-3P30-TRI-BZ-PC	120-277V	30/20/10W	30/40/50k
LED-CYE-UD-3-3P30-TRI-BL-PC	120-277V	30/20/10W	30/40/50k
LED-CYE-UD-3-3P30-TRI-WH-PC	120-277V	30/20/10W	30/40/50k

WATT	LUMENS
10	1,200
20	2,400
30	3,600



4" & 6" Cylinder: ARCY - 3-CCT, 3-Power w/ Photocell

Box Qty. 3P20- 6 3P35- 4

3CCT

Model	Voltage	Watts	CCT
LED-CYA-UD-4-3P20-TRI-BZ-PC	120-277V	20/16/12W	30/40/50k
LED-CYA-UD-4-3P20-TRI-BL-PC	120-277V	20/16/12W	30/40/50k
LED-CYA-UD-4-3P20-TRI-WH-PC	120-277V	20/16/12W	30/40/50k
LED-CYA-UD-6-3P35-TRI-BZ-PC	120-277V	35/29/22W	30/40/50k
LED-CYA-UD-6-3P35-TRI-BL-PC	120-277V	35/29/22W	30/40/50k
LED-CYA-UD-6-3P35-TRI-WH-PC	120-277V	35/29/22W	30/40/50k

Accessory Model	Description
Add: -15D to Model #	Factory installed 15D Beam
Add: -60D to Model #	Factory installed 60D Beam
CYA-UD-4-Beam-15	Cylinder: ARCY-Line Beam (field install)
CYA-UD-6-Beam-15	Cylinder: ARCY-Line Beam (field install)
CYA-UD-4-Beam-60	Cylinder: ARCY-Line Beam (field install)
CYA-UD-6-Beam-60	Cylinder: ARCY-Line Beam (field install)

WATT	LUMENS	WATT	LUMENS
12	1,250	22	2,200
16	1,600	29	2,750
20	2,000	35	3,100




Light Direction Selectable



3-Power Selectable



Selectable Photocell



3-CCT Selectable

Security Light w/ Sensor - 3-CCT, 3-Power

UL ENEC Box Qty. 12




Model	Voltage	Watts	CCT
LED-XSL2R-2P25-TRI-BZ-PIR	120V	25/16w	30/40/50k
LED-XSL2R-2P25-TRI-BL-PIR	120V	25/16w	30/40/50k
LED-XSL2R-2P25-TRI-WH-PIR	120V	25/16w	30/40/50k

WATT	LUMENS
16	2,080
25	3,250

Adjustable Brightness Sensor Photocell



Adjustable Hold Time Motion Sensor 3-CCT Selectable

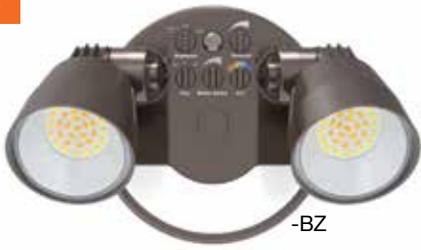

-BZ



-BL



-WH




Modern Sconce: M-Line - 5-CCT
5" x 5"

Box Qty. 10

Model	Voltage	Watts	Lumens	CCT
LED-WSC-UD-15W-5CCT-WH	120-277V	15W	1,000	27/30/35/40/50k
LED-WSC-UD-15W-5CCT-BL	120-277V	15W	1,000	27/30/35/40/50k

5CCT

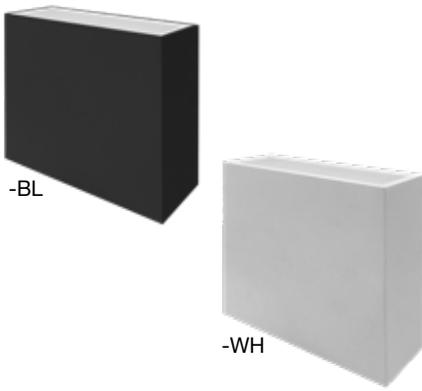

5" x 10"

Box Qty. 10

Model	Voltage	Watts	Lumens	CCT
LED-WSC-5X10-UD-24W-5CCT-WH	120-277V	24W	2,400	27/30/35/40/50k
LED-WSC-5X10-UD-24W-5CCT-BL	120-277V	24W	2,400	27/30/35/40/50k

5CCT


-WH

12" x 12"

Box Qty. 10



Model	Voltage	Watts	Lumens	CCT
LED-WSC-12-UD-30W-5CCT-WH	120-277V	30w	2,700	27/30/35/40/50k
LED-WSC-12-UD-30W-5CCT-BL	120-277V	30w	2,700	27/30/35/40/50k

5CCT

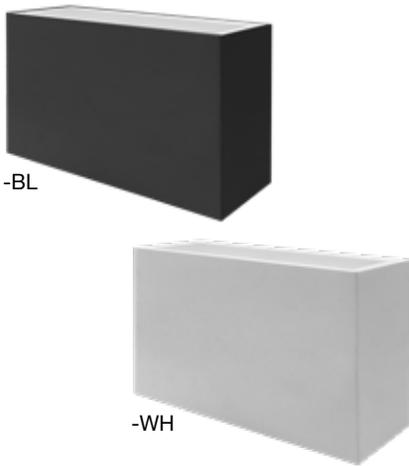

-BL

-WH



3 SELECTABLE LIGHT OPTIONS

- Up Only
- Up & Down Light
- Down Only
- 5-CCT Selectable



Indoor Use




Outdoor Use

Tenon Mount For Poles


- Compatible with 2 3/8" slip fitter brackets
- Stocked in bronze finish.

Custom color powder coat available.


Box Qty: 4

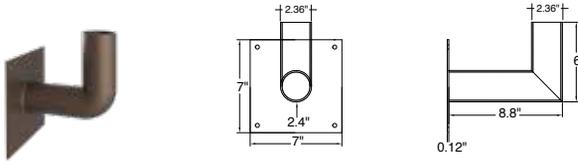


Accessory Model	Description
TN-WM-90-7	Tenon: Wall mount 90 degree arm 7" mounting bracket bronze finish

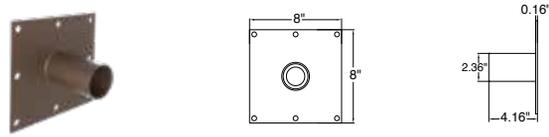


Accessory Model	Description
TN-WM-7	Tenon: Wall mount straight 4" mounting bracket bronze finish

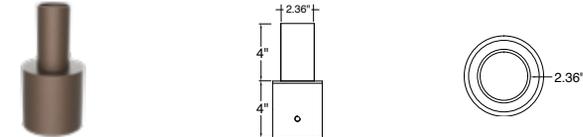


Accessory Model	Description
TN-RD-3	Tenon: Round 3" pole reducer to 2.36"

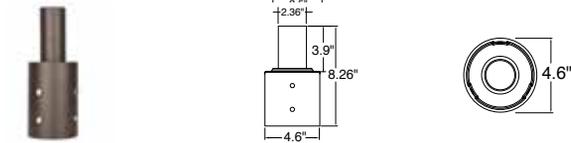


Accessory Model	Description
TN-RD-4	Tenon: Round 4" pole reducer to 2.36"

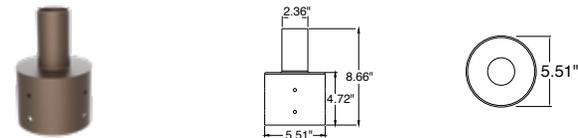


Accessory Model	Description
TN-RD-5	Tenon: Round 5" pole reducer to 2.36"

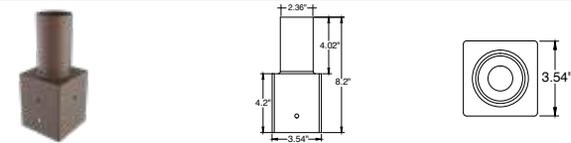


Accessory Model	Description
TN-SQ-3	Tenon: Square 3" pole reducer to 2.36"

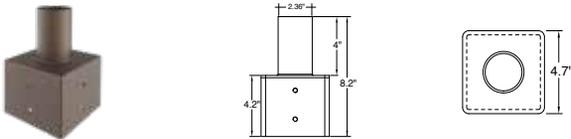


Accessory Model	Description
TN-SQ-4	Tenon: Square 4" pole reducer to 2.36"

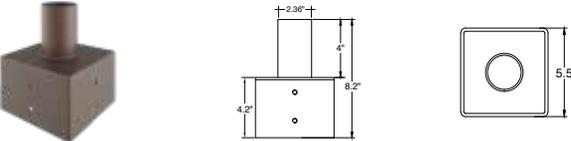


Accessory Model	Description
TN-SQ-5	Tenon: Square 5" pole reducer to 2.36"

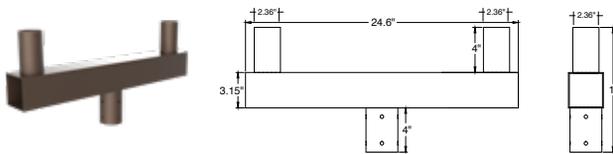


Accessory Model	Description
TN-BH-SQ-180-2S	Tenon: Square bullhorn 2-head adapter

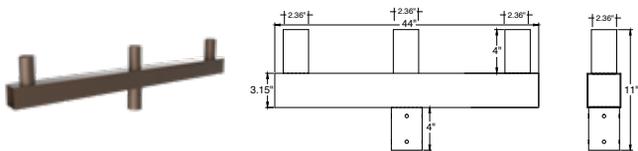

Accessory Model	Description
TN-BH-SQ-180-3S	Tenon: Square bullhorn 3-head adapter

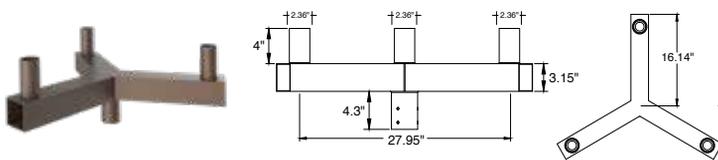

Accessory Model	Description
TN-BH-SQ-180-3Y	Tenon: Square bullhorn 3-head Y-adapter

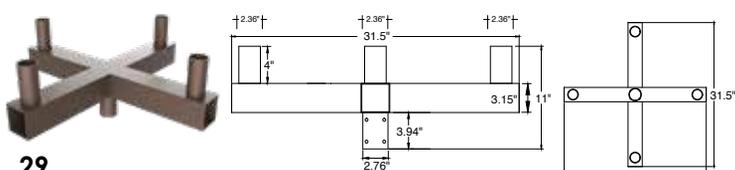

Accessory Model	Description
TN-BH-SQ-90-4X	Tenon: Square bullhorn 4-head X-adapter

Post Top Fixture: Bolt-Line - 3-CCT, 3-Power

Box Qty. 1



-BZ



-BL

Model	Voltage	Watts	CCT
LED-PST-3P75-TRI-BZ-UNV	120-277V	75/50/35w	30/40/50k
LED-PST-3P75-TRI-BL-UNV	120-277V	75/50/35w	30/40/50k
LED-PST-3P150-TRI-BZ-UNV	120-277V	150/125/100w	30/40/50k
LED-PST-3P150-TRI-BL-UNV	120-277V	150/125/100w	30/40/50k

Factory Install Options	Description
Add '-EMB' to model #	Emergency backup (internal 15W)
Add '-BMS' to model #	Bi-level motion + daylight sensor
Add '-HV' to model #	High voltage (internal 480V)
Add: 20KV to model#	SG-20KV-UNV: 20KV surge protector

WATT	LUMENS
35	4,700
50	7,400
75	10,200
100	13,900
125	17,400
150	20,400

Accessory Model	Description
PC-TWL-UNV	JL207C 3PIN Locking Type Thermal Photo Control 120-277V Intermatic
PC-TWL-RC	Twist Lock photocell receptacle
PC-SHORT-CAP	3 Pin Shorting Cap



PC-TWL-UNV



PC-TWL-RC



PC-SHORT-CAP





-BZ



-WH

Bullet Flood Light: S - 3-CCT


Box Qty. 12



Model	Voltage	Watts	Lumens	CCT
LED-BLT-25W-TRI-BZ-KN-UNV	120-277V	25w	3,500	30/40/50k
LED-BLT-25W-TRI-WH-KN-UNV	120-277V	25w	3,500	30/40/50k



180° Tilt Angle

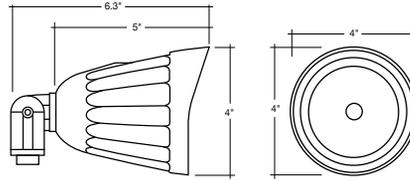

1/2" Knuckle Mount


Bullet Flood Lights: Magna - 3-CCT, 5-Power w/ Photocell

Box Qty. 12



Model	Voltage	Watts	CCT
LED-BLT-3P25W-TRI-BZ-KN-UNV	120-277V	25/20/15w	30/40/50k
LED-BLT-3P25W-TRI-WH-KN-UNV	120-277V	25/20/15w	30/40/50k
LED-BLT-3P25W-TRI-BZ-TR-UNV	120-277V	25/20/15w	30/40/50k

WATT	LUMENS
15	1,875
20	2,500
25	3,125



1/2" Knuckle Mount



-BZ



-WH




CCT & Wattage Selectable

Bullet Flood Lights: M

Box Qty. 12

Model	Voltage	Watts	Lumens	CCT
LED-BLT-28W-30K-BZ-KN-UNV	120-277V	28w	3,500	3000k
LED-BLT-42W-30K-BZ-KN-UNV	120-277V	42w	5,250	3000k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

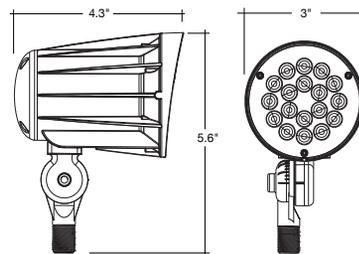

1/2" Knuckle Mount

Final Production





-SLV



-BZ



J-Box Installation Cover
Available in Silver and Bronze

Barn Light: Bolt - 3-CCT w/ Photocell

Box Qty. 2

Model	Voltage	Watts	Lumens	CCT
LED-BDD-40W-TRI-BZ-PC	120-277V	40w	6,200	30/40/50k
LED-BDD-60W-TRI-SL-PC	120-277V	60w	9,300	30/40/50k
LED-BDD-60W-TRI-BZ-PC	120-277V	60w	9,300	30/40/50k



Accessory Model	Description
BDD-JBX-SLV	Silver J-box installation cover
BDD-JBX-BZ	Bronze J-box installation cover
TN-L-POLE	Pole installation tenon bracket

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.



Gooseneck Area Light: Bolt - 3-CCT

Box Qty. 2

Model	Voltage	Watts	CCT
LED-GNB-3P50-TRI-BZ-PC	120-277V	50/40/30w	30/40/50k
LED-GNB-3P50-TRI-BL-PC	120-277V	50/40/30w	30/40/50k
LED-GNB-3P50-TRI-WH-PC	120-277V	50/40/30w	30/40/50k



-BZ



-BL



-WH

WATT	LUMENS
30	3,900
40	5,200
50	6,500





Sports Light Fixture: Magna

- All fixtures includes a yoke mount
- Slip fitter can be added to the fixture (20-30 min. field install)
- Shield is included with the fixture
- Fixture is stocked in black finish
- Free lighting layouts are available
- Product can be customized but with a longer lead time
- Perfect for stadiums and outdoor fields

Round

- LED driver can be remote mounted away from fixture for easy maintenance
- 0-10V dimmable



WATT	LUMENS	WATT	LUMENS
300	52,500	800	124,000
450	63,000	1000	130,000
600	105,000	1200	168,000



Adjustable up/down yoke bracket

Model	Voltage	Watts	CCT
LED-SPL-3P600XS-50K-YK-UNV-BLK	120-277V	600/450/300w	5000k
LED-SPL-3P1200W-50K-YK-UNV-BLK	120-277V	1,200/1,000/800w	5000k
LED-SPL-3P1500XS-50K-YK-UNV-BLK	120-277V	1,500/1,200/900w	5000k

WATT	LUMENS
900	126,000
1200	168,000
1500	210,000

Round RGB

- Compatible with DMX controller (required)

Model	Voltage	Watts	Lumens	CCT
LED-SPL-500W-RGB-YK-BLK	120-277V	500w	See Chart	RGB

RGB	WATTS	LUMENS
Red/Green/Blue	500	26,600
R	175	3,400
G	175	22,400
B	175	1,866

*RGB model custom order only

Accessory Model	Description
SPL-3P600-30D	SPL 3P600: 30D Beam lens
SPL-3P600-60D	SPL 3P600: 30D Beam lens
SPL-480V-D	480V added for SPL fixture (600w requires 1. 1200w requires 2)
SPL-EC-35FT	35FT Extension cord for remote mount driver



Remote Mountable Driver up to 70ft.




Square Sports Light: Arcy



Model	Voltage	Watts	CCT
LED-SQSPL-3P800W-50K-YK-UNV-BLK	120-277V	800/600/400w	5000k

WATT	LUMENS
400	60,000
600	90,000
800	120,000

Accessory Model	Description
SQSPL-AG	SQSPL: Anti-glare louver shield
SQSPL-20D	SQSPL: 20D Beam lens
SQSPL-55D	SQSPL: 55D Beam lens



Anti-Glare Shield

Accessory Model	Description
SPL-SF	Slip fitter for sports light fixture
SPL-SF-XS	Slip Fitter for SPL-3P600
SPL-SF-XL	Slip Fitter for SPL-3P600
SPL-LSR	Laser aiming device



SPL-SF

Slip Fitter

Accessory Model	Description
Add: -PC to Model #	On/off photocell
Add: 20KV to model#	SG-20KV-UNV: 20KV surge protector
Add: -HV to model#	480V added for SPL fixture (600w/800w requires 1. 1200w requires 2)



Laser

ROUND



WATT	LUMENS
12	1,560
16	2,080
22	2,860

Round Bollard Base: Bolt - 3-CCT / Order Your Base

Box Qty. 1

Model	Height	Finish
BLD-3P22-RD-UNV-BZ-22	22"	Bronze
BLD-3P22-RD-UNV-BL-22	22"	Black
BLD-3P22-RD-UNV-BZ-44	44"	Bronze
BLD-3P22-RD-UNV-BL-44	44"	Black

DOME



WATT	LUMENS
12	1,560
16	2,080
22	2,860

Round Bollard Head: Bolt-Line - 5-CCT

Order Your Head

Box Qty. 4

Model	Voltage	Watts	CCT
LED-BLD-RD-5CCT-CN-DM-BZ	120-277V	22/16/12W	27/30/35/40/50k
LED-BLD-RD-5CCT-CN-DM-BL	120-277V	22/16/12W	27/30/35/40/50k
LED-BLD-RD-5CCT-LV-DM-BZ	120-277V	22/16/12W	27/30/35/40/50k
LED-BLD-RD-5CCT-LV-DM-BL	120-277V	22/16/12W	27/30/35/40/50k
LED-BLD-RD-5CCT-CN-FL-BZ	120-277V	22/16/12W	27/30/35/40/50k
LED-BLD-RD-5CCT-CN-FL-BL	120-277V	22/16/12W	27/30/35/40/50k
LED-BLD-RD-5CCT-LV-FL-BZ	120-277V	22/16/12W	27/30/35/40/50k
LED-BLD-RD-5CCT-LV-FL-BL	120-277V	22/16/12W	27/30/35/40/50k

Factory Installed Frosted Lens Available: BLD-RD-FRL

Factory Installed Frosted Lens Available: BLD-RD-SHIELD

Square Bollard (Base & Head Included)

Box Qty. 1

WATT	LUMENS
12	1,560
16	2,080
22	2,860

Model	Voltage	Watts	CCT
LED-BLD-3P22-SQ-5CCT-UNV-CN-FL-BZ-44	120-277V	22/16/12W	27/30/35/40/50k
LED-BLD-3P22-SQ-5CCT-UNV-CN-FL-BL-44	120-277V	22/16/12W	27/30/35/40/50k

SQUARE



BL-BLACK

SQUARE FLAT



CONE

ROUND DOME



LOUVER



CONE



FROSTED LENS



CONE LENS LED

ROUND FLAT



LOUVER



CONE



FROSTED LENS



LOUVER LENS LED



*Custom finishes include black, white, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.


Accessory Model	Description
BLD-RD-FRL	Frosted lens for round heads. Must be factory installed.
BLD-RD-SHIELD-BZ	Field installed round 180° shield
BLD-RD-SHIELD-BL	Field installed round 180° shield

Accessory Model	Description
Add: -EMB to Model #	90 minute emergency backup
Add: -PC to Model #	On/Off photocell
Add: -BMS to Model #	HD407VC-R: Bi level motion + daylight sensor
Add: 20KV to model#	SG-20KV-UNV: 20KV surge protector
Add: -HV to model#	347-480V Step down transformer

Qube Extendable LED Aquarium Light



- Extendable
- 3 light modes
- 5 levels of brightness
- 3 / 6 / 12 hour timer
- 20,000 lifetime hours
- Waterproof sealant
- Acrylic baffle



Box Qty. 1



3 LIGHT MODES & 5 LEVELS OF BRIGHTNESS



Model	Voltage	Watts	Lumens	CCT	CRI
QB-AQUA-12I-9W-FS	100-240V	9w	650	Red, Blue, 6500K	>80
QB-AQUA-16I-14W-FS	100-240V	14w	850	Red, Blue, 6500K	>80
QB-AQUA-22I-16W-FS	100-240V	16w	920	Red, Blue, 6500K	>80
QB-AQUA-28I-20W-FS	100-240V	20w	1,250	Red, Blue, 6500K	>80
QB-AQUA-36I-25W-FS	100-240V	25w	1,600	Red, Blue, 6500K	>80
QB-AQUA-46I-32W-FS	100-240V	32w	1,800	Red, Blue, 6500K	>80

Qube LED Commercial Growlight

FULL SPECTRUM

- Adjust power for any stage of plant life
- Linkable connector to daisy chain multiple lights included
- 10 foot power cord
- 6 foot suspension kit included
- Energy saving LED technology
- Features 8 LED bars compared to industry standard of 6
- Ideal for cannabis growing use
- 0-10V dimmable to work with grow light control systems

Box Qty. 1

Model	Voltage	Watts	Lumens	CCT
QB-FSG-8B-7T660W	120-277V	660w	1716 μMols / 2.6μMol/J	Full Spectrum
QB-FSG-8B-7T960W	120-277V	960w	2496 μMols / 2.6μMol/J	Full Spectrum

- INPUT: AUTO 120-277V**
- IP65 RATED**
- FULL SPECTRUM LED**
- BUILT-IN POWER CONTROL KNOB**
- 0-10V DIMMABLE FOR CONTROL COMPATIBILITY**



Linear Highbay: Bolt - 3-Power

Box Qty.
2ft- 2
4ft- 1



Model	Voltage	Watts	CCT
LED-LHB-2FT-3P110-F-40K-UNV	120-277V	110/80/60w	4000k
LED-LHB-2FT-3P110-F-50K-UNV	120-277V	110/80/60w	5000k
LED-LHB-2FT-3P165-F-40K-UNV	120-277V	165/150/125w	4000k
LED-LHB-2FT-3P165-F-50K-UNV	120-277V	165/150/125w	5000k
LED-LHB-4FT-3P320-F-50K-UNV-30D	120-277V	320/280/240/200/160w	5000k
LED-LHB-4FT-5P320-CTRI-UNV	120-277V	320/280/240/200/160w	5000k

WATT	LUMENS	WATT	LUMENS
60	8,700	200	29,000
80	11,600	240	34,800
110	15,950	260	37,700
125	18,125	280	40,600
150	21,750	290	42,050
160	23,200	320	46,400
165	23,925		

Linear Highbay: C-Line - 3-CCT, 5-Power

Box Qty.
1ft- 4
2ft- 2



Model	Voltage	Watts	CCT
LED-LHB-1FT-3P165-4CCT-UNV	120-277V	165/110/60w	30/35/40/50k
LED-LHB-1FT-3P165-4CCT-HV	277-480V	165/110/60w	30/35/40/50k
LED-LHB-2FT-3P220-4CCT-UNV	120-277V	220/200/180w	30/35/40/50k
LED-LHB-2FT-3P220-4CCT-HV	277-480V	220/200/180w	30/35/40/50k
LED-LHB-2FT-3P320-4CCT-UNV	120-277V	320/290/260w	30/35/40/50k
LED-LHB-2FT-3P320-4CCT-HV	277-480V	320/290/260w	30/35/40/50k
LED-LHB-2FT-3P440-4CCT-UNV	120-277V	440/410/380w	30/35/40/50k
LED-LHB-2FT-3P440-4CCT-HV	277-480V	440/410/380w	30/35/40/50k

3P165/3P220/3P320				3P440	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
60	9,000	220	31,900	380	57,000
110	16,500	260	39,000	410	61,500
165	24,750	290	43,500	440	66,000
180	27,000	320	48,000		
200	30,000				


Accessory Model	Description
SK-10FT-Y-LC-PD	10' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
SK-20FT-Y-LC-PD	20' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
SK-10FT-Y-LC-CB	10' Y-Shape, Loop Top, Carabiner Bottom (Adjustable Length)
SK-20FT-Y-LC-CB	20' Y-Shape, Loop Top, Carabiner Bottom (Adjustable Length)
CK-6FT-V	6' Chain Hanging Kit

Accessory Model	Description
LHB-3P-PDM	LHB: Pendant mount bracket up to 320W
LHB-3P440-PDM	LHB: Surface mount bracket up to 440W
LHB-3P-SM	LHB: Surface mount bracket up to 320W
LHB-3P440-SM	LHB: Surface mount bracket up to 440W


Accessory Model	Description	Accessory Model	Description
LHB-3P165-1FT-WG	LHB: Wire Guard 1ft 3P165	6'-WHIP-1/2KO	6' Whip
LHB-3P165-2FT-WG	LHB: Wire Guard 2ft 3P165	10'-WHIP-1/2KO	10' Whip
LHB-3P220-2FT-WG	LHB: Wire Guard 2ft 3P220	20'-WHIP-1/2KO	20' Whip
LHB-3P320-2FT-WG	LHB: Wire Guard 2ft 3P320		
LHB-3P440-2FT-WG	LHB: Wire Guard 2ft 3P440		



SK-10FT-Y-LC-PD SK-10FT-Y-LC-CB CK-6FT-V
SK-20FT-Y-LC-PD SK-20FT-Y-LC-CB



LHB-3P-PDM LHB-3P-SM

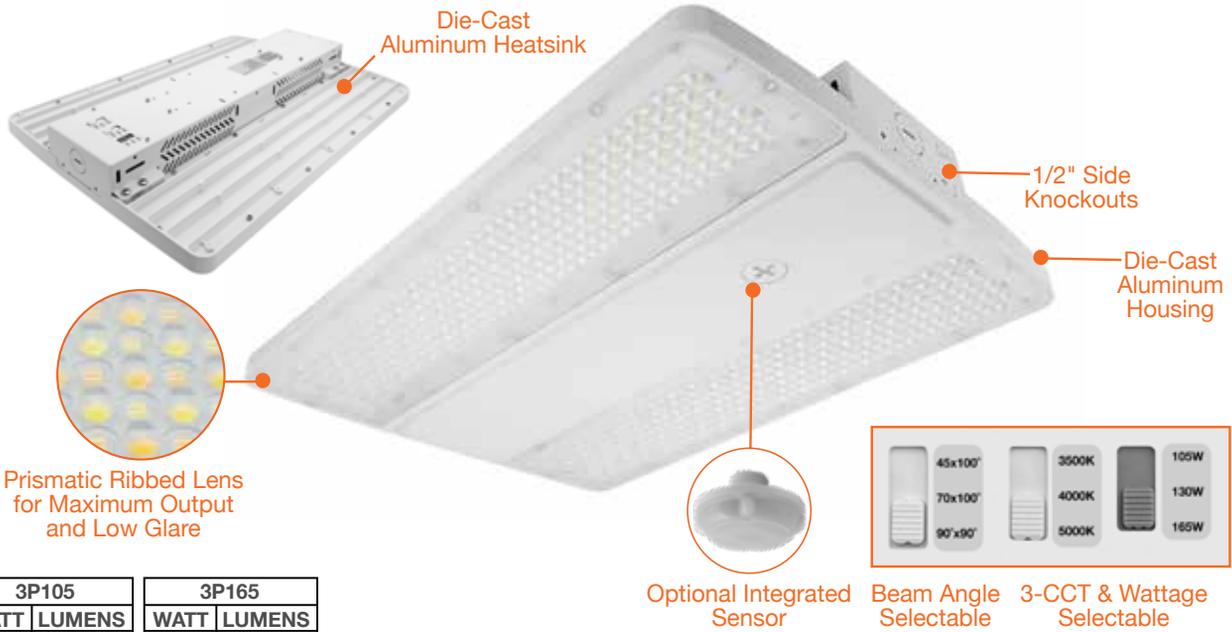

Prismatic Ribbed Lens for Maximum Output and Low Glare

Optional Integrated Sensor



Beam Angle Selectable

3-CCT & Wattage Selectable

3P105		3P165	
WATT	LUMENS	WATT	LUMENS
60	9,000	110	16,500
85	12,750	130	19,500
105	15,750	165	24,750


3P240		3P320	
WATT	LUMENS	WATT	LUMENS
180	27,000	260	39,000
215	32,250	290	43,500
240	36,000	320	48,000

Linear Highbay: Optic-Line - 3-CCT, 3-Power



Box Qty.
3P105- 4
3P165- 2
3P240- 2
3P320- 2

Model	Voltage	Watts	CCT
LED-LHB-OPT-3P105-CTRI-UNV	120-347V	105/85/60w	35/40/50k
LED-LHB-OPT-3P165-CTRI-UNV	120-347V	165/130/110w	35/40/50k
LED-LHB-OPT-3P240-CTRI-UNV	120-347V	240/215/180w	35/40/50k
LED-LHB-OPT-3P320-CTRI-UNV	120-347V	320/290/260w	35/40/50k

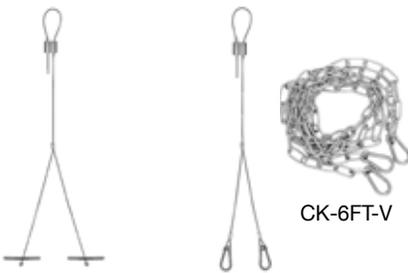

SK-10FT-Y-LC-PD SK-10FT-Y-LC-CB
SK-20FT-Y-LC-PD SK-20FT-Y-LC-CB

Accessory Model	Description
SK-10FT-Y-LC-PD	10' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
SK-20FT-Y-LC-PD	20' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
SK-10FT-Y-LC-CB	10' Y-Shape, Loop Top, Carabiner Bottom (Adjustable Length)
SK-20FT-Y-LC-CB	20' Y-Shape, Loop Top, Carabiner Bottom (Adjustable Length)
CK-6FT-V	6' Chain Hanging Kit



LHB-OPT-PDM LHB-OPT-SM

Accessory Model	Description
LHB-OPT-PDM	LHB: Pendant mount bracket for OPT
LHB-OPT-SM	LHB: Surface mount bracket for OPT



6'-WHIP-1/2KO
10'-WHIP-1/2KO
20'-WHIP-1/2KO

Accessory Model	Description
6'-WHIP-1/2KO	6' Whip
10'-WHIP-1/2KO	10' Whip
20'-WHIP-1/2KO	20' Whip

Accessory Model	Description
SB	5-15P Straight Blade Plug
TL	L5-15P Twist Lock Plug



S-TWC-PIR-ON/OFF
S-TWC-PIR-1
S-TWC-PIR-SL
S-TWC-PIR-BT



S-LINE-R

Accessory Model	Description
3Whip-(3)ft -specify ft in place of #	3 Wire whip hot, neutral, ground (\$15 min)
5Whip-(5)ft -specify ft in place of #	5 Wire whip hot, neutral, ground, dim (\$21min)
Add: -EMB to model #	90 Minute emergency backup
Add: -20KV to model#	SG-20KV-UNV: 20KV surge protector
Add; SB to model #	5-15P Straight Blade Plug
Add; TL to model #	L5-15P Twist Lock Plug



SB



TL

RHBA Highbay Fixture - 3-CCT, 3-Power, 3-Beam, 60/80/110° Selectable, IP69K Washdown, NSF HIGH TEMPERATURE 131°F, Food and High Heat Facilities



3P150



3P240

Model	Voltage	Watts	CCT
LED-RHBA-3P150-CTRI-WH-UNV-10	120-277V	150/120/100w	35/40/50k
LED-RHBA-3P240-CTRI-WH-UNV-10	120-277V	240/200/180w	35/40/50k

3P150		3P240	
WATT	LUMENS	WATT	LUMENS
100	10,020	180	30,060
120	16,700	200	35,070
150	25,050	240	40,080





RHB3C-BL



RHB3C-WH



RHB3C-3P400



RHB3C-3B-BL



RHB3C-3B-WH



ECV-RHB3-BL



ECV-RHB3-WH

Final Production

RHB3 UFO High Bay: C-Line - 3-CCT, 5-Power

Box Qty. 1



Model	Voltage	Watts	CCT
LED-RHB3C-3P150-CTRI-BL-10-UNV	120-277V	150/100/60w	35/40/50k
LED-RHB3C-3P150-CTRI-WH-10-UNV	120-277V	150/100/60w	35/40/50k
LED-RHB3C-3P240-CTRI-BL-10-UNV	120-277V	240/210/180w	35/40/50k
LED-RHB3C-3P240-CTRI-WH-10-UNV	120-277V	240/210/180w	35/40/50k
LED-RHB3C-3P150-CTRI-BL-10-HV	277-480V	150/100/60w	35/40/50k
LED-RHB3C-3P150-CTRI-WH-10-HV	277-480V	150/100/60w	35/40/50k
LED-RHB3C-3P240-CTRI-BL-10-HV	277-480V	240/210/180w	35/40/50k
LED-RHB3C-3P240-CTRI-WH-10-HV	277-480V	240/210/180w	35/40/50k
LED-RHB3C-3P400-CTRI-BL-10-UNV	120-277V	400/350/300w	35/40/50k
LED-RHB3C-3P400-CTRI-BL-10-HV	277-480V	400/350/300w	35/40/50k

LED-RHB3C-3P150		LED-RHB3C-3P240		LED-RHB3C-3P400	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
60	9,000	180	27,000	300	50,400
100	15,000	210	31,500	350	58,800
150	22,250	240	36,000	499	67,000

RHB3C UFO High Bay: C-Line 3-CCT, 3-Power, 3-Beam, 60/80/110° Selectable

Box Qty. 1



Model	Voltage	Watts	Beam	CCT
LED-RHB3C-3B-3P150-TRI-BL-UNV-10	120-277V	150/100/60w	60/80/110°	30/40/50k
LED-RHB3C-3B-3P150-TRI-WH-UNV-10	120-277V	150/100/60w	60/80/110°	30/40/50k
LED-RHB3C-3B-3P240-TRI-BL-UNV-10	120-277V	240/200/180w	60/80/110°	30/40/50k
LED-RHB3C-3B-3P240-TRI-WH-UNV-10	120-277V	240/200/180w	60/80/110°	30/40/50k

LED-RHB3C-3B3P150		LED-RHB3C-3B3P240	
WATT	LUMENS	WATT	LUMENS
60	9,000	180	27,000
100	15,000	200	31,500
150	22,500	240	36,000

RHB3 UFO High Bay: EcoValue - 2-CCT, 3-Power

Box Qty. 1



NEW

Model	Voltage	Watts	CCT
ECV-RHB3-3P150-40/50K-BL-UNV-6	120-277V	150/120/100w	40/50k
ECV-RHB3-3P150-40/50K-WH-UNV-6	120-277V	150/120/100w	40/50k
ECV-RHB3-3P240-40/50K-BL-UNV-6	120-277V	240/200/180w	40/50k
ECV-RHB3-3P240-40/50K-WH-UNV-6	120-277V	240/200/180w	40/50k

ECV-RHB3-3P150		LED-RHB3C-3P240	
WATT	LUMENS	WATT	LUMENS
100	8,400	180	25,200
120	14,000	200	29,400
150	21,000	240	33,600

Single CCT w/ 6' Whip

Box Qty. 1



Model	Voltage	Watts	Lumens	CCT
LED-RHB3-100W-40K-BL-6	120-277V	100w	14,000	4000k
LED-RHB3-100W-50K-BL-6	120-277V	100w	14,000	5000k
LED-RHB3-240W-40K-BL-6	120-277V	240w	33,600	4000k
LED-RHB3-240W-40K-WH-6	120-277V	240w	33,600	4000k



RHB3-100/150-ALM-RF-90
or
RHB3-240-ALM-RF-90



RHB3-100/150-ACR-RF
or
RHB3-240-ACR-RF



RHB3-100/150-ACR-RF
or
RHB3-240-ACR-RF
+
RHB3-UNV-ACR-BC



Acrylic Reflector
Bottom Cover & Sensor



RHB3-100/150-WG
or
RHB3-240-WG



RHB-100/150-SM
RHB-240-SM



SK-10FT-Y-LC-CB
SK-20FT-Y-LC-CB



RHB-PDM-HK



LED-EMB-30W-HV-UFO-BL
LED-EMB-30W-HV-UFO-WH



UFO-TEST-CTR



S-TWC-PIR-1
S-TWC-PIR-SL
S-TWC-PIR-BT



S-TWC-PIR-ON/OFF



S-LINE-R



LED-EMB-30W-480-0/10V

Reflectors

Accessory Model	Description
RHB3-100/150-ALM-RF	90° Aluminum reflector for 100 & 150W
RHB3-240-ALM-RF	90° Aluminum reflector for 240W
RHB3-100/150-ACR-RF	90° Acrylic reflector for 100 & 150W
RHB3-240-ACR-RF	90° Acrylic reflector for 240W

Reflector Bottom Covers

Accessory Model	Description
RHB3-UNV-ACR-BC	Acrylic Bottom Cover 90° (Only acceptable with Acrylic Lens)

Wire Guards

Accessory Model	Description
RHB3-100/150-WG	Wire guard for 100 & 150W
RHB3-240-WG	Wire guard for 240W

Mounting Kits

Accessory Model	Description
RHB-PDM-HK	Pendant Mount Hook 3/4" Pipe
RHB-100/150-SM	100/150w Surface Mount
RHB-240-SM	240w Surface Mount
SK-10FT-Y-LC-CB	Suspension Kit: 10' Y-Shape, Loop Top, Carabiner Bottom (Adjustable Length)
SK-20FT-Y-LC-CB	Suspension Kit: 20' Y-Shape, Loop Top, Carabiner Bottom (Adjustable Length)

Emergency Backup

Accessory Model	Description
LED-EMB-30W-HV-UFO-BL	Emergency Back Up For Internal Drivers- High Voltage 170V Output - Includes Round UFO HighBay EM Kit (Black)
LED-EMB-30W-HV-UFO-WH	Emergency Back Up For Internal Drivers- High Voltage 170V Output - Includes Round UFO HighBay EM Kit (White)
UFO-TEST-CTR	Test Button Controller
LED-EMB-30W-480-0/10V	30W Remote Mounted for 480V

Sensor

Accessory Model	Description
S-TWC-MW-1	"Twist-C microwave sensor • Brightness: 100%/ hold time: 10 min. Bi-level dim: 50% stand by time: 10 min. Sensitivity: 100% daylight: Enabled"
S-TWC-PIR-1	"Twist-C PIR sensor • Brightness: 100%/ hold time: 10 min. Bi-level dim: 50% stand by time: 10 min. • Sensitivity: 100% daylight: Enabled"
S-TWC-PIR-ON/OFF	PIR On/Off Only: Twist-C 5/10/15 Min
TWC-DL	Twist-C daylight sensor: Dusk to dawn, works like a photocell
S-TWC-PIR-BT	PIR Bi-Level + Daylight: Twist-C Bluetooth EnVisionLS App
S-TWC-PIR-SL	PIR Bi-Level + Daylight: Twist-C SILVAIR Enabled





-BZ



-WH



HD03R Controller

WATT	LUMENS
25	3,625
40	5,800
60	8,700

Square Canopy Light: Slim - 3-CCT, 3-Power

Box Qty. 2



Model	Voltage	Watts	CCT
LED-SCP-3P60W-TRI-WH	120-277V	60/40/25W	30/40/50k
LED-SCP-3P60W-TRI-BZ	120-277V	60/40/25W	30/40/50k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

Factory Install Options	Description
Add '-EMB' to model #	Emergency backup (internal 8W)
Add '-BMS' to model #	Bi-level motion + daylight sensor
Add: -BMSPIR to Model #	PIR Bi Level Motion + Daylight Sensor
Add: -BMSBT to Model #	EnvisionLS Bluetooth Control: PIR/Daylight/Zoning
Add: -BMS-SIL to Model #	SILVAIR Enable Bluetooth Control: PIR/Daylight/Zoning/Monitoring



Remote for Sensor	Description
HD03R	Remote for HD sensors
HD05R	Remote for HD sensors w/ screen



-BZ



-WH

3P60		3P90	
WATT	LUMENS	WATT	LUMENS
30	4,200	70	10,150
45	6,300	80	11,600
60	8,400	90	13,050

Square Canopy Light: Arcy - 3-CCT, 3-Power

Box Qty. 2



Model	Voltage	Watts	CCT
LED-SQUC-3P60-TRI-WH	120-277V	60/45/30W	30/40/50k
LED-SQUC-3P60-TRI-BZ	120-277V	60/45/30W	30/40/50k
LED-SQUC-3P90-TRI-WH	120-277V	90/80/70W	30/40/50k
LED-SQUC-3P90-TRI-BZ	120-277V	90/80/70W	30/40/50k

Factory Install Options	Description
Add '-EMB' to model #	Emergency backup (internal 8W)

Accessory Model	Description
S-TWC-PIR-ON/OFF	PIR On/Off Only: Twist-C 5/10/15 Min
S-TWC-PIR-BT	PIR Bi-Level + Daylight: Twist-C Bluetooth EnVisionLS App
S-TWC-PIR-SL	PIR Bi-Level + Daylight: Twist-C SILVAIR Enabled



-WH

150W		3P150	
WATT	LUMENS	WATT	LUMENS
150	18,000	53	8,000
		86	13,000
		150	22,500

Large Square Canopy Light: Slim-Line - 2-CCT

Box Qty. 2




Model	Voltage	Watts	CCT
LED-CP2-WH-150W-40/50K	120-277V	150w	40/50k
LED-CP2-WH-3P150-40/50K	120-277V	150/86/53w	40/50k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

Accessory Model	Description
24x24-GF-CP2	24x24 goof ring

Made to Order 10-15 Days



Goof Ring



-BZ



-WH

Round Canopy Light: Slim - 3-CCT, 5-Power

Box Qty. 2

Model	Voltage	Watts	CCT
LED-RCP-5P55W-TRI-WH	120-277V	55/47/38.5/30/22W	30/40/50k
LED-RCP-5P55W-TRI-BZ	120-277V	55/47/38.5/30/22W	30/40/50k
LED-RCP-5P100W-TRI-WH	120-277V	100/90/80/70/60w	30/40/50k
LED-RCP-5P100W-TRI-BZ	120-277V	100/90/80/70/60w	30/40/50k



*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

Factory Install Options	Description
Add: -EMB to Model #	90 minute emergency backup
Add: 20KV to model#	SG-20KV-UNV: 20KV surge protector
View spec sheet for ordering guide	Paint: Black, white, gray standard. custom RAL available

Accessory Model	Description
S-TWC-MW-1	Microwave Bi-Level + Daylight: Twist-C
S-TWC-PIR-1	PIR Bi-Level + Daylight: Twist-C
S-TWC-PIR-ON/OFF	PIR On/Off Only: Twist-C 5/10/15 Min
S-TWC-PIR-BT	PIR Bi-Level + Daylight: Twist-C Bluetooth EnVisionLS App
S-TWC-PIR-SL	PIR Bi-Level + Daylight: Twist-C SILVAIR Enabled

5P55		5P100	
WATT	LUMENS	WATT	LUMENS
22	3,190	60	8,700
30	4,350	70	10,150
38.5	5,582	80	11,600
47	6,815	90	13,050
55	7,975	100	14,500



S-TWC-PIR-1
S-TWC-PIR-BT
S-TWC-PIR-SL
S-TWC-PIR-ON/OFF



S-TWC-MW-1



S-LINE-R



4" Wide LED Panel: Backlit 6-CCT, 3-Power


Box Qty. 2



Model	Voltage	Watts	CCT
LED-BPL-4ix8ft-3M80-6CCT	120-277V	80/60/40w	27/30/35/40/50/65k
LED-BPL-4ix4ft-3M40-6CCT	120-277V	40/30/20w	27/30/35/40/50/65k
LED-BPL-4ix2ft-3M20-6CCT	120-277V	20/15/10w	27/30/35/40/50/65k


Accessory	Description
4ix2ft-FLNG	4"x2' Flange (Drywall) Kit
4ix4ft-FLNG	4"x4' Flange (Drywall) Kit
4ix8ft-FLNG	4"x8' Flange (Drywall) Kit

4ix8ft		4ix4ft		4ix2ft	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
40	5,000	20	2,500	10	1,250
60	7,000	30	3,500	15	1,750
80	8,800	40	4,400	20	2,200

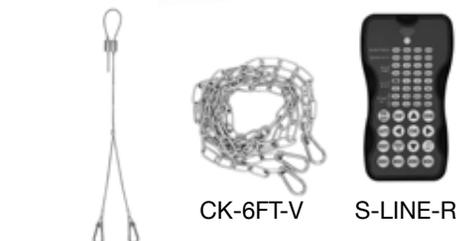

SK-10FT-Y-LC-CB
SK-20FT-Y-LC-CB

4ix2ft-FLNG
4ix4ft-FLNG
4ix8ft-FLNG

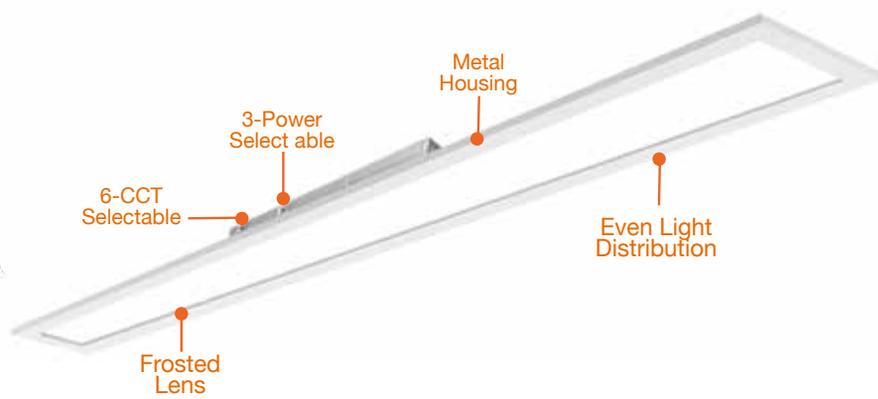

S-AUD-PIR-1
S-AUD-PIR-BT
S-AUD-PIR-SL

BackLit Panels - Sensor Ready - DLC Premium

Box Qty. 2



Model	Voltage	Watts	CCT
LED-BPL-1x4-5P32-5CCT-HL-SR	120-277V	32/27/22/17/12w	30/35/40/50/65k
LED-BPL-2x2-5P32-5CCT-HL-SR	120-277V	32/27/22/17/12w	30/35/40/50/65k
LED-BPL-2x4-5P50-5CCT-HL-SR	120-277V	50/40/30/25/20w	30/35/40/50/65k

Sensor Model	Description
S-AUD-PIR-1	PIR Bi-Level Motion + Daylight Sensor
S-AUD-PIR-BT	EnvisionLS Bluetooth Sensor
S-AUD-PIR-SL	SILVAIR Bluetooth Sensor



Pre-Installed Factory Add-Ons	Description
Add: 20KV to model#	SG-20KV-UNV: 20KV Surge Protector
Add: -HV to model#	347-480V Step Down Transformer
Add '-EMB' to model #	Emergency backup (external 15W)
Add '-BMS' to model #	Bi-level motion + daylight sensor
3Whip-(3)ft - Specify ft in place of #	3 wire whip hot, neutral, ground
5Whip-(5)ft - Specify ft in place of #	5 wire whip hot, neutral, ground, dim

1X4 / 2X2		2X4	
WATT	LUMENS	WATT	LUMENS
12	1,500	20	2,500
17	2,125	25	3,125
22	2,750	30	3,750
27	3,375	40	5,000
32	4,000	50	6,250

Accessory Model	Description
SK-10FT-Y-LC-CB	10' Suspension Kit
SK-20FT-Y-LC-CB	20' Chain Hanging Kit
CK-6FT-V	6' Chain Hanging Kit




3M40		3M50	
WATT	LUMENS	WATT	LUMENS
20	2,200	30	3,750
30	3,300	40	5,000
40	4,400	50	6,250

3M65	
WATT	LUMENS
45	6,250
55	6,875
65	8,125




3M50		3M65	
WATT	LUMENS	WATT	LUMENS
20	2,200	45	6,250
30	3,300	55	6,875
40	4,400	65	8,125

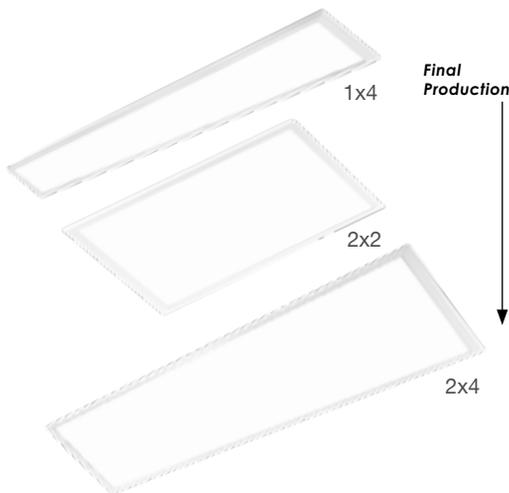

Surface Mount Frame

Flange (Drywall) Kit

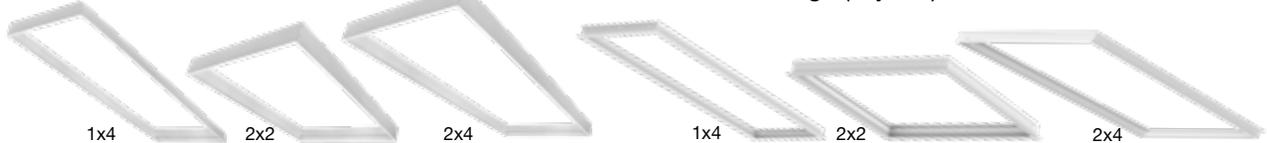

1x4 / 2x2 / 2x4 Panel Accessories

Accessories also work with other 2x2 and 2x2 fixtures (SM only compatible with edge-lit panels)

Model	Description	Model	Description
LED-PNL-2X2-SM	2x2 surface mount kit 2.5" height (for edge lit series only)	LED-PNL-2X2-FLNG	2x2 flange (drywall) kit
LED-PNL-2X4-SM	2x4 surface mount kit 2.5" height (for edge lit series only)	LED-PNL-2X4-FLNG	2x4 flange (drywall) kit
LED-PNL-1X4-SM	1x4 surface mount kit 2.5" height (for edge lit series only)	LED-PNL-1X4-FLNG	1x4 flange (drywall) kit
2X2-SM-3	2x2 surface mount kit 3" height for all panels and troffers	LED-PNL-2X4-SK	Suspension kit for panels
2X4-SM-3	2x4 surface mount kit 3" height for all panels and troffers		
1X4-SM-3	1x4 surface mount kit 3" height for all panels and troffers		

Standard Models

SELECT SWITCH 80 HIGH CRI NSF DLC LISTED Box Qty. 4



Model	Voltage	Watts	CCT
LED-BPL-1x4-3M40-5CCT	120-277V	40/30/20w	30/35/40/50/65k
LED-BPL-1x4-3M40-5CCT-EMB	120-277V	40/30/20w	30/35/40/50/65k
LED-BPL-2x2-3M40-5CCT	120-277V	40/30/20w	30/35/40/50/65k
LED-BPL-2x2-3M40-5CCT-EMB	120-277V	40/30/20w	30/35/40/50/65k
LED-BPL-2x2-3M50-5CCT-HL	120-277V	50/40/30w	30/35/40/50/65k
LED-BPL-2x2-3M50-5CCT-HL-EMB	120-277V	50/40/30w	30/35/40/50/65k
LED-BPL-2x4-3M50-5CCT	120-277V	50/40/30w	30/35/40/50/65k
LED-BPL-2x4-3M50-5CCT-EMB	120-277V	50/40/30w	30/35/40/50/65k
LED-BPL-2x4-3M65-5CCT-HL	120-277V	65/55/45w	30/35/40/50/65k
LED-BPL-2x4-3M65-5CCT-HL-EMB	120-277V	65/55/45w	30/35/40/50/65k

Optional Black Trims

Accessory Model	Description
BPL-2X4-TRIM-BL	2X4 LED panel: Backlit-line black trim
BPL-2X2-TRIM-BL	2X2 LED panel: Backlit-line black trim
BPL-1X4-TRIM-BL	1x4 LED panel: Backlit-line black trim

Single CCT

Model	Voltage	Watts	Lumens	CCT
LED-BPL-1x4-20W-35K-HL	120-277V	20w	2,600	3500k
LED-BPL-1x4-20W-40K-HL	120-277V	20w	2,600	4000k
LED-BPL-1x4-30W-50K-HL	120-277V	30w	3,900	5000k
LED-BPL-2x2-20W-35K-HL	120-277V	20w	2,600	3500k

Factory Install Options	Description
Add '-EMB' to model #	Emergency backup (External 15W)
3Whip-(3)ft - Specify ft in place of #	3 wire whip hot, neutral, ground
5Whip-(5)ft - Specify ft in place of #	5 wire whip hot, neutral, ground, dim

1x4 / 2x2 / 2x4 LED Panel: EdgeLit

Inner Box Qty. 2
Master Box Qty. 4
Must Purchase in
Box Quantity to
Avoid Breakage

Model	Voltage	Watts	Lumens	CCT
LED-PNL-1x4-40W-35K-LF	120-277V	40w	4,600	3500k
LED-PNL-2x2-40W-50K-LF	120-277V	40w	4,600	5000k
LED-PNL-2x2-40W-40K-LF	120-277V	40w	4,600	4000k
LED-PNL-2x4-50W-30K-LF	120-277V	50w	5,750	3000k
LED-PNL-2x4-60W-50K-LF	120-277V	60w	6,900	5000k
LED-PNL-2x4-72W-50K-LF	120-277V	72w	8,280	5000k

Factory Install Options	Description
3Whip-(3)ft - Specify ft in place of #	3 wire whip hot, neutral, ground
5Whip-(5)ft - Specify ft in place of #	5 wire whip hot, neutral, ground, dim
Add '-EMB' to model #	Emergency backup (External 15W)

BackLit Panels - High Power



 Box Qty. 2

NEW

Model	Voltage	Watts	CCT
LED-BPL-2X2-3P215-CTRI-UNV-SR	120-277V	215/170/150w	35/40/50k
LED-BPL-2X4-3P325-CTRI-UNV-SR	120-277V	325/290/260w	35/40/50k

3CCT

2X2-CTRI		2X4-CTRI	
WATT	LUMENS	WATT	LUMENS
150	19,200	260	41,600
170	26,400	290	46,400
215	34,400	325	52,000

Pre-Installed Factory Add-Ons	Description
Add: 20KV to model#	SG-20KV-UNV: 20KV Surge Protector
Add: -HV to model#	347-480V Step Down Transformer
Add '-EMB' to model #	Emergency backup (external 15W)
Add '-BMS' to model #	Bi-level motion + daylight sensor
3Whip-(3)ft - Specify ft in place of #	3 wire whip hot, neutral, ground
5Whip-(5)ft - Specify ft in place of #	5 wire whip hot, neutral, ground, dim

Accessory	Description
SK-10FT-Y-LC-CB	10' Suspension Kit
SK-20FT-Y-LC-CB	20' Chain Hanging Kit
CK-6FT-V	6' Chain Hanging Kit

Accessory Model	Description
S-TWC-MW-1	Microwave Bi-Level + Daylight: Twist-C
S-TWC-PIR-1	PIR Bi-Level + Daylight: Twist-C
S-TWC-PIR-ON/OFF	PIR On/Off Only: Twist-C 5/10/15 Min
S-TWC-PIR-BT	PIR Bi-Level + Daylight: Twist-C Bluetooth EnVisionLS App
S-TWC-PIR-SL	PIR Bi-Level + Daylight: Twist-C SILVAIR Enabled






S-TWC-PIR-BT
S-TWC-PIR-SL
S-TWC-PIR-ON/OFF

S-TWC-MW-1
S-TWC-PIR-1



S-LINE-R

IDEAL FOR HIGH CEILING APPLICATIONS

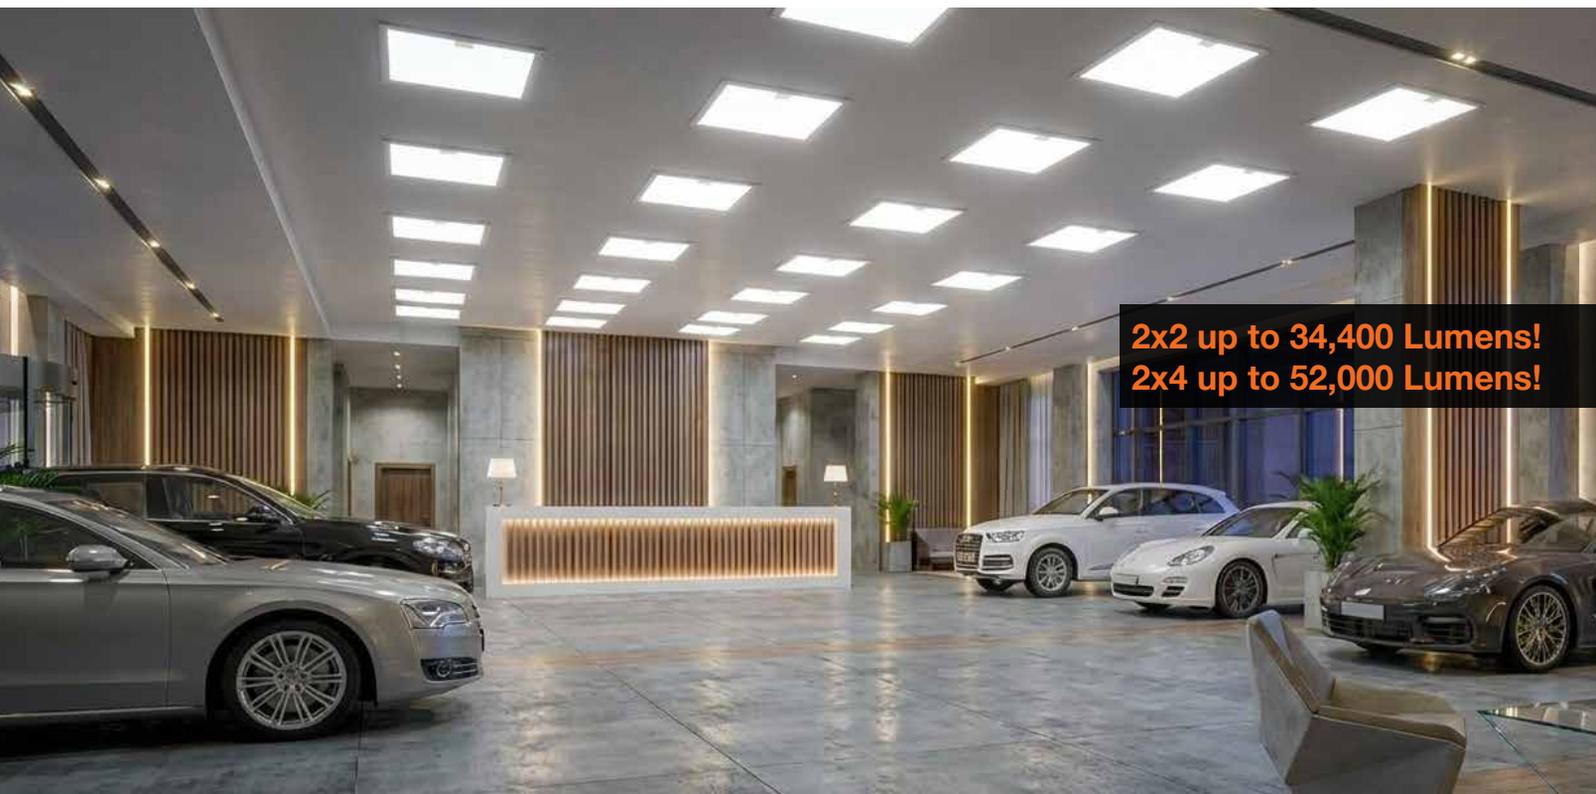

2x2 up to 34,400 Lumens!
2x4 up to 52,000 Lumens!




1x1 / 1x2 LED Surface Mount Panels: Slim - 5-CCT   Box Qty. 4 

Model	Voltage	Watts	Lumens	CCT
LED-PNL-SM-1X1-18W-5CCT	120V	18w	1,500	27/30/35/40/50k
LED-PNL-SM-1X2-22W-5CCT	120V	22w	2,000	27/30/35/40/50k

Accessory Model	Description
LED-EMB-25W-HV-0/10V-2P	Emergency backup (external 25W) field install

**Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.*

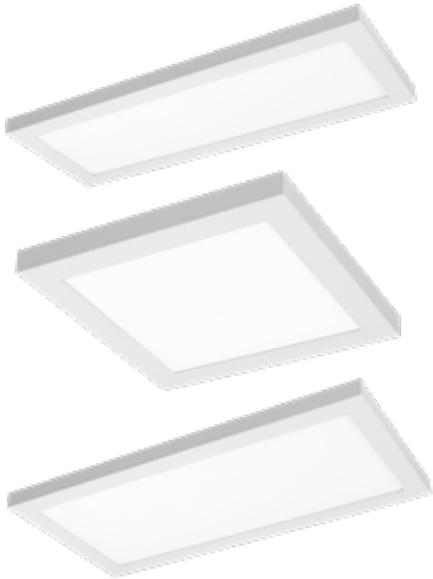

1x4 / 2x2 / 2x4 LED Surface Mount Panels: Slim 5-CCT Select   Box Qty. 4 

Model	Voltage	Watts	CCT
LED-BPL-SM-1X4-3M40-5CCT	120-277V	40/30/20w	27/30/35/40/50k
LED-BPL-SM-2X2-3M40-5CCT	120-277V	40/30/20w	27/30/35/40/50k
LED-BPL-SM-2X4-3M50-5CCT	120-277V	50/40/30w	27/30/35/40/50k


3-CCT Select 

Model	Voltage	Watts	Lumens	CCT
LED-PNL-SM-2X2-40W-TRI	120-277V	40w	4,000	30/40/50k
LED-PNL-SM-2X4-50W-TRI	120-277V	50w	5,000	30/40/50k

Accessory Model	Description
LED-EMB-25W-HV-0/10V-2P	Emergency backup (external 25W) field install

**Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.*

3M40		3M50	
WATT	LUMENS	WATT	LUMENS
20	2,200	30	3,300
30	3,300	40	4,400
40	4,400	50	5,500

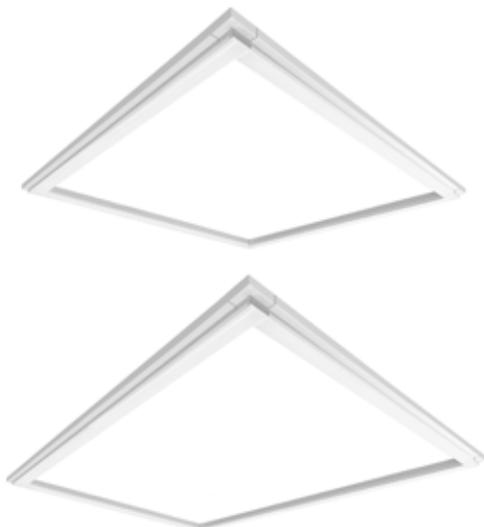

2x2 / 2x4 Frame LED Lights - One Piece - 3-CCT 

Model	Voltage	Watts	CCT
LED-FRM-2X2-3P32-TRI	120-277V	32/24/16w	35/40/50k
LED-FRM-2X4-3P45-TRI	120-277V	45/32/24w	35/40/50k

3P32		3P45	
WATT	LUMENS	WATT	LUMENS
16	2,000	24	3,000
24	3,000	32	4,000
32	4,000	45	5,900





2x2



2x4



S-AUD-PIR-1
S-AUD-PIR-BT
S-AUD-PIR-SL

2x2 / 2x4 LED Troffer: GLIDE - 5-CCT, 3-Power



Box Qty. 4

Model	Voltage	Watts	CCT
LED-CBT-GL-2X2-3P35-5CCT-SR	120-277V	35/30/25w	30/35/40/50/65k
LED-CBT-GL-2X4-3P50-5CCT-SR	120-277V	50/40/30w	30/35/40/50/65k



2x2		2x4	
WATT	LUMENS	WATT	LUMENS
25	2,800	30	3,450
30	3,300	40	4,400
35	4,000	50	5,750

Sensor Options	Description
Add: -EMB to Model #	90 minute emergency backup
Add: -HV to model#	347-480V step down transformer
Add: 20KV to model#	SG-20KV-UNV: 20KV Surge Protector
3Whip-(3)ft - Specify ft in place of #	3 wire whip hot, neutral, ground
5Whip-(5)ft - Specify ft in place of #	5 wire whip hot, neutral, ground, dim

Sensor Options	Description
S-AUD-PIR-1	PIR Bi-Level Motion + Daylight Sensor
S-AUD-PIR-BT	EnvisionLS Bluetooth Sensor
S-AUD-PIR-SL	SILVAIR Bluetooth Sensor



2x2



2x4

2x2 / 2x4 LED Center Basket Thin LuxLume Troffer - 4-CCT, 3-Power



Box Qty. 1
Must Purchase in
Box Quantity to
Avoid Breakage


Model	Voltage	Watts	CCT
LED-CBT-TL-2X2-3P40-4CCT	120-277V	40/35/24w	30/35/40/50k
LED-CBT-TL-2X4-3P50-4CCT	120-277V	50/40/30w	30/35/40/50k



2X2		2X4	
WATT	LUMENS	WATT	LUMENS
20	2,400	30	3,600
30	3,600	40	4,800
40	4,800	50	6,000

Sensor Options	Description
Add: -EMB to Model #	90 minute emergency backup
Add: -BMS to Model #	S-BMS-INT-1: Bi level motion + daylight sensor
Add: -BMS-BT to Model #	S-BMS-INT-1-BT: Bi level motion + daylight sensor w/ bluetooth control (EnvisionLS)
Add: -BMS-SIL to Model #	SILVAIR Enable Bluetooth Control: PIR/Daylight Zoning/Monitoring
Add: -HV to model#	347-480V step down transformer
Add: 20KV to model#	SG-20KV-UNV: 20KV Surge Protector
3Whip-(3)ft - Specify ft in place of #	3 wire whip hot, neutral, ground
5Whip-(5)ft - Specify ft in place of #	5 wire whip hot, neutral, ground, dim



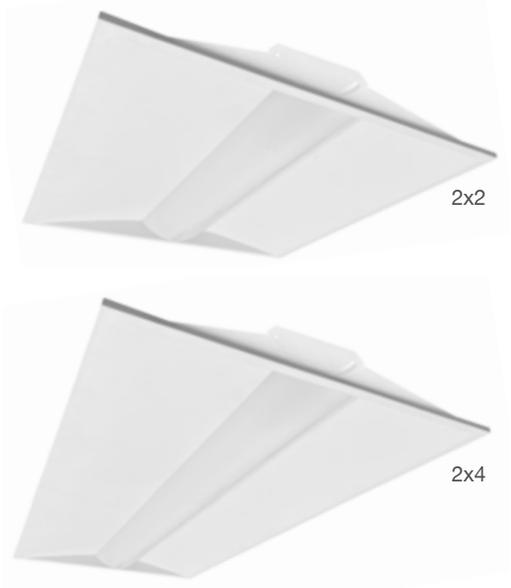

2x2 / 2x4 LED Center Basket Troffer: C - 5-CCT, 5-Power


Box Qty. 2
Must Purchase in Box Quantity to Avoid Breakage



Model	Voltage	Watts	CCT
LED-CBT-2X2-5P40-5CCT	120-277V	40/35/30/25/20w	27/30/35/40/50k
LED-CBT-2X2-5P40-5CCT-EMB	120-277V	40/35/30/25/20w	27/30/35/40/50k
LED-CBT-2X4-5P50-5CCT	120-277V	50/40/30/25/20w	27/30/35/40/50k
LED-CBT-2X4-5P50-5CCT-EMB	120-277V	50/40/30/25/20w	27/30/35/40/50k



5P40		5P50	
WATT	LUMENS	WATT	LUMENS
20	2,500	20	3,750
25	3,125	25	4,375
30	3,750	30	5,000
35	4,375	40	5,625
40	5,000	50	6,250

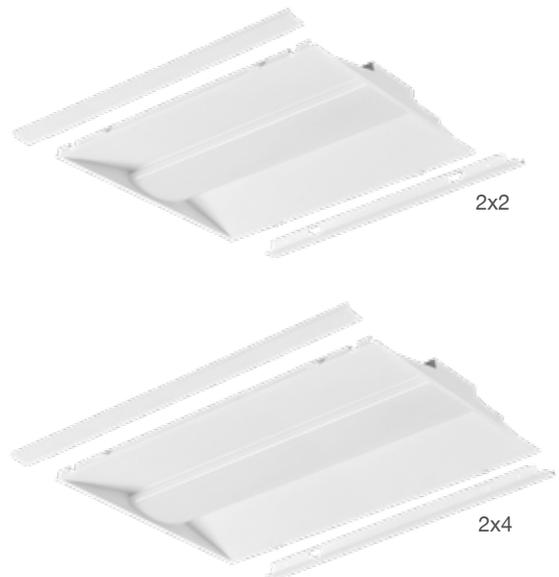

2x2 / 2x4 LED Center Basket Troffer - Retrofit Kit - 5-CCT, 5-Power

Model	Voltage	Watts	CCT
LED-CBT-RK-2X2-5P40-5CCT	120-277V	40/35/30/25/20w	27/30/35/40/50k
LED-CBT-RK-2X2-5P40-5CCT-EMB	120-277V	40/35/30/25/20w	27/30/35/40/50k
LED-CBT-RK-2X4-5P50-5CCT	120-277V	50/40/30/25/20W	27/30/35/40/50k
LED-CBT-RK-2X4-5P50-5CCT-EMB	120-277V	50/40/30/25/20W	27/30/35/40/50k



5P40		5P50	
WATT	LUMENS	WATT	LUMENS
20	2,500	20	3,750
25	3,125	25	4,375
30	3,750	30	5,000
35	4,375	40	5,625
40	5,000	50	6,250




S-LINE-R


Model	Description	Voltage	Watts
S-LINE-R	Remote for S-LINE Series Sensors	12V	<1w

Sensor Options	Description
Add: -EMB to Model #	90 minute emergency backup
Add: -BMS to Model #	S-BMS-INT-1: Bi level motion + daylight sensor
Add: -BMS-BT to Model #	S-BMS-INT-1-BT: Bi level motion + daylight sensor w/ bluetooth control (EnvisionLS App)
Add: -BMS-SIL to Model #	SILVAIR Enable Bluetooth Control: PIR/Daylight Zoning/Monitoring
Add: -HV to model#	347-480V step down transformer
Add: 20KV to model#	SG-20KV-UNV: 20KV Surge Protector
3Whip-(3)ft - Specify ft in place of #	3 wire whip hot, neutral, ground
5Whip-(5)ft - Specify ft in place of #	5 wire whip hot, neutral, ground, dim
Add: -90CRI to model#	CRI90 LED Board (For standard CBT Only)



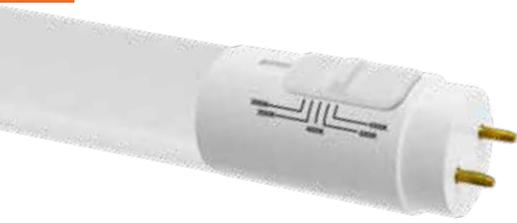

WATT	LUMENS
12	1,560
15	1,950
18	2,300

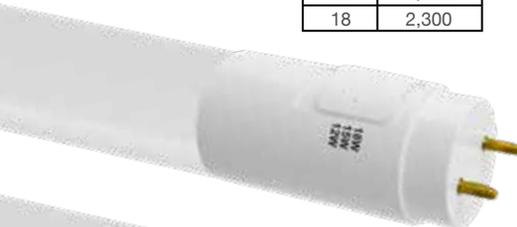

4' T8 Dimmable Bypass Tubes - 5-CCT

- Install tubes without the ballast (single or double sided) any two pins
- Light beam spread replicates the same look as a fluorescent, but with improved light output and efficiency
- PC film protectant for shatter protection (food industry OK)



Box Qty. 30
Must Purchase in
Box Quantity to
Avoid Breakage



Model	Voltage	Watts	CCT
LED-T8-RFD-GL-4FT-3P18-5CCT	120-277V	12/15/18w	30/35/40/50/65k

2' / 3' / 4' T8 Type A+B Tube - 5-CCT

- Install tubes with or without the existing ballast (single or double sided)
- See ballast compatibility chart to ensure compatibility.
- Light beam spread replicates the same look as a fluorescent, but with improved light output and efficiency
- PC film protectant for shatter protection (food industry OK)



Box Qty. 30
Must Purchase in
Box Quantity to
Avoid Breakage



Model	Voltage	Watts	Lumens	CCT
LED-T8-DF-GL-2FT-8W-5CCT	120-277V	8w	1,000	30/35/40/50/65k
LED-T8-DF-GL-3FT-12W-5CCT	120-277V	12w	1,500	30/35/40/50/65k
LED-T8-DF-GL-4FT-15W-5CCT	120-277V	15w	1,950	30/35/40/50/65k
LED-T8-DF-GL-4FT-18W-5CCT	120-277V	18w	2,200	30/35/40/50/65k

Single CCT

Model	Voltage	Watts	Lumens	CCT
LED-T8-DF-GL-2FT-8W-30K	120-277V	8w	1,000	3000k
LED-T8-DF-GL-2FT-8W-35K	120-277V	8w	1,000	3500k
LED-T8-DF-GL-3FT-12W-30K	120-277V	12w	1,500	3000k
LED-T8-DF-GL-3FT-12W-35K	120-277V	12w	1,500	3500k
LED-T8-DF-GL-4FT-15W-35K	120-277V	15w	1,950	3500k
LED-T8-DF-GL-4FT-15W-40K	120-277V	15w	1,950	4000k
LED-T8-DF-GL-4FT-15W-50K	120-277V	15w	1,950	5000k
LED-T8-DF-GL-4FT-18W-30K	120-277V	18w	2,200	3000k
LED-T8-DF-GL-4FT-18W-35K	120-277V	18w	2,200	3500k
LED-T8-DF-GL-4FT-18W-40K	120-277V	18w	2,200	4000k
LED-T8-DF-GL-4FT-18W-50K	120-277V	18w	2,200	5000k
LED-T8-DF-GL-4FT-18W-65K	120-277V	18w	2,200	6500k

Accessory	Description
T8-8FT-4FT-KIT	T8 conversion kit. One 8ft bulb to two 4ft bulbs.



Box Qty. 30

Final
Production


Model	Voltage	Watts	Lumens	CCT
LED-T8-DCGL5-4FT-18W-40K	120-277V	18w	2,550	4000k
LED-T8RW-GLF-4FT-15W-40K	120-277V	15w	1,800	4000k
LED-T8RW-GLF-4FT-15W-50K	120-277V	15w	1,800	5000k



Single Pin Included



R17D Pin Optional



2-Piece Design

8' T8 Type A+B Tube



Box Qty. 15
Must Purchase in
Box Quantity to
Avoid Breakage

Model	Voltage	Watts	Lumens	CCT
LED-T8-DF-GL-8FT-42W-40K	120-277V	42w	5,500	4000k
LED-T8-DF-GL-8FT-42W-50K	120-277V	42w	5,500	5000k

Accessory	Description
R17D-EC	R17(D) end cap converter (switchable end cap for 8' tube)



4' T5 Type A+B LED Tube

Box Qty. 30
Must Purchase in
Box Quantity to
Avoid Breakage

Model	Voltage	Watts	Lumens	CCT
LED-T5-DF-4FT-24W-40K	120-277V	24w	3,200	4000k
LED-T5-DF-4FT-24W-50K	120-277V	24w	3,200	5000k



T8 4ft Emergency LED Tube

Box Qty. 30
Must Purchase in
Box Quantity to
Avoid Breakage

Model	Voltage	Watts	Lumens	CCT
LED-T8-EM-4FT-15W-CTRI	120-277V	15w	2,000	35/40/50k
LED-T8-EM-4FT-15W-30K	120-277V	15w	2,000	3000k

3CCT



T8 Type A + B U-Shaped LED Bulbs - 3-CCT

Box Qty. 20
Must Purchase in
Box Quantity to
Avoid Breakage

Model	Voltage	Watts	Lumens	CCT
LED-T8U-DF-GL-22X6-15W-CTRI	120-277V	15w	1,950	35/40/50k

3CCT

Common Applications: Panel Fixture Bulb Replacement




T9 Circline LED Bulbs - 4-CCT

- Install tubes with or without the existing ballast
- See ballast compatibility chart to ensure compatibility
- Light beam spread replicates the same look as a fluorescent, but with improved light output and efficiency
- PC film protectant for shatter protection (food industry OK)

80lm/w
DLC LISTED
Box Qty. 20
Must Purchase in
Box Quantity to
Avoid Breakage

Model	Voltage	Watts	Lumens	CCT
LED-T9-DF-8I-11W-4CCT	120-277V	11w	1,200	30/35/40/50k
LED-T9-DF-12I-16W-4CCT	120-277V	16w	1,700	30/35/40/50k

4CCT

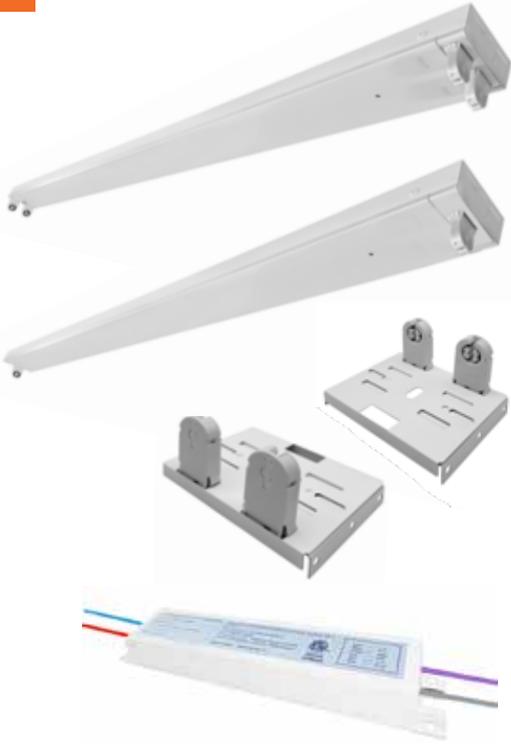

T8 Strip Fixtures (Tubes Not Included)

Box Qty. 10

Model	Description
T8-4FT-2LAMP-STRIP	4 ft T8 2 lamp strip fixture (single sided connection)
T8-4FT-2/1L-STRIP	4 ft T8 1 or 2 lamp strip fixture (double sided connection)
T8-8FT-4/2L-STRIP	8 ft T8 2 or 4 lamp strip fixture (double sided connection)
T8-4FT-RF	4 ft symmetric white reflector

T8 Conversion Kit

Box Qty. 25

Model	Description
T8-8FT-4FT-KIT	T8 conversion kit. One 8ft bulb to two 4ft bulbs.

Dimmable Driver

Box Qty. 10

Model	Description
DIM-MOD-0/10V-TUBE	0-10V dimmable driver for EnVision LED tubes

ALIN & TBL Linear Custom Finish Options *Made to Order, 18-21 days*

GLOSS OPTIONS

Statuary Bronze 60 Gloss T026-BR340 Order Code: GL-BZ-1	RAL 7042 Grey 80 Gloss T009-GR230 Order Code: GL-GY-1	Silver Metallic 30 Gloss T353-GR06 Order Code: GL-SL-1	Chrome Metallic 80 Gloss T358-GR539 Order Code: GL-CH-1	Brass Metallic 30 Gloss T353-YL02 Order Code: GL-BM-1	Dark Red 90 Gloss P009-RD02 Order Code: GL-RD-1	Red 90 Gloss T009-RD01 Order Code: GL-RD-2	Dark Yellow 90 Gloss T009-YL71 Order Code: GL-YL-1	Designer Beige 90 Gloss T009-BG16 Order Code: GL-BG-1
Yellow 90 Gloss T009-YL01 Order Code: GL-YL-2	Terra Brown 90 Gloss (RALB028) • C209-BR358 Order Code: GL-BR-1	Traffic Green 70 Gloss T007-GN16 Order Code: GL-GR-1	DOT Green 70 Gloss FS14066 • T007-GN13 Order Code: GL-GR-2	Green 60 Gloss C006-GN03 Order Code: GL-GR-3	Blue 90 Gloss T009-BL01 Order Code: GL-BU-1	Light Blue 90 Gloss T009-BL05 Order Code: GL-BU-2	Dark Blue 80 Gloss T008-BL20 Order Code: GL-BU-3	Black 10 Semi-Gloss T001-BK120 Order Code: SGL-BL-1

HAMMER OPTIONS

Black Hammer T013-BK62 Order Code: HM-BL-1	Black Hammer Low Gloss E311-BK04 Order Code: HM-BL-2	White Hammer T013-WH09 Order Code: HM-WH-1	Red Hammer T013-RD15 Order Code: HM-RD-1

HAMMERTONE OPTIONS

Bronze Hammertone T064-BR24 Order Code: HT-BZ-1	Silver Hammertone T064-GR05 Order Code: HT-SL-1	Blue Hammertone T064-BL95 Order Code: HT-BU-1	Green Hammertone T064-GN81 Order Code: HT-GR-1

VEIN OPTIONS

Copper Vein T375-BK07 Order Code: VN-CP-1	Gold Vein T375-BK10 Order Code: VN-GD-1

TEXTURE OPTIONS


FS 25109 Blue Texture T032-BL04 Order Code: TX-BU-1	White Texture T032-WH15 Order Code: TX-WH-1	Oil Rubbed Bronze Texture T291-BR251 Order Code: TX-BZ-1	Mock Rock Texture T091-GR309 Order Code: TX-GY-1

G2 Models Arriving 04/2026
G1 Models Available


2" Architectural Linear Fixture: ARCY G2 Models

Suspended or Surface Mounted
Linear Models: Downlight Only - Frosted Lens

Box Qty.
3P12- 9 3P25- 9
3P50- 6 3P75- 4
3P100- 4




NEW	White Finish Models	Voltage	Watts	Lumens	CCT
D	LED-ALIN2-FL-1FT-3P12-D-5CCT-WH	120-277V	9.5/7/5w	1,200/840/600	27/30/35/40/50k
	LED-ALIN2-FL-2FT-3P25-D-5CCT-WH	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
	LED-ALIN2-FL-3FT-3P38-D-5CCT-WH	120-277V	30/22.5/14.5w	3,600/2,700/1,740	27/30/35/40/50k
	LED-ALIN2-FL-4FT-3P50-D-5CCT-WH	120-277V	40/30/20w	4,800/3,600/2,400	27/30/35/40/50k
	LED-ALIN2-FL-6FT-3P75-D-5CCT-WH	120-277V	60/45/30w	7,200/5,400/5,040	27/30/35/40/50k
	LED-ALIN2-FL-8FT-3P100-D-5CCT-WH	120-277V	80/60/40w	9,600/7,200/4,800	27/30/35/40/50k




NEW	Black Finish Models	Voltage	Watts	Lumens	CCT
D	LED-ALIN2-FL-1FT-3P12-D-5CCT-BL	120-277V	9.5/7/5w	1,200/840/600	27/30/35/40/50k
	LED-ALIN2-FL-2FT-3P25-D-5CCT-BL	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
	LED-ALIN2-FL-3FT-3P38-D-5CCT-BL	120-277V	30/22.5/14.5w	3,600/2,700/1,740	27/30/35/40/50k
	LED-ALIN2-FL-4FT-3P50-D-5CCT-BL	120-277V	40/30/20w	4,800/3,600/2,400	27/30/35/40/50k
	LED-ALIN2-FL-6FT-3P75-D-5CCT-BL	120-277V	60/45/30w	7,200/5,400/5,040	27/30/35/40/50k
	LED-ALIN2-FL-8FT-3P100-D-5CCT-BL	120-277V	80/60/40w	9,600/7,200/4,800	27/30/35/40/50k

Suspended Linear Models:
80% Downlight & 20% Uplight - Frosted Lens

Made to order: 5-7 days




NEW	White Finish Models	Voltage	Watts	Lumens	CCT
UD	LED-ALIN2-FL-1FT-3P12-UD-5CCT-WH	120-277V	9.5/7/5w	1,200/840/600	27/30/35/40/50k
	LED-ALIN2-FL-2FT-3P25-UD-5CCT-WH	120-277V	25/19/13w	3,000/2,280/1,560	27/30/35/40/50k
	LED-ALIN2-FL-3FT-3P38-UD-5CCT-WH	120-277V	37.5/28/18w	4,560/3,500/2,250	27/30/35/40/50k
	LED-ALIN2-FL-4FT-3P50-UD-5CCT-WH	120-277V	50/38/25w	6,000/4,560/3,000	27/30/35/40/50k
	LED-ALIN2-FL-6FT-3P75-UD-5CCT-WH	120-277V	75/56/38w	9,000/6,720/4,560	27/30/35/40/50k
	LED-ALIN2-FL-8FT-3P100-UD-5CCT-WH	120-277V	100/75/50w	12,000/9,000/6,000	27/30/35/40/50k




NEW	Black Finish Models	Voltage	Watts	Lumens	CCT
UD	LED-ALIN2-FL-1FT-3P12-UD-5CCT-BL	120-277V	9.5/7/5w	1,200/840/600	27/30/35/40/50k
	LED-ALIN2-FL-2FT-3P25-UD-5CCT-BL	120-277V	25/19/13w	3,000/2,280/1,560	27/30/35/40/50k
	LED-ALIN2-FL-3FT-3P38-UD-5CCT-BL	120-277V	37.5/28/18w	4,560/3,500/2,250	27/30/35/40/50k
	LED-ALIN2-FL-4FT-3P50-UD-5CCT-BL	120-277V	50/38/25w	6,000/4,560/3,000	27/30/35/40/50k
	LED-ALIN2-FL-6FT-3P75-UD-5CCT-BL	120-277V	75/56/38w	9,000/6,720/4,560	27/30/35/40/50k
	LED-ALIN2-FL-8FT-3P100-UD-5CCT-BL	120-277V	100/75/50w	12,000/9,000/6,000	27/30/35/40/50k

Suspended Linear Models:
80% Downlight & 20% Uplight - Frosted Lens

Made to order: 5-7 days



NEW	White Finish Models	Voltage	Watts	Lumens	CCT
UD	LED-ALIN2-FL-2FT-3P25-UDID-5CCT-WH	120-277V	25/19/13w	3,000/2,280/1,560	27/30/35/40/50k
	LED-ALIN2-FL-3FT-3P38-UDID-5CCT-WH	120-277V	37.5/28/18	4,560/3,500/2,250	27/30/35/40/50k
	LED-ALIN2-FL-4FT-3P50-UDID-5CCT-WH	120-277V	50/38/25w	6,000/4,560/3,000	27/30/35/40/50k
	LED-ALIN2-FL-6FT-3P75-UDID-5CCT-WH	120-277V	75/56/38w	9,000/6,720/4,560	27/30/35/40/50k
	LED-ALIN2-FL-8FT-3P100-UDID-5CCT-WH	120-277V	100/75/50w	12,000/9,000/6,000	27/30/35/40/50k



NEW	Black Finish Models	Voltage	Watts	Lumens	CCT
UD	LED-ALIN2-FL-2FT-3P25-UDID-5CCT-BL	120-277V	25/19/13w	3,000/2,280/1,560	27/30/35/40/50k
	LED-ALIN2-FL-3FT-3P38-UDID-5CCT-BL	120-277V	37.5/28/18	4,560/3,500/2,250	27/30/35/40/50k
	LED-ALIN2-FL-4FT-3P50-UDID-5CCT-BL	120-277V	50/38/25w	6,000/4,560/3,000	27/30/35/40/50k
	LED-ALIN2-FL-6FT-3P75-UDID-5CCT-BL	120-277V	75/56/38w	9,000/6,720/4,560	27/30/35/40/50k
	LED-ALIN2-FL-8FT-3P100-UDID-5CCT-BL	120-277V	100/75/50w	12,000/9,000/6,000	27/30/35/40/50k

Suspended or Surface Mounted
Linear Models: Downlight Only - Frosted Lens

NEW	White Finish Models	Voltage	Watts	Lumens	CCT
D	LED-ALIN2-FL-1FT-3P12-D-5CCT-WH-RTK	120-277V	9.5/7/5	1,200/840/600	27/30/35/40/50k
	LED-ALIN2-FL-2FT-3P25-D-5CCT-WH-RTK	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
	LED-ALIN2-FL-3FT-3P38-D-5CCT-WH-RTK	120-277V	30/22.5/14.5w	3,600/2,700/1,740	27/30/35/40/50k
	LED-ALIN2-FL-4FT-3P50-D-5CCT-WH-RTK	120-277V	40/30/20w	4,800/3,600/2,400	27/30/35/40/50k
	LED-ALIN2-FL-6FT-3P75-D-5CCT-WH-RTK	120-277V	60/45/30w	7,200/5,400/5,040	27/30/35/40/50k
	LED-ALIN2-FL-8FT-3P100-D-5CCT-WH-RTK	120-277V	80/60/40w	9,600/7,200/4,800	27/30/35/40/50k

NEW	Black Finish Models	Voltage	Watts	Lumens	CCT
D	LED-ALIN2-FL-1FT-3P12-D-5CCT-BL-RTK	120-277V	9.5/7/5	1,200/840/600	27/30/35/40/50k
	LED-ALIN2-FL-2FT-3P25-D-5CCT-BL-RTK	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
	LED-ALIN2-FL-3FT-3P38-D-5CCT-BL-RTK	120-277V	30/22.5/14.5w	3,600/2,700/1,740	27/30/35/40/50k
	LED-ALIN2-FL-4FT-3P50-D-5CCT-BL-RTK	120-277V	40/30/20w	4,800/3,600/2,400	27/30/35/40/50k
	LED-ALIN2-FL-6FT-3P75-D-5CCT-BL-RTK	120-277V	60/45/30w	7,200/5,400/5,040	27/30/35/40/50k
	LED-ALIN2-FL-8FT-3P100-D-5CCT-BL-RTK	120-277V	80/60/40w	9,600/7,200/4,800	27/30/35/40/50k

Recessed Linear Models for T-Bar

NEW	White Finish Models	Voltage	Watts	Lumens	CCT
D	LED-ALIN2-FL-2FT-3P25-D-5CCT-WH-TB	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
	LED-ALIN2-FL-4FT-3P50-D-5CCT-WH-TB	120-277V	40/30/20w	4,800/3,600/2,400	27/30/35/40/50k
	LED-ALIN2-FL-6FT-3P75-D-5CCT-WH-TB	120-277V	60/45/30w	7,200/5,400/5,040	27/30/35/40/50k
	LED-ALIN2-FL-8FT-3P100-D-5CCT-WH-TB	120-277V	80/60/40w	9,600/7,200/4,800	27/30/35/40/50k

Recessed Linear Models for T-Bar

NEW	Black Finish Models	Voltage	Watts	Lumens	CCT
D	LED-ALIN2-FL-2FT-3P25-D-5CCT-BL-TB	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
	LED-ALIN2-FL-4FT-3P50-D-5CCT-BL-TB	120-277V	40/30/20w	4,800/3,600/2,400	27/30/35/40/50k
	LED-ALIN2-FL-6FT-3P75-D-5CCT-BL-TB	120-277V	60/45/30w	7,200/5,400/5,040	27/30/35/40/50k
	LED-ALIN2-FL-8FT-3P100-D-5CCT-BL-TB	120-277V	80/60/40w	9,600/7,200/4,800	27/30/35/40/50k

Trimless Linear Models

Made to order: 5-7 days

Box Qty: 4


NEW	Trimless Model	Voltage	Watts	Lumens	CCT
D	LED-ALIN2-FL-1FT-3P12-D-5CCT-TML	120-277V	9.5/7/5	1,200/840/600	27/30/35/40/50k
	LED-ALIN2-FL-2FT-3P25-D-5CCT-TML	120-277V	20/15/10w	2,400/1800/1200	27/30/35/40/50k
	LED-ALIN2-FL-3FT-3P38-D-5CCT-TML	120-277V	30/22.5/14.5w	3,600/2700/1740	27/30/35/40/50k
	LED-ALIN2-FL-4FT-3P50-D-5CCT-TML	120-277V	40/30/20w	4,800/3600/2400	27/30/35/40/50k
	LED-ALIN2-FL-6FT-3P75-D-5CCT-TML	120-277V	60/45/30w	7,200/5400/5040	27/30/35/40/50k
	LED-ALIN2-FL-8FT-3P100-D-5CCT-TML	120-277V	80/60/40w	9,600/7200/4800	27/30/35/40/50k

Suspended or Surface Mounted Special
Shape Models: Downlight Only


Box Qty: 4

NEW	White Finish Models	Voltage	Watts	Lumens	CCT
D	LED-ALIN2-FL-12X12-L-3P25-D-5CCT-WH	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
	LED-ALIN2-FL-12X12-120L-3P25-D-5CCT-WH	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
	LED-ALIN2-FL-12X12-135L-3P25-D-5CCT-WH	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
	LED-ALIN2-FL-24X24-L-3P50-D-5CCT-WH	120-277V	40/30/20w	4,800/3,600/2,400	27/30/35/40/50k
	LED-ALIN2-FL-22X10-T-3P36-D-5CCT-WH	120-277V	29/20/13.5w	3,480/2,400/1,620	27/30/35/40/50k
	LED-ALIN2-FL-22X22-X-3P50-D-5CCT-WH	120-277V	40/30/20w	4,800/3,600/2,400	27/30/35/40/50k

NEW	Black Finish Models	Voltage	Watts	Lumens	CCT
D	LED-ALIN2-FL-12X12-L-3P25-D-5CCT-BL	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
	LED-ALIN2-FL-12X12-120L-3P25-D-5CCT-BL	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
	LED-ALIN2-FL-12X12-135L-3P25-D-5CCT-BL	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
	LED-ALIN2-FL-24X24-L-3P50-D-5CCT-BL	120-277V	40/30/20w	4,800/3,600/2,400	27/30/35/40/50k
	LED-ALIN2-FL-22X10-T-3P36-D-5CCT-BL	120-277V	29/20/13.5w	3,480/2,400/1,620	27/30/35/40/50k
	LED-ALIN2-FL-22X22-X-3P50-D-5CCT-BL	120-277V	40/30/20w	4,800/3,600/2,400	27/30/35/40/50k




LED-ALIN2-FL-12X12-L-3P25



LED-ALIN2-FL-24X24-L-3P50

Suspended Special Shape Models:
80% Downlight & 20% Uplight - Frosted Lens

Box Qty: 4




LED-ALIN2-FL-12X12-L-3P25



White Finish Models	Voltage	Watts	Lumens	CCT
LED-ALIN2-FL-12X12-L-3P25-UD-5CCT-WH	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
LED-ALIN2-FL-12X12-120L-3P25-UD-5CCT-WH	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
LED-ALIN2-FL-12X12-135L-3P25-UD-5CCT-WH	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
LED-ALIN2-FL-24X24-L-3P50-UD-5CCT-WH	120-277V	50/38/25w	6,000/4,560/3,000	27/30/35/40/50k
LED-ALIN2-FL-22X10-T-3P36-UD-5CCT-WH	120-277V	36/25/17w	4,320/3,000/2,040	27/30/35/40/50k
LED-ALIN2-FL-22X22-X-3P50-UD-5CCT-WH	120-277V	50/38/25w	6,000/4,560/3,000	27/30/35/40/50k



Box Qty: 4



LED-ALIN2-FL-24X24-L-3P50




Black Finish Models	Voltage	Watts	Lumens	CCT
LED-ALIN2-FL-12X12-L-3P25-UD-5CCT-BL	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
LED-ALIN2-FL-12X12-120L-3P25-UD-5CCT-BL	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
LED-ALIN2-FL-12X12-135L-3P25-UD-5CCT-BL	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
LED-ALIN2-FL-24X24-L-3P50-UD-5CCT-BL	120-277V	50/38/25w	6,000/4,560/3,000	27/30/35/40/50k
LED-ALIN2-FL-22X10-T-3P36-UD-5CCT-BL	120-277V	36/25/17w	4,320/3,000/2,040	27/30/35/40/50k
LED-ALIN2-FL-22X22-X-3P50-UD-5CCT-BL	120-277V	50/38/25w	6,000/4,560/3,000	27/30/35/40/50k



Suspended Special Shape Models:
80% Downlight & 20% Uplight

Box Qty: 4




LED-ALIN2-FL-12X12-120L-3P25-UDID



White Finish Models	Voltage	Watts	Lumens	CCT
LED-ALIN2-FL-12X12-L-3P25-UDID-5CCT-WH	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
LED-ALIN2-FL-12X12-120L-3P25-UDID-5CCT-WH	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
LED-ALIN2-FL-12X12-135L-3P25-UDID-5CCT-WH	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
LED-ALIN2-FL-24X24-L-3P50-UDID-5CCT-WH	120-277V	50/38/25w	6,000/4,560/3,000	27/30/35/40/50k
LED-ALIN2-FL-22X10-T-3P36-UDID-5CCT-WH	120-277V	36/25/17w	4,320/3,000/2,040	27/30/35/40/50k
LED-ALIN2-FL-22X22-X-3P50-UDID-5CCT-WH	120-277V	50/38/25w	6,000/4,560/3,000	27/30/35/40/50k



Box Qty: 4



LED-ALIN2-FL-12X12-120L-3P25-UDID




Black Finish Models	Voltage	Watts	Lumens	CCT
LED-ALIN2-FL-12X12-L-3P25-UDID-5CCT-BL	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
LED-ALIN2-FL-12X12-120L-3P25-UDID-5CCT-BL	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
LED-ALIN2-FL-12X12-135L-3P25-UDID-5CCT-BL	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
LED-ALIN2-FL-24X24-L-3P50-UDID-5CCT-BL	120-277V	50/38/25w	6,000/4,560/3,000	27/30/35/40/50k
LED-ALIN2-FL-22X10-T-3P36-UDID-5CCT-BL	120-277V	36/25/17w	4,320/3,000/2,040	27/30/35/40/50k
LED-ALIN2-FL-22X22-X-3P50-UDID-5CCT-BL	120-277V	50/38/25w	6,000/4,560/3,000	27/30/35/40/50k



Suspended or Surface Mounted Special
Shape Models: Downlight Only

Box Qty: 4



LED-ALIN2-FL-22X10-T-3P36-D



White Finish Models	Voltage	Watts	Lumens	CCT
LED-ALIN2-FL-12X12-L-3P25-D-5CCT-WH-RTK	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
LED-ALIN2-FL-12X12-120L-3P25-D-5CCT-WH-RTK	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
LED-ALIN2-FL-12X12-135L-3P25-D-5CCT-WH-RTK	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
LED-ALIN2-FL-24X24-L-3P50-D-5CCT-WH-RTK	120-277V	40/30/20w	4,800/3,600/2,400	27/30/35/40/50k
LED-ALIN2-FL-22X10-T-3P36-D-5CCT-WH-RTK	120-277V	29/20/13.5w	3,480/2,400/1,620	27/30/35/40/50k
LED-ALIN2-FL-22X22-X-3P50-D-5CCT-WH-RTK	120-277V	40/30/20w	4,800/3,600/2,400	27/30/35/40/50k



Suspended or Surface Mounted Special
Shape Models: Downlight Only

Box Qty: 4



Black Finish Models	Voltage	Watts	Lumens	CCT
LED-ALIN2-FL-12X12-L-3P25-D-5CCT-BL-RTK	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
LED-ALIN2-FL-12X12-120L-3P25-D-5CCT-BL-RTK	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
LED-ALIN2-FL-12X12-135L-3P25-D-5CCT-BL-RTK	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
LED-ALIN2-FL-24X24-L-3P50-D-5CCT-BL-RTK	120-277V	40/30/20w	4,800/3,600/2,400	27/30/35/40/50k
LED-ALIN2-FL-22X10-T-3P36-D-5CCT-BL-RTK	120-277V	29/20/13.5w	3,480/2,400/1,620	27/30/35/40/50k
LED-ALIN2-FL-22X22-X-3P50-D-5CCT-BL-RTK	120-277V	40/30/20w	4,800/3,600/2,400	27/30/35/40/50k




Suspended or Surface Mounted Special Shape Models: Downlight Only

Box Qty: 4

NEW

D


Model	Voltage	Watts	Lumens	CCT
LED-ALIN2-FL-12X12-L-3P25-D-5CCT-TML	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
LED-ALIN2-FL-12X12-120L-3P25-D-5CCT-TML	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
LED-ALIN2-FL-12X12-135L-3P25-D-5CCT-TML	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
LED-ALIN2-FL-24X24-L-3P50-D-5CCT-TML	120-277V	40/30/20w	4,800/3,600/2,400	27/30/35/40/50k
LED-ALIN2-FL-22X10-T-3P36-D-5CCT-TML	120-277V	29/20/13.5w	3,480/2,400/1,620	27/30/35/40/50k
LED-ALIN2-FL-22X22-X-3P50-D-5CCT-TML	120-277V	40/30/20w	4,800/3,600/2,400	27/30/35/40/50k

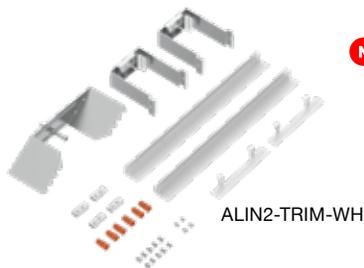

Recessed Drywall Trim Kit Bracket for Field Install - White Finish - QUICKSHIP


NEW

White Finish Models	Description
ALIN2-1FT-TRIM-WH	1' Recessed Trim Bracket - White
ALIN2-2FT-TRIM-WH	2' Recessed Trim Bracket - White
ALIN2-3FT-TRIM-WH	3' Recessed Trim Bracket - White
ALIN2-4FT-TRIM-WH	4' Recessed Trim Bracket - White
ALIN2-6FT-TRIM-WH	6' Recessed Trim Bracket - White
ALIN2-8FT-TRIM-WH	8' Recessed Trim Bracket - White

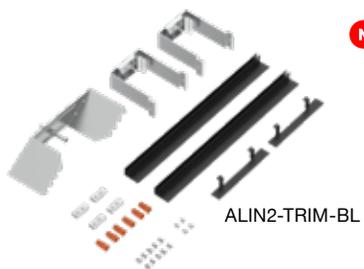

NEW

Black Finish Models	Description
ALIN2-1FT-TRIM-BL	1' Recessed Trim Bracket - Black
ALIN2-2FT-TRIM-BL	2' Recessed Trim Bracket - Black
ALIN2-3FT-TRIM-BL	3' Recessed Trim Bracket - Black
ALIN2-4FT-TRIM-BL	4' Recessed Trim Bracket - Black
ALIN2-6FT-TRIM-BL	6' Recessed Trim Bracket - Black
ALIN2-8FT-TRIM-BL	8' Recessed Trim Bracket - Black

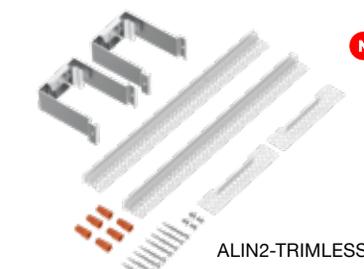

Recessed Trimless Bracket for Field Install - QUICKSHIP



NEW

Model	Description
ALIN2-1FT-TRIMLESS	1' Recessed Trimless Bracket
ALIN2-2FT-TRIMLESS	2' Recessed Trimless Bracket
ALIN2-3FT-TRIMLESS	3' Recessed Trimless Bracket
ALIN2-4FT-TRIMLESS	4' Recessed Trimless Bracket
ALIN2-6FT-TRIMLESS	6' Recessed Trimless Bracket
ALIN2-8FT-TRIMLESS	8' Recessed Trimless Bracket

ALIN2 Lens Options

NEW

Model	Description
ALIN2-1FT-HCB	1' Honeycomb Lens
ALIN2-1FT-BFL	1' Baffle Anti-Glare Lens
ALIN2-FL-48FT	48' Frosted Lens Roll
ALIN2-FL-82FT	82' Frosted Lens Roll

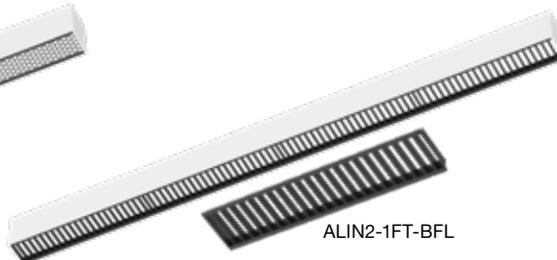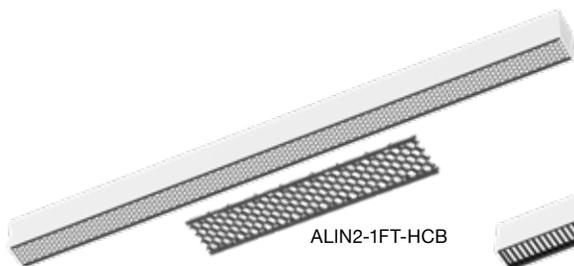



ALIN2-JOIN

Joining Bracket

NEW

Model	Description
ALIN2-JOIN	Link Two ALIN Fixtures Together



ALIN2-SM-WH

ALIN2-SM-BL

NEW

Model	Description
ALIN2-SM-WH	ALIN2 Surface Mount Kit (White)
ALIN2-SM-BL	ALIN2 Surface Mount Kit (Black)



ALIN2-WM-WH

ALIN2-WM-BL

NEW

Field Install Wall Mount - Includes Power Cord

Model	Description
ALIN2-WM-WH	Wall Mount - Includes 2 pieces (White)
ALIN2-WM-BL	Wall Mount - Includes 2 pieces (Black)



ALIN-TG-SM-1516
ALIN-TG-SM-916

NEW

Surface Mount

Model	Description
ALIN-TG-SM-1516	T-Grid Surface Mount 15/16
ALIN-TG-SM-916	T-Grid Surface Mount 9/16



ALIN-1FT
ALIN-2FT
ALIN-4FT

NEW

Field Installation Up Light

Model	Description
ALIN-1FT-UL-5CCT	1' Up Light
ALIN-2FT-UL-5CCT	2' Up Light (Can connect with 4' uplight)
ALIN-4FT-UL-5CCT	4' Up Light (Can connect with more 2' and 4' uplight)



SCK-5-BL

NEW

Suspension Kit - 5 Wire

Model	Description
SCK-5-6FT-WH	Suspension Kit: 1 x 6' 5-Wire White Cord, 2 x 6' Cable, 2 x Canopy
SCK-5-6FT-BL	Suspension Kit: 1 x 6' 5-Wire Black Cord, 2 x 6' Cable, 2 x Canopy
SCK-5-12FT-WH	Suspension Kit: 1 x 12' 5-Wire White Cord, 2 x 6' Cable, 2 x Canopy
SCK-5-12FT-BL	Suspension Kit: 1 x 12' 5-Wire Black Cord, 2 x 6' Cable, 2 x Canopy
SCK-5-20FT-WH	Suspension Kit: 1 x 20' 5-Wire White Cord, 2 x 6' Cable, 2 x Canopy
SCK-5-20FT-BL	Suspension Kit: 1 x 20' 5-Wire Black Cord, 2 x 6' Cable, 2 x Canopy



SCK-5-WH


NEW

Suspension Kit - 6 Wire - For EMB Option

Model	Description
SCK-6-6FT-WH	Suspension Kit: 1 x 6' 6-Wire White Cord, 2 x 6' Cable, 2 x Canopy
SCK-6-6FT-BL	Suspension Kit: 1 x 6' 6-Wire Black Cord, 2 x 6' Cable, 2 x Canopy
SCK-6-12FT-WH	Suspension Kit: 1 x 12' 6-Wire White Cord, 2 x 6' Cable, 2 x Canopy
SCK-6-12FT-BL	Suspension Kit: 1 x 12' 6-Wire Black Cord, 2 x 6' Cable, 2 x Canopy
SCK-6-20FT-WH	Suspension Kit: 1 x 20' 6-Wire White Cord, 2 x 6' Cable, 2 x Canopy
SCK-6-20FT-BL	Suspension Kit: 1 x 20' 6-Wire Black Cord, 2 x 6' Cable, 2 x Canopy

Factory Install Options


Model	Description
Add '-EMB' to model #	Emergency backup (external 15W)
Add '-BMS' to model #	Bi-level motion + daylight sensor
Add: 20KV to model #	SG-20KV-UNV: 20KV surge protector

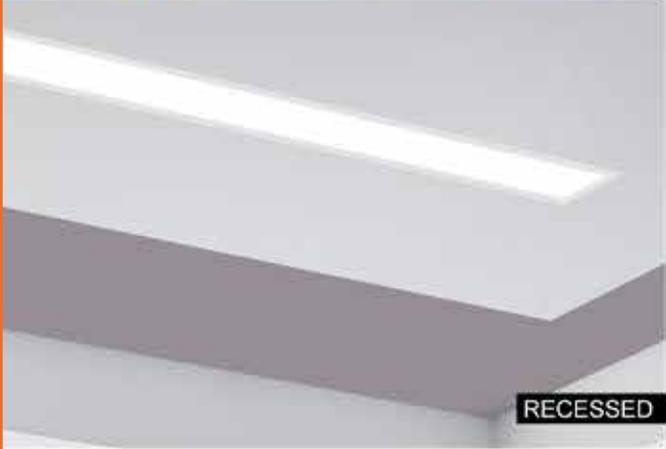

2" Architectural Linear Fixture: G1 Series

Suspended Linear Models: Downlight Only

Box Qty.
3P12-9 3P25-9
3P50-6 3P75-4
3P100-4



D

White Finish Models	Voltage	Watts	Lumens	CCT
LED-ALIN2-1FT-3P12-D-5CCT-WH	120-277V	9.5/7/5w	1,200/840/600	27/30/35/40/50k
LED-ALIN2-2FT-3P25-D-5CCT-WH	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
LED-ALIN2-3FT-3P38-D-5CCT-WH	120-277V	30/22.5/14.5w	3,600/2,700/1,740	27/30/35/40/50k
LED-ALIN2-4FT-3P50-D-5CCT-WH	120-277V	40/30/20w	4,800/3,600/2,400	27/30/35/40/50k
LED-ALIN2-6FT-3P75-D-5CCT-WH	120-277V	60/45/30w	7,200/5,400/5,040	27/30/35/40/50k
LED-ALIN2-8FT-3P100-D-5CCT-WH	120-277V	80/60/40w	9,600/7,200/4,800	27/30/35/40/50k

Suspended Linear Models: 80% Down & 20% Up

Made to order: 5-7 days



UD

White Finish Models	Voltage	Watts	Lumens	CCT
LED-ALIN2-2FT-3P25-UD-5CCT-WH	120-277V	25/19/13w	3,000/2,280/1,560	27/30/35/40/50k
LED-ALIN2-3FT-3P38-UD-5CCT-WH	120-277V	37.5/28/18w	4,560/3,500/2,250	27/30/35/40/50k
LED-ALIN2-4FT-3P50-UD-5CCT-WH	120-277V	50/38/25w	6,000/4,560/3,000	27/30/35/40/50k
LED-ALIN2-6FT-3P75-UD-5CCT-WH	120-277V	75/56/38w	9,000/6,720/4,560	27/30/35/40/50k
LED-ALIN2-8FT-3P100-UD-5CCT-WH	120-277V	100/75/50w	12,000/9,000/6,000	27/30/35/40/50k

Recessed Linear Models

Made to order: 5-7 days



D

White Finish Models	Voltage	Watts	Lumens	CCT
LED-ALIN2-1FT-3P12-D-5CCT-WH-RTK	120-277V	9.5/7/5	1,200/840/600	27/30/35/40/50k
LED-ALIN2-2FT-3P25-D-5CCT-WH-RTK	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
LED-ALIN2-3FT-3P38-D-5CCT-WH-RTK	120-277V	30/22.5/14.5w	3,600/2,700/1,740	27/30/35/40/50k
LED-ALIN2-4FT-3P50-D-5CCT-WH-RTK	120-277V	40/30/20w	4,800/3,600/2,400	27/30/35/40/50k
LED-ALIN2-6FT-3P75-D-5CCT-WH-RTK	120-277V	60/45/30w	7,200/5,400/5,040	27/30/35/40/50k
LED-ALIN2-8FT-3P100-D-5CCT-WH-RTK	120-277V	80/60/40w	9,600/7,200/4,800	27/30/35/40/50k

Recessed Linear Models for T-Bar



D

White Finish Models	Voltage	Watts	Lumens	CCT
LED-ALIN2-2FT-3P25-D-5CCT-WH-TB	120-277V	20/15/10w	2,400/1,800/1,200	27/30/35/40/50k
LED-ALIN2-4FT-3P50-D-5CCT-WH-TB	120-277V	40/30/20w	4,800/3,600/2,400	27/30/35/40/50k
LED-ALIN2-6FT-3P75-D-5CCT-WH-TB	120-277V	60/45/30w	7,200/5,400/5,040	27/30/35/40/50k
LED-ALIN2-8FT-3P100-D-5CCT-WH-TB	120-277V	80/60/40w	9,600/7,200/4,800	27/30/35/40/50k

Trimless Linear Models


Made to order: 5-7 days

Box Qty: 4



D

White Finish Models	Voltage	Watts	Lumens	CCT
LED-ALIN2-1FT-3P12-D-5CCT-WH-TML	120-277V	9.5/7/5	1200/840/600	27/30/35/40/50k
LED-ALIN2-2FT-3P25-D-5CCT-WH-TML	120-277V	20/15/10w	2400/1800/1200	27/30/35/40/50k
LED-ALIN2-3FT-3P38-D-5CCT-WH-TML	120-277V	30/22.5/14.5w	3600/2700/1740	27/30/35/40/50k
LED-ALIN2-4FT-3P50-D-5CCT-WH-TML	120-277V	40/30/20w	4800/3600/2400	27/30/35/40/50k
LED-ALIN2-6FT-3P75-D-5CCT-WH-TML	120-277V	60/45/30w	7200/5400/5040	27/30/35/40/50k
LED-ALIN2-8FT-3P100-D-5CCT-WH-TML	120-277V	80/60/40w	9600/7200/4800	27/30/35/40/50k




LED-ALIN2-12X12-L-3P25



Suspended or Surface Mounted Special Shape Models: Downlight Only

Box Qty: 4

White Finish Models	Voltage	Watts	Lumens	CCT
LED-ALIN2-12X12-L-3P25-D-5CCT-WH	120-277V	20/15/10w	2400/1800/1200	27/30/35/40/50k
LED-ALIN2-12X12-120L-3P25-D-5CCT-WH	120-277V	20/15/10w	2400/1800/1200	27/30/35/40/50k
LED-ALIN2-24X24-L-3P50-D-5CCT-WH	120-277V	40/30/20w	4800/3600/2400	27/30/35/40/50k
LED-ALIN2-22X10-T-3P36-D-5CCT-WH	120-277V	29/20/13.5w	3480/2400/1620	27/30/35/40/50k
LED-ALIN2-22X22-X-3P50-D-5CCT-WH	120-277V	40/30/20w	4800/3600/2400	27/30/35/40/50k



LED-ALIN2-24X24-L-3P50




Suspended Special Shape Models: 80% Downlight & 20% Uplight

Made to order: 5-7 days

Box Qty: 4

White Finish Models	Voltage	Watts	Lumens	CCT
LED-ALIN2-12X12-L-3P25-UD-5CCT-WH	120-277V	25/19/13w	3000/2280/1560	27/30/35/40/50k
LED-ALIN2-12X12-120L-3P25-UD-5CCT-WH	120-277V	25/19/13w	3000/2280/1560	27/30/35/40/50k
LED-ALIN2-24X24-L-3P25-UD-5CCT-WH	120-277V	50/38/25w	6000/4560/3000	27/30/35/40/50k
LED-ALIN2-22X10-T-3P36-UD-5CCT-WH	120-277V	36/25/17w	4320/3000/2040	27/30/35/40/50k
LED-ALIN2-22X22-X-3P50-UD-5CCT-WH	120-277V	50/38/25w	6000/4560/3000	27/30/35/40/50k



LED-ALIN2-12X12-120L-3P25




Recessed Special Shape Models

Made to order: 5-7 days

Box Qty: 4

White Finish Models	Voltage	Watts	Lumens	CCT
LED-ALIN2-12X12-L-3P25-D-5CCT-WH-RTK	120-277V	20/15/10w	2400/1800/1200	27/30/35/40/50k
LED-ALIN2-12X12-120L-3P25-D-5CCT-WH-RTK	120-277V	20/15/10w	2400/1800/1200	27/30/35/40/50k
LED-ALIN2-24X24-L-3P25-D-5CCT-WH-RTK	120-277V	40/30/20w	4800/3600/2400	27/30/35/40/50k
LED-ALIN2-22X10-T-3P36-D-5CCT-WH-RTK	120-277V	29/20/13.5w	3480/2400/1620	27/30/35/40/50k
LED-ALIN2-22X22-X-3P50-D-5CCT-WH-RTK	120-277V	40/30/20w	4800/3600/2400	27/30/35/40/50k



LED-ALIN2-22X10-T-3P36




Trimless Special Shape Models

Made to order: 5-7 days

Box Qty: 4

White Finish Models	Voltage	Watts	Lumens	CCT
LED-ALIN2-12X12-L-3P25-D-5CCT-WH-TML	120-277V	20/15/10w	2400/1800/1200	27/30/35/40/50k
LED-ALIN2-12X12-120L-3P25-D-5CCT-WH-TML	120-277V	20/15/10w	2400/1800/1200	27/30/35/40/50k
LED-ALIN2-24X24-L-3P25-D-5CCT-WH-TML	120-277V	40/30/20w	4800/3600/2400	27/30/35/40/50k
LED-ALIN2-22X10-T-3P36-D-5CCT-WH-TML	120-277V	29/20/13.5w	3480/2400/1620	27/30/35/40/50k
LED-ALIN2-22X22-X-3P50-D-5CCT-WH-TML	120-277V	40/30/20w	4800/3600/2400	27/30/35/40/50k



LED-ALIN2-22X22-X-3P50




Suspended or Surface Mounted Connector Models: Downlight Only

Box Qty: 10

White Finish Models	Voltage	Watts	Lumens	CCT
LED-ALIN2-L-D-5CCT-WH	120-277V	7/5/3.5w	840/600/420	27/30/35/40/50k
LED-ALIN2-X-D-5CCT-WH	120-277V	10/7.5/5w	1200/900/600	27/30/35/40/50k
LED-ALIN2-Y-D-5CCT-WH	120-277V	7/5/3.5w	840/600/420	27/30/35/40/50k
LED-ALIN2-T-D-5CCT-WH	120-277V	7/5/3.5w	840/600/420	27/30/35/40/50k
LED-ALIN2-120L-D-5CCT-WH	120-277V	7/5/3.5w	840/600/420	27/30/35/40/50k






LED-ALIN2-120L-D-5CCT-WH



Recessed Connector Models

Made to order: 5-7 days Box Qty: 10

White Finish Models	Voltage	Watts	Lumens	CCT
LED-ALIN2-L-D-5CCT-WH-RTK	120-277V	7/5/3.5w	840/600/420	27/30/35/40/50k
LED-ALIN2-X-D-5CCT-WH-RTK	120-277V	10/7.5/5w	1200/900/600	27/30/35/40/50k
LED-ALIN2-Y-D-5CCT-WH-RTK	120-277V	7/5/3.5w	840/600/420	27/30/35/40/50k
LED-ALIN2-T-D-5CCT-WH-RTK	120-277V	7/5/3.5w	840/600/420	27/30/35/40/50k
LED-ALIN2-120L-D-5CCT-WH-RTK	120-277V	7/5/3.5w	840/600/420	27/30/35/40/50k




LED-ALIN2-L-D-5CCT-WH




Trimless Connector Models

Made to order: 5-7 days Box Qty: 10

White Finish Models	Voltage	Watts	Lumens	CCT
LED-ALIN2-L-D-5CCT-WH-TML	120-277V	7/5/3.5w	840/600/420	27/30/35/40/50k
LED-ALIN2-X-D-5CCT-WH-TML	120-277V	10/7.5/5w	1200/900/600	27/30/35/40/50k
LED-ALIN2-Y-D-5CCT-WH-TML	120-277V	7/5/3.5w	840/600/420	27/30/35/40/50k
LED-ALIN2-T-D-5CCT-WH-TML	120-277V	7/5/3.5w	840/600/420	27/30/35/40/50k
LED-ALIN2-120L-D-5CCT-WH-TML	120-277V	7/5/3.5w	840/600/420	27/30/35/40/50k



LED-ALIN2-X-D-5CCT-WH



LED-ALIN2-Y-D-5CCT-WH

Field Install Uplight

Box Qty: 2ft-1 4ft-2

Model	Voltage	Watts	Lumens	CCT
ALIN-12x12L-UL-5CCT	120-277V	5/4/2.5w	600/480/300	27/30/35/40/50k
ALIN-2FT-UL-5CCT	120-277V	5/4/2.5w	600/480/300	27/30/35/40/50k
ALIN-4FT-UL-5CCT	120-277V	10/7.5/5w	1200/900/600	27/30/35/40/50k



ALIN-WM-WH

Field Install Wall Mount - Includes Power Cord

Model	Description
ALIN-WM-WH	Wall Mount (Includes 2 pieces)

Suspension Rods

Model	Description
ALIN2-2/4FT-SRK-WH	Suspension rod kit 2'/4' length
ALIN2-2/4FT-SRK-BL	Suspension rod kit 2'/4' length



ALIN2-2/4FT-SRK-WH
ALIN2-2/4FT-SRK-BL

Suspension Kit

Model	Description
SK-6FT-CPR-1WR-WH	Suspension Kit: 6' Canopy Top 1 Wire (2 pcs)
SK-6FT-CPR-1WR-BL	Suspension Kit: 6' Canopy Top 1 Wire (2 pcs)
SK-12FT-CPR-1WR-WH	Suspension kit: 12' canopy top 1 wire (2 pcs)
SK-12FT-CPR-1WR-BL	Suspension kit: 12' canopy top 1 wire (2 pcs)



SK-6FT-CPR-1WR-WH
SK-6FT-CPR-1WR-BL
SK-12FT-CPR-1WR-WH
SK-12FT-CPR-1WR-BL

Surface Mount Kit

Model	Description
ALIN2-SM	ALIN2 Surface Mount Kit

Model	Description
Add '-EMB' to model #	Emergency backup (external 15W)
Add '-BMS' to model #	Bi-level motion + daylight sensor
Add: 20KV to model #	SG-20KV-UNV: 20KV surge protector



ALIN2-SM



2' / 4' / 8' LED Suspended Tubular Linear: Arcy

Suspended or Surface Mounted Linear
Models: Downlight Only



Box Qty for 2FT: 12
Box Qty for 4FT: 6 Box Qty
for 8FT: 6

D

Model	Voltage	Watts	CCT
LED-TBL-2FT-20W-D-4CCT-WH	120-277V	20w	30/35/40/50k
LED-TBL-4FT-40W-D-4CCT-WH	120-277V	40w	30/35/40/50k
LED-TBL-8FT-80W-D-4CCT-WH	120-277V	80w	30/35/40/50k

4CCT

WATT	LUMENS
20	2,300
40	4,600
80	9,200

UD

Suspended Linear Models: 80% Downlight & 20% Uplight

Model	Voltage	Watts	CCT
LED-TBL-2FT-20W-UD-4CCT-WH	120-277V	20w	30/35/40/50k
LED-TBL-4FT-40W-UD-4CCT-WH	120-277V	40w	30/35/40/50k
LED-TBL-8FT-80W-UD-4CCT-WH	120-277V	80w	30/35/40/50k

4CCT



SK-6FT-I-CP-TH



TBL-L

Accessories

Model	Description
SK-6FT-I-CP-TH	6" Suspension kit for ATL
TBL-L	L-shape connector

Model	Description
Add: -EMB to model #	90 minute emergency backup
Add: -BMS to model #	Bi level motion + daylight sensor
Add: 20KV to model#	SG-20KV-UNV: 20KV surge protector



-WH

-BL

4' Drop Lens Suspended Linear: C

Suspended Linear Models: Downlight Only



Box Qty.
6


D

Model	Voltage	Watts	CCT
LED-ELIN-4FT-3P50-5CCT-WH	120-277V	50/40/30w	27/30/35/40/50k
LED-ELIN-4FT-3P50-5CCT-BL	120-277V	50/40/30w	27/30/35/40/50k

5CCT

WATT	LUMENS
30	3,900
40	5,200
50	6,500

Factory Install Options	Description
Add: -EMB to model #	90 minute emergency backup

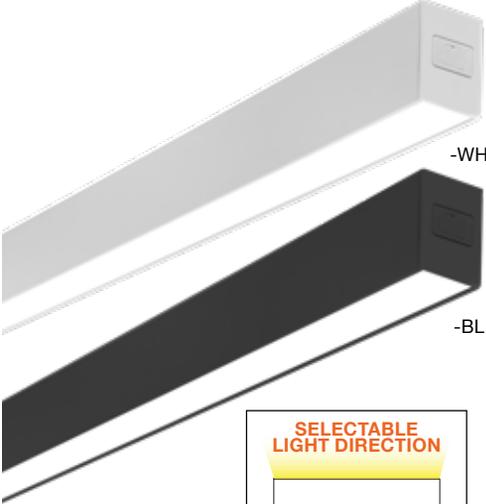

2' / 4' / 8' Suspended Linear Up & Downlight: C

Suspended Linear Models: Down or Uplight

Box Qty. 6


5CCT

Model	Voltage	Watts	CCT
LED-UDL2-2FT-3P25-5CCT-WH	120-277V	25/20/15w	27/30/35/40/50k
LED-UDL2-2FT-3P25-5CCT-BL	120-277V	25/20/15w	27/30/35/40/50k
LED-UDL2-4FT-3P50-5CCT-WH	120-277V	50/40/30w	27/30/35/40/50k
LED-UDL2-4FT-3P50-5CCT-BL	120-277V	50/40/30w	27/30/35/40/50k
LED-UDL2-8FT-3P100-5CCT-WH	120-277V	100/80/60w	27/30/35/40/50k
LED-UDL2-8FT-3P100-5CCT-BL	120-277V	100/80/60w	27/30/35/40/50k

2FT		4FT		8FT	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
15	1,875	30	3,750	60	7,500
20	2,500	40	5,000	80	10,000
25	3,125	50	6,250	100	12,500



Wattage Select 5-CCT Select Uplight Select




5-Wire Power Cables

Accessory	Description
SJT-18-5-6FT-WH	6' 5-Wire Power Cord (White)
SJT-18-5-6FT-BL	6' 5-Wire Power Cord (Black)

Canopy Kit Accessores

Accessory	Description
UDL2-6FT-CPR-1WR-WH	Suspension Kit: 6' Canopy Top 1 Wire (2 pcs)
UDL2-6FT-CPR-1WR-BL	Suspension Kit: 6' Canopy Top 1 Wire (2 pcs)

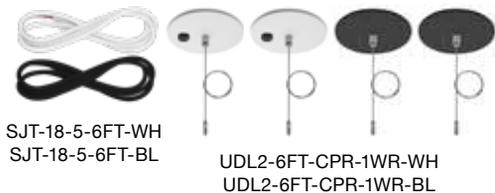

SJT-18-5-6FT-WH
SJT-18-5-6FT-BL

UDL2-6FT-CPR-1WR-WH
UDL2-6FT-CPR-1WR-BL


Emergency Canopy Kit

Accessory	Description
UDL2-6FT-CPR-1WR-WH-EMB	6' Canopy Kit w/ EMB & 6' SJT Cord (Black)
UDL2-6FT-CPR-1WR-BL-EMB	6' Canopy Kit w/ EMB & 6' SJT Cord (White)




UDL2-6FT-CPR-1WR-WH-EMB
UDL2-6FT-CPR-1WR-BL-EMB

Accessory	Description
UDL-J	Straight joiner
UDL-4XJ-WH	4-way joiner (White)
UDL-4XJ-BL	4-way joiner (Black)

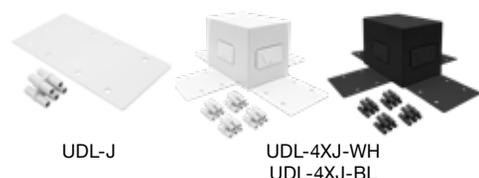

UDL-J

UDL-4XJ-WH
UDL-4XJ-BL

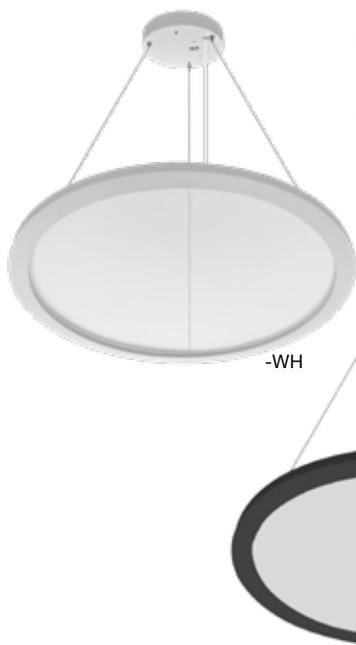

23" Suspended Cylinder: Arcy - 3-CCT

Box Qty. 2

3CCT

Model	Voltage	Watts	Lumens	CCT
LED-SRD-23-50W-UD-RTRI-WH	120-277V	50w	5,000	35/40/50k
LED-SRD-23-50W-UD-RTRI-BL	120-277V	50w	5,000	35/40/50k

Factory Install Options	Description
Add: -EMB to Model #	90 minute emergency backup





2' /4' /8' Round Strip LED Fixture
5-CCT, 3-Power, Sensor Ready



Model	Voltage	Watts	CCT
LED-RST-2FT-3M25W-5CCT-SR	120-277V	25/20/15w	30/35/40/50/65k
LED-RST-2FT-3M25W-5CCT-SR-BL	120-277V	25/20/15w	30/35/40/50/65k
LED-RST-4FT-3M40W-5CCT-SR	120-277V	40/30/20w	30/35/40/50/65k
LED-RST-4FT-3M40W-5CCT-SR-BL	120-277V	40/30/20w	30/35/40/50/65k
LED-RST-4FT-3M80W-5CCT-SR	120-277V	80/65/50w	30/35/40/50/65k
LED-RST-8FT-3M60W-5CCT-SR	120-277V	60/50/40w	30/35/40/50/65k
LED-RST-8FT-3M60W-5CCT-SR-BL	120-277V	60/50/40w	30/35/40/50/65k
LED-RST-8FT-3M100W-5CCT-SR	120-277V	100/85/70w	30/35/40/50/65k
LED-RST-8FT-3M100W-5CCT-SR-BL	120-277V	100/85/70w	30/35/40/50/65k

Sensors for SR Models

Sensor Model	Description
S-AUD-PIR-1	PIR Bi-Level Motion + Daylight Sensor
S-AUD-PIR-BT	EnvisionLS Bluetooth Sensor
S-AUD-PIR-SL	SILVAIR Bluetooth Sensor
RST-SR	Sensor Receptacle (REQUIRED)



3M25		3M40	
WATT	LUMENS	WATT	LUMENS
15	2,100	20	2,600
20	2,800	30	3,900
25	3,500	40	5,200

3M60		3M80	
WATT	LUMENS	WATT	LUMENS
40	5,200	50	6,500
50	6,500	65	8,450
60	7,800	80	10,400

3M100	
WATT	LUMENS
70	9,100
85	11,050
100	13,000

4-CCT, White Finish

Model	Voltage	Watts	CCT
LED-RST-2FT-20W-4CCT	120-277V	20w	30/35/40/50k
LED-RST-4FT-3M80W-4CCT	120-277V	80/65/50w	30/35/40/50k
LED-RST-8FT-3M60W-4CCT	120-277V	60/50/40w	30/35/40/50k



4-CCT, Black Finish

Model	Voltage	Watts	CCT
LED-RST-2FT-20W-4CCT-BL	120-277V	20w	30/35/40/50k
LED-RST-4FT-3M40W-4CCT-BL	120-277V	40/30/20w	30/35/40/50k
LED-RST-8FT-3M60W-4CCT-BL	120-277V	60/50/40w	30/35/40/50k
LED-RST-8FT-3M100W-4CCT-BL	120-277V	100/85/70w	30/35/40/50k



Accessories for RST Fixtures

Model	Description
RST-SM-CN	Surface mount linkable bracket
RST-PDM-CN	Pendant mount linkable bracket
RST-2FT-WG	2ft long wire guard for 2ft RST
RST-4FT-WG	4ft long wire guard, use 2 pieces for 8ft
SK-10FT-Y-LC-PD	Suspension kit: 10' Y-shape, loop top, paddle bottom (adjustable length)
SK-20FT-Y-LC-PD	Suspension Kit: 20' Y-Shape, loop top, paddle bottom (adjustable length)

Factory Install Options	Description
Add: -EMB to Model #	90 minute emergency backup
Add: -BMS to Model #	Microwave bi level motion + daylight sensor
Add: -BMSPIR to Model #	PIR bi level motion + daylight sensor



RST-SR



RST-SM-CN



RST-PDM-CN



SK-10FT-Y-LC-PD
SK-20FT-Y-LC-PD



RST-2FT-WG
RST-4FT-WG



4' / 8' Mini Square LED Strip Fixtures

Plug & Play Linkable 150LM/W

- Seamless linkable connectors allows for multiple fixtures on one power source
- Link several fixtures together
- Sensors: Only one fixture with motion sensor is required when linking fixtures together. The sensor will activate all the fixtures. Place the fixture with sensor in desired order.
- Emergency: No additional wiring needed in EMB scenarios. Our patent pending connector allows for universal plug & play.

DLC LISTED ETL LISTED Box Qty. 6



Model	Voltage	Watts	CCT
LED-MSTL-4FT-3P40-5CCT-HL	120-277V	40/30/20w	27/30/35/40/50k
LED-MSTL-8FT-3P80-5CCT-HL	120-277V	80/60/40w	27/30/35/40/50k

3P40		3P80	
WATT	LUMENS	WATT	LUMENS
20	3,000	40	6,000
30	4,500	60	9,000
40	6,000	80	12,000




Seamless Linkable Connector

SK-10FT-Y-LC-PD
SK-20FT-Y-LC-PD

Accessory Model	Description
SK-10FT-Y-LC-PD	10' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
SK-20FT-Y-LC-PD	20' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
L6-BK-6P	10' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
L6-JBX	20' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
L6-5FT-PC-3P	MSTL: 5' Power Cord 3-Prong
L6-5FT-PC-LE	MSTL: 5' Power Cord Hardwire
L6-0.5FT-JUMPER	MSTL: 6" Jumper Cable
L6-2FT-JUMPER	MSTL: 2' Jumper Cable

Factory Install Options	Description
Add: -EMB to Model #	90 minute emergency backup
Add: -BMS to Model #	Microwave bi level motion + daylight sensor
Add: 20KV to model#	SG-20KV-UNV: 20KV Surge Protector



L6-JBX



L6-BK-6P



L6-2FT-JUMPER



L6-5FT-PC-LE



L6-5FT-PC-3P



2' / 4' LED Linear Corner Strip

5-CCT, 3-Power

DLC LISTED ETL LISTED

Box Qty for 2ft: 4
Box Qty for 4ft: 2



Model	Voltage	Watts	CCT
LED-RSCN-2FT-3P25-5CCT	120-277V	25/20/15w	27/30/35/40/50k
LED-RSCN-2FT-3P25-5CCT-BMS	120-277V	25/20/15w	27/30/35/40/50k
LED-RSCN-2FT-3P25-5CCT-EMB	120-277V	25/20/15w	27/30/35/40/50k
LED-RSCN-2FT-3P25-5CCT-BMS-EMB	120-277V	25/20/15w	27/30/35/40/50k
LED-RSCN-4FT-3P50-5CCT	120-277V	50/40/30w	27/30/35/40/50k
LED-RSCN-4FT-3P50-5CCT-BMS	120-277V	50/40/30w	27/30/35/40/50k
LED-RSCN-4FT-3P50-5CCT-EMB	120-277V	50/40/30w	27/30/35/40/50k
LED-RSCN-4FT-3P50-5CCT-BMS-EMB	120-277V	50/40/30w	27/30/35/40/50k

3P25		3P50	
WATT	LUMENS	WATT	LUMENS
15	1,850	30	3,900
20	2,600	40	5,200
25	3,250	50	6,500

Accessory Model	Description
Add '-EMB' to model #	Emergency backup (internal 8W)
Add '-BMS' to model #	Bi-level motion + daylight sensor
Add: -BMSPIR to Model #	PIR Bi Level Motion + Daylight Sensor
Add: -BMSBT to Model #	EnvisionLS Bluetooth Control: PIR/Daylight/Zoning
Add: -BMS-SIL to Model #	SILVAIR Enable Bluetooth Control: PIR/Daylight/Zoning/Monitoring
Add: 20KV to model#	SG-20KV-UNV: 20KV Surge Protector





Features a spring design allowing easy removal of lens for installation

Prismatic LED Wraps



Box Qty for 2ft: 12
Box Qty for 4ft: 6

Model	Voltage	Watts	Lumens	CCT
LED-WRP-PRM-2FT-20W-6CCT-UNV	120-277V	20w	2,300	27/30/35/40/50/65k
LED-WRP-PRM-4FT-40W-6CCT-UNV	120-277V	40w	4,600	27/30/35/40/50/65k



Model	Voltage	Watts	Lumens	CCT
LED-WRP-PRM-2FT-20W-35K	120-277V	40w	1,900	3500k
LED-WRP-PRM-2FT-20W-40K	120-277V	20w	1,900	4000k
LED-WRP-PRM-2FT-20W-50K	120-277V	20w	1,900	5000k
LED-WRP-PRM-4FT-40W-35K	120-277V	40w	3,800	3500k

Accessory Model	Description
Add '-EMB' to model #	Emergency backup (internal 8W)
Add '-BMS' to model #	Bi-level motion + daylight sensor
Add: -BMSPIR to Model #	PIR Bi Level Motion + Daylight Sensor
Add: -BMSBT to Model #	EnvisionLS Bluetooth Control: PIR/Daylight/Zoning
Add: -BMS-SIL to Model #	SILVAIR Enable Bluetooth Control: PIR/Daylight/Zoning/Monitoring
Add: 20KV to model#	SG-20KV-UNV: 20KV Surge Protector



Frosted LED Wraps



Box Qty for 2ft: 12
Box Qty for 4ft: 6

3P24		3P48	
WATT	LUMENS	WATT	LUMENS
16	1,840	32	3,680
20	2,300	40	4,600
24	2,760	48	5,520

Model	Voltage	Watts	CCT
LED-WRP-FR-2FT-3P24-6CCT-UNV	120-277V	24/20/16w	27/30/35/40/50/65k
LED-WRP-FR-4FT-3P48-6CCT-UNV	120-277V	48/40/32w	27/30/35/40/50/65k



Model	Voltage	Watts	Lumens	CCT
LED-WRP-FR-2FT-20W-50K	120-277V	20w	2,200	5000k

Accessory Model	Description
Add '-EMB' to model #	Emergency backup (internal 8W)
Add '-BMS' to model #	Bi-level motion + daylight sensor
Add: -BMSPIR to Model #	PIR Bi Level Motion + Daylight Sensor
Add: -BMSBT to Model #	EnvisionLS Bluetooth Control: PIR/Daylight/Zoning
Add: -BMS-SIL to Model #	SILVAIR Enable Bluetooth Control: PIR/Daylight/Zoning/Monitoring
Add: 20KV to model#	SG-20KV-UNV: 20KV Surge Protector



1/2" Knockout



**2' & 4' LED Wrap: ARCY
9.8" Wide Models**



Box Qty for 2ft: 6
Box Qty for 4ft: 4

Model	Voltage	Watts	CCT
LED-WRP-ARC-10ix2FT-3P25-5CCT	120-277V	25/20/15w	30/35/40/50/65k
LED-WRP-ARC-10ix4FT-3P50-5CCT	120-277V	50/40/30w	30/35/40/50/65k



14" Wide Models





Box Qty for 2ft: 6
Box Qty for 4ft: 4

Model	Voltage	Watts	CCT
LED-WRP-ARC-14ix2FT-3P25-5CCT	120-277V	25/20/15w	30/35/40/50/65k
LED-WRP-ARC-14ix4FT-3P50-5CCT	120-277V	50/40/30w	30/35/40/50/65k



10ix2FT		10ix4FT	
WATT	LUMENS	WATT	LUMENS
15	1,850	30	3,900
20	2,600	40	5,200
25	3,250	50	6,500

Accessory Model	Description
Add '-EMB' to model #	Emergency backup (internal 8W)
Add '-BMS' to model #	Bi-level motion + daylight sensor
Add: -BMSPIR to Model #	PIR Bi Level Motion + Daylight Sensor
Add: -BMSBT to Model #	EnvisionLS Bluetooth Control: PIR/Daylight/Zoning
Add: -BMS-SIL to Model #	SILVAIR Enable Bluetooth Control: PIR/Daylight/Zoning/Monitoring
Add: 20KV to model#	SG-20KV-UNV: 20KV Surge Protector

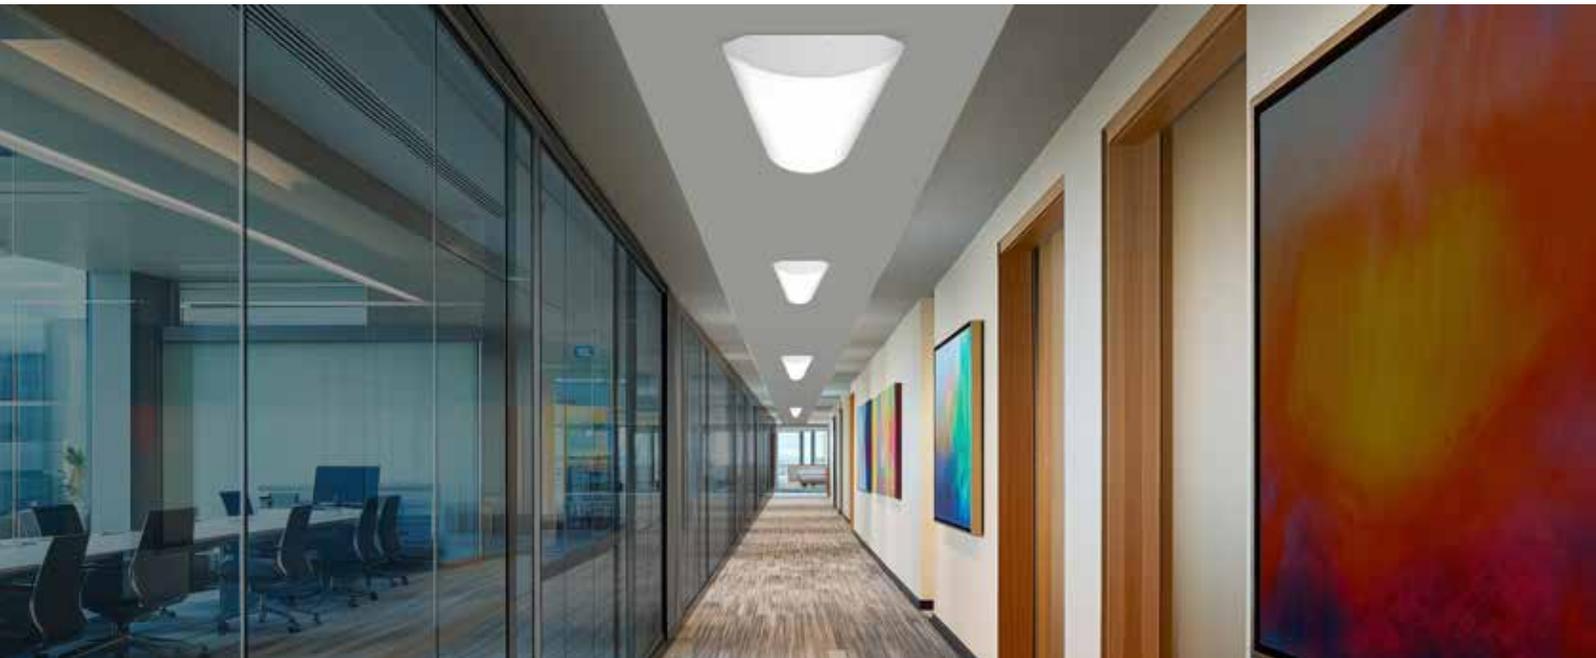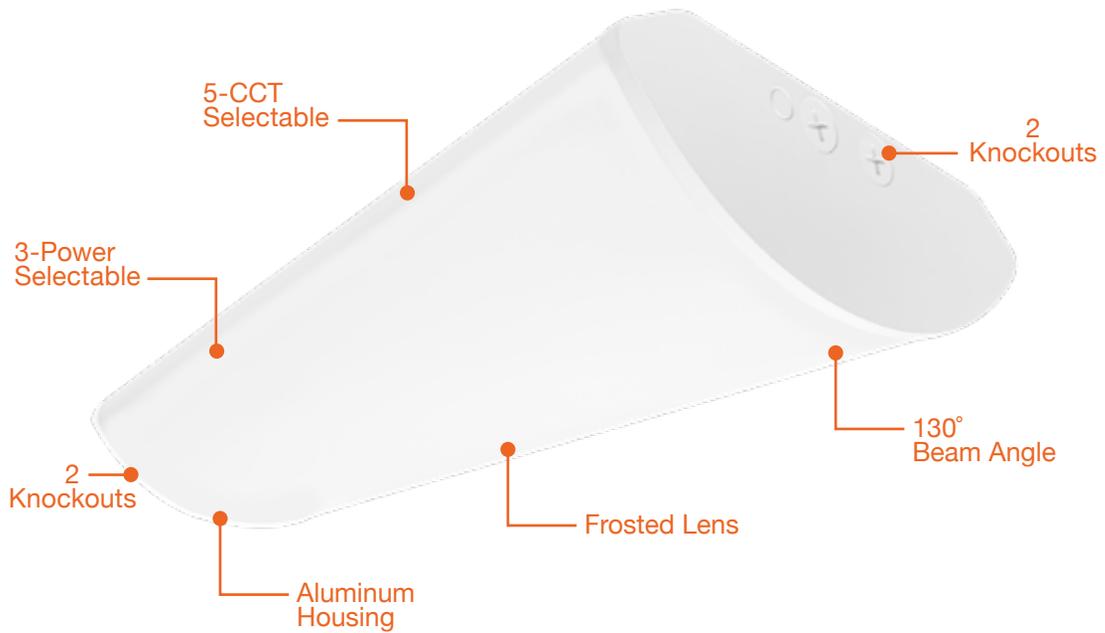



Vapor Tight LED: Bolt 5-CCT, 3-Power

Box Qty:
3M25 - 12
3M50 - 6
3M80 - 6
3M100 - 4



5-CCT			
WATT	LUMENS	WATT	LUMENS
15	2,250	50	7,500
20	3,000	60	9,000
25	3,750	70	10,500
30	4,500	80	12,000
40	6,000	100	15,000

4-CCT	
WATT	LUMENS
15	1,950
20	2,600
25	3,250
60	7,800
70	9,100
80	10,400

Model	Voltage	Watts	CCT
LED-VPT-2FT-3P25-5CCT-UNV	120-277V	25/20/15w	30/35/40/50/65k
LED-VPT-4FT-3P50-5CCT-UNV	120-277V	50/40/30w	30/35/40/50/65k
LED-VPT-4FT-3P80-5CCT-UNV	120-277V	80/70/60w	30/35/40/50/65k
LED-VPT-8FT-3P100-5CCT-UNV	120-277V	100/80/60w	30/35/40/50/65k

Model	Description
VPT-2FT-WG	2ft Long Wire Guard for 2ft RST
VPT-4FT-WG	4ft Long Wire Guard for 4, 8ft RST




4' Green Vapor Tight LED Fixture: Bolt

Model	Voltage	Watts	Lumens	CCT
LED-VPT-4FT-80W-GREEN	120-277V	80w	4200	Green

Factory Install Options	Description
Add: -EMB to Model #	90 minute emergency backup
Add: -BMS to Model #	HD407VC-R Bi level motion + daylight sensor
Add: 20KV to Model #	SG-20KV-UNV: 20KV surge protector
Add: -HV to Model #	347-480V step down transformer

Model	Description
VPT-ANGLE	Angle Mount Accessory

Model	Description
VPT-2FT-WG	2ft Long Wire Guard for 2ft RST
VPT-4FT-WG	4ft Long Wire Guard for 4, 8ft RST

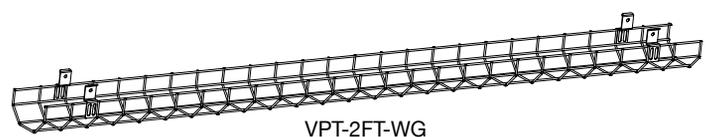

VPT-2FT-WG
VPT-4FT-WG

Jelly Jar Vapor Tight / Vertical & Horizontal: Bolt - 3-CCT

Box Qty.
12



Model	Voltage	Watts	Lumens	CCT
LED-JJ-21W-TRI	120-277V	21w	2700	30/40/50k



Vertical



Horizontal



3-CCT
Selectable





1" Low Voltage Downlights: Mini

 Box Qty. 18

Model	Voltage	Watts	Lumens	CCT
LED-MDL-1-6W-30K-RD-WH-12V	12V	6w	500	3000k

Accessory Model	Description
MDL-TRIM-RD-BLK	1" mini downlight round black trim
MDL-TRIM-RD-BZ	1" mini downlight round bronze trim
MDL-TRIM-SQ-WH	1" mini downlight square white trim
MDL-TRIM-SQ-BLK	1" mini downlight square black trim
MDL-TRIM-SQ-BZ	1" mini downlight square bronze trim
MDL-24°-Beam	1" mini downlight Beam lens 24°



1" Low Voltage Downlight Adjustable: Mini

 Box Qty. 18

Model	Voltage	Watts	Beam	Dimming	CCT
LED-MDL-1-ADJ-6W-30K-RD-WH-12V	12V	6w	38°	Triac/ELV	27/30/35/40/50k
LED-MDL-1-ADJ-6W-30K-RD-BLK-12V	12V	6w	38°	Triac/ELV	27/30/35/40/50k
LED-MDL-1-ADJ-6W-30K-RD-BZ-12V	12V	6w	38°	Triac/ELV	27/30/35/40/50k
LED-MDL-1-ADJ-6W-30K-SQ-WH-12V	12V	6w	38°	Triac/ELV	27/30/35/40/50k
LED-MDL-1-ADJ-6W-30K-SQ-BLK-12V	12V	6w	38°	Triac/ELV	27/30/35/40/50k
LED-MDL-1-ADJ-6W-30K-SQ-BZ-12V	12V	6w	38°	Triac/ELV	27/30/35/40/50k

WATT	LUMENS
6	500



Box Qty.
18

LED Downlights: Trimless - Round

Model	Voltage	Watts	Beam	Dimming	CCT
LED-DLJBX-TML-2R-8W-5CCT-WH	120V	8w	38°	Triac/ELV	27/30/35/40/50k
LED-DLJBX-TML-2R-8W-5CCT-BLK	120V	8w	38°	Triac/ELV	27/30/35/40/50k
LED-DLJBX-TML-2R-15W-5CCT-WH	120V	15w	38°	Triac/ELV	27/30/35/40/50k
LED-DLJBX-TML-2R-15W-5CCT-BLK	120V	15w	38°	Triac/ELV	27/30/35/40/50k



2R-8W		2R-15W	
WATT	LUMENS	WATT	LUMENS
8	600	15	1,500



Factory Install Options	Description
Add: -24D to Model #	24D Beam
Add: -60D to Model #	60D Beam

LED Downlights: Trimless - Round Gimbal

Box Qty.
18

Model	Voltage	Watts	Beam	Dimming	CCT
LED-DLJBX-TML-GMB-2R-8W-5CCT-WH	120V	8w	38°	Triac/ELV	27/30/35/40/50k
LED-DLJBX-TML-GMB-2R-8W-5CCT-BLK	120V	8w	38°	Triac/ELV	27/30/35/40/50k



WATT	LUMENS
8	600

LED Downlight: Trimless-Line - Round

Box Qty.
18

Model	Voltage	Watts	Beam	Dimming	CCT
LED-DLJBX-TML-4R-15W-5CCT-WH	120V	15w	38°	Triac/ELV	27/30/35/40/50k
LED-DLJBX-TML-4R-15W-5CCT-BLK	120V	15w	38°	Triac/ELV	27/30/35/40/50k



WATT	LUMENS
15	1,000

LED Downlights: Trimless - Square

Box Qty.
18

Model	Voltage	Watts	Beam	Dimming	CCT
LED-DLJBX-TML-2SQ-8W-5CCT-WH	120V	8w	38°	Triac/ELV	27/30/35/40/50k
LED-DLJBX-TML-2SQ-8W-5CCT-BLK	120V	8w	38°	Triac/ELV	27/30/35/40/50k
LED-DLJBX-TML-2SQ-15W-5CCT-WH	120V	15w	38°	Triac/ELV	27/30/35/40/50k
LED-DLJBX-TML-2SQ-15W-5CCT-BLK	120V	15w	38°	Triac/ELV	27/30/35/40/50k



2SQ-8W		2SQ-15W	
WATT	LUMENS	WATT	LUMENS
8	600	15	1,500

LED Downlights: Trimless - Square

Box Qty.
18

Model	Voltage	Watts	Beam	Dimming	CCT
LED-DLJBX-TML-4SQ-15W-5CCT-WH	120V	15w	38°	Triac/ELV	27/30/35/40/50k
LED-DLJBX-TML-4SQ-15W-5CCT-BLK	120V	15w	38°	Triac/ELV	27/30/35/40/50k



WATT	LUMENS
15	1,000

Beam Lens Options

Accessory	Description
OPTIC-35X17-24D	60D Optic: DLJBX-2, DLJBX-TML-2
OPTIC-35X17-60D	60D Optic: DLJBX-2, DLJBX-TML-2
OPTIC-63X22-24D	24D Optic:DLJBX-4RG, SL-FLT-4R, DLJBX-TML-4
OPTIC-63X22-60D	60D Optic:DLJBX-4RG, SL-FLT-4R, DLJBX-TML-4

Factory Install Options	Description
Add: -60D to Model #	60D Beam
Add: -24D to Model #	24D Beam
Add: -EMB to Model #	90 Minute Emergency Backup



3" LED J-Box Canless Downlight: M - 5-CCT

JAB TITLE 24 COMPLIANT **Box Qty. 18**

Model	Voltage	Watts	Beam	Dimming	CCT
LED-MDJBX-3-10W-5CCT-WH-R	120V	10w	110°	Triac/ELV	27/30/35/40/50k



WATT	LUMENS
10	800

Accessory	Description
MDJBX-3-TRIM-WH-SQ	MDJBX-3: White square smooth trim
MDJBX-3-TRIM-BLK-R	MDJBX-3: Black round smooth trim
MDJBX-3-TRIM-BLK-SQ	MDJBX-3: Black square smooth trim

Factory Install Options	Description
Add '-EMB-' to model #	Emergency backup (external 15W)



White (-WH-SQ)



Black (-BLK-R)



Black (-BLK-SQ)



4" LED J-Box Canless Downlight: M - 5-CCT

JAB TITLE 24 COMPLIANT **Box Qty. 18**

Model	Voltage	Watts	Beam	Dimming	CCT
LED-MDJBX-4-15W-5CCT-WH-R	120V	15w	110°	Triac/ELV	27/30/35/40/50k



WATT	LUMENS
15	1,300

Accessory	Description
MDJBX-4-TRIM-WH-SQ	MDJBX-3: White square smooth trim
MDJBX-4-TRIM-BLK-R	MDJBX-3: Black round smooth trim
MDJBX-4-TRIM-BLK-SQ	MDJBX-3: Black square smooth trim

Factory Install Options	Description
Add '-EMB-' to model #	Emergency backup (external 15W)



White (-WH-SQ)



Black (-BLK-R)



Black (-BLK-SQ)





1" LED Canless Downlight: SnapTrim - 5-CCT

JAB TITLE 24 COMPLIANT Box Qty. 24



Model	Voltage	Watts	Beam	Dimming	CCT
LED-DLJBX-1RG-7W-5CCT-WH-R	120V	7w	38°	Triac/ELV	27/30/35/40/50k

WATT	LUMENS
7	550

Trim Options

Accessory	Description
DLJBX-1-TRIM-WH-SQ	1" White square smooth trim
DLJBX-1-TRIM-BLK-R	1" Black round smooth trim
DLJBX-1-TRIM-BLK-SQ	1" Black square smooth trim



2" LED Canless Downlight: SnapTrim - 5-CCT

Box Qty. 18



Model	Voltage	Watts	Beam	Dimming	CCT
LED-DLJBX-2-8W-5CCT-W/W-SM	120V	8w	38°	Triac/ELV	27/30/35/40/50k
LED-DLJBX-2-15W-5CCT-W/W-S	120V	15w	38°	Triac/ELV	27/30/35/40/50k
LED-DLJBX-2-15W-5CCT-W/W-S-0/10V	120V	15w	38°	Triac/ELV	27/30/35/40/50k
LED-DLJBX-2-15W-30K-W/W-S	120V	15w	38°	Triac/ELV	27/30/35/40/50k
LED-DLJBX-2-15W-50K-W/W-S	120V	15w	38°	Triac/ELV	27/30/35/40/50k

2-8W		2-15W	
WATT	LUMENS	WATT	LUMENS
8	600	15	1,000



Warm Dimming



Box Qty. 18

Model	Voltage	Watts	Beam	Dimming	CCT
LED-DLJBX-2-6W-3WD-W/W-S	120V	6w	38°	Triac/ELV	30—>18k
LED-DLJBX-2-12W-3WD-W/W-S	120V	12w	38°	Triac/ELV	30—>18k

2-6W		2-12W	
WATT	LUMENS	WATT	LUMENS
6	450	12	850



Select-Fire Rated

Box Qty. 18



Model	Voltage	Watts	Beam	Dimming	CCT
LED-DLJBX-2-8W-5CCT-FR-WW-SM	120V	8w	38°	Triac/ELV	27/30/35/40/50k


WATT	LUMENS
8	600



White (-WH-S) Included (-WH-BFL)
 Black (-BLK-S) (BLK-BFL)
 Bronze (-BZ-S) (BZ-BFL)
 Chrome (-CH-S)
 Nickel (-BN-S)
 White (-WH-S) (WH-BFL)
 Black (-BLK-S) (BLK-BFL)
 Bronze (-BZ-S) (BZ-BFL)
 Nickel (-BN-S)

Trim Options

Accessory	Description
DLJBX-2-TRIM-BLK-S	2" Black in and out smooth trim
DLJBX-2-TRIM-BL-BFL	2" Black in and out baffle trim
DLJBX-2-TRIM-BZ-S	2" Bronze in and out smooth trim
DLJBX-2-TRIM-BZ-BFL	2" Bronze in and out baffle trim
DLJBX-2-TRIM-BN-S	2" Brushed nickel in and out smooth trim
DLJBX-2-TRIM-CH-S	2" Chrome in and out smooth trim
DLJBX-2-TRIM-WH-BFL	2" White in and out baffle trim
DLJBX-2-TRIM-BN-S-SQ	2" Brushed nickel smooth square trim
DLJBX-2-TRIM-BL-S-SQ	2" Black smooth square trim
DLJBX-2-TRIM-BZ-S-SQ	2" Bronze smooth square trim
DLJBX-2-TRIM-WH-S-SQ	2" White smooth square trim

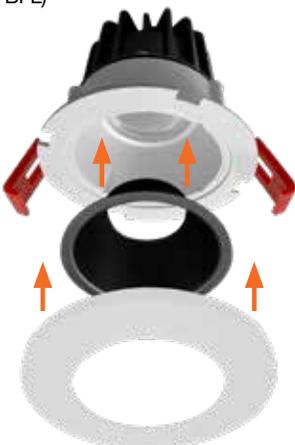



2" LED Adjustable Downlight: SnapTrim - 5-CCT

JA8 TITLE 24 COMPLIANT **Box Qty. 18**

Model	Voltage	Watts	Beam	Dimming	CCT
LED-DLJBX-ADJ-2-5W-5CCT-WH	120V	5w	38°	Triac/ELV	27/30/35/40/50k



WATT	LUMENS
5	350

12V Version

Use Electronic Low Voltage drivers see CV series

Box Qty. 18

Model	Voltage	Watts	Beam	Dimming	CCT
LED-DLJBX-ADJ-2-5W-30K-WH-12V	120V	5w	38°	Triac/ELV	3000k
LED-DLJBX-ADJ-2-5W-30K-BLK-12V	120V	5w	38°	Triac/ELV	3000k

WATT	LUMENS
5	350

120V Version

Box Qty. 18

Model	Voltage	Watts	Beam	Dimming	CCT
LED-DLJBX-ADJ-2-5W-27K	120V	5w	38°	Triac/ELV	3000k
LED-DLJBX-ADJ-2-5W-40K	120V	5w	38°	Triac/ELV	3000k
LED-DLJBX-ADJ-2-5W-50K	120V	5w	38°	Triac/ELV	3000k

WATT	LUMENS
5	350

Accessory	Description
JBX-EXT-6'-2PIN	6' extension cable for fixture to J-box
JBX-EXT-10'-2PIN	10' extension cable for fixture to J-box



3" LED Adjustable Downlight: SnapTrim - 5-CCT

JA8 TITLE 24 COMPLIANT **Box Qty. 18**

Model	Voltage	Watts	Beam	Dimming	CCT
LED-DLJBX-ADJ-3-8W-5CCT-WH-R	120V	8w	38°	Triac/ELV	27/30/35/40/50k
LED-DLJBX-ADJ-3-8W-5CCT-BLK-R	120V	8w	38°	Triac/ELV	27/30/35/40/50k
LED-DLJBX-ADJ-3-12W-5CCT-WH-R	120V	12w	38°	Triac/ELV	27/30/35/40/50k
LED-DLJBX-ADJ-3-12W-5CCT-BLK-R	120V	12w	38°	Triac/ELV	27/30/35/40/50k



3-8W		3-12W	
WATT	LUMENS	WATT	LUMENS
8	600	12	1,000

Warm Dimming

WARM DIMMING **Box Qty. 18**

Model	Voltage	Watts	Beam	Dimming	CCT
LED-DLJBX-ADJ-3-6W-3WD-WH-R	120V	6w	38°	Triac/ELV	30—>18k
LED-DLJBX-ADJ-3-6W-3WD-BLK-R	120V	6w	38°	Triac/ELV	30—>18k

WATT	LUMENS
6	450



White (-WH-S) Included **Nickel (-BN-S)** **White (-WH-SQ)** **Black (-BLK-SQ)** **Nickel (-BN-SQ)**

Trim Options

Accessory	Description
DLJBX-ADJ-3-TRIM-WH-SQ	3" Gimbal square trim white finish
DLJBX-ADJ-3-TRIM-BN-R	3" Gimbal round trim brushed nickel
DLJBX-ADJ-3-TRIM-BN-SQ	3" Gimbal square trim brushed nickel
DLJBX-ADJ-3-TRIM-BLK-SQ	3" Gimbal square trim black finish



3" Regressed Gimbal Downlight: SnapTrim - 5-CCT

JAB TITLE 24 COMPLIANT Box Qty. 18

Model	Voltage	Watts	Beam	Dimming	CCT
LED-DLJBX-ADJ-3RG-8W-5CCT-WH-R	120V	8w	38°	Triac/ELV	27/30/35/40/50k
LED-DLJBX-ADJ-3RG-8W-5CCT-BLK-R	120V	8w	38°	Triac/ELV	27/30/35/40/50k
LED-DLJBX-ADJ-3RG-8W-5CCT-WH-SQ	120V	8w	38°	Triac/ELV	27/30/35/40/50k
LED-DLJBX-ADJ-3RG-8W-5CCT-BLK-SQ	120V	8w	38°	Triac/ELV	27/30/35/40/50k



WATT	LUMENS
8	600

Factory Add-Ons	Description
Add: -EMB to Model #	90 Minute Emergency Backup

Floating Adjustable: SnapTrim - 5-CCT

JAB TITLE 24 COMPLIANT Box Qty. 18

Model	Voltage	Watts	Beam	Dimming	CCT
LED-SL-FLT-2-5W-5CCT-WH	120V	5w	38°	Triac/ELV	27/30/35/40/50k
LED-SL-FLT-2-5W-5CCT-BLK	120V	5w	38°	Triac/ELV	27/30/35/40/50k



WATT	LUMENS
5	400

4"

Box Qty. 18

Model	Voltage	Watts	Beam	Dimming	CCT
LED-SL-FLT-4R-9W-5CCT-WH	120V	9w	38°	Triac/ELV	27/30/35/40/50k
LED-SL-FLT-4R-9W-5CCT-WH-UNV	120-277V	9w	38°	0-10V	27/30/35/40/50k



WATT	LUMENS
9	700

6"

Box Qty. 18

Model	Voltage	Watts	Beam	Dimming	CCT
LED-SL-FLT-6R-13W-5CCT-WH	120V	13w	38°	Triac/ELV	27/30/35/40/50k
LED-SL-FLT-6R-13W-5CCT-WH-UNV	120-277V	13w	38°	0-10V	27/30/35/40/50k



WATT	LUMENS
13	1,000

4"- Fire-Rated

Box Qty. 18

Model	Voltage	Watts	Beam	Dimming	CCT
LED-SL-FLT-4R-9W-5CCT-FR-WH	120V	9w	38°	Triac/ELV	27/30/35/40/50k



WATT	LUMENS
9	700



Factory Add-Ons	Description
Add: -EMB to Model #	90 Minute Emergency Backup

4" Round Scoop Downlight: SnapTrim - 5-CCT

Box Qty. 18

Model	Voltage	Watts	Beam	Dimming	CCT
LED-SL-SCP-4R-12W-5CCT-WH	120V	12w	38°	Triac/ELV	27/30/35/40/50k



WATT	LUMENS
12	900

Factory Add-Ons	Description
Add: -EMB to Model #	90 Minute Emergency Backup

4" Adjustable Sloped Ceiling: SnapTrim - 5-CCT

JAB TITLE 24 COMPLIANT Box Qty. 18

Model	Voltage	Watts	Beam	Dimming	CCT
LED-SL-SLP-ADJ-4R-8W-5CCT-WH	120V	8w	38°	Triac/ELV	27/30/35/40/50k
LED-SL-SLP-ADJ-4R-8W-5CCT-BLK	120V	8w	38°	Triac/ELV	27/30/35/40/50k



WATT	LUMENS
8	600

Factory Add-Ons	Description
Add: -EMB to Model #	90 Minute Emergency Backup

3" Regressed Downlight: SnapTrim - 5-CCT

Model	Voltage	Watts	Beam	Dimming	CCT
LED-DLJBX-3RG-15W-5CCT-WH-R	120V	15w	38°	Triac/ELV	27/30/35/40/50k

WATT	LUMENS
15	1,100

Accessory	Description
DLJBX-3RG-TRIM-WH-SQ	3" Regressed white square trim
DLJBX-3RG-TRIM-BLK-R	3" Regressed black round trim
DLJBX-3RG-TRIM-BLK-SQ	3" Regressed black square trim
Add '-EMB-' to model #	Emergency backup (external 25W)



4" Regressed Downlight: SnapTrim - 5-CCT

Box Qty. 18

Model	Voltage	Watts	Beam	Dimming	CCT
LED-DLJBX-4RG-18W-5CCT-WH-R	120V	18w	38°	Triac/ELV	27/30/35/40/50k
LED-DLJBX-4RG-15W-5CCT-WH-R	120V	15w	38°	Triac/ELV	27/30/35/40/50k
LED-DLJBX-4RG-15W-5CCT-WH-R-0/10V	120-277V	15w	38°	Triac/ELV	27/30/35/40/50k

4RG-18W		4RG-15W	
WATT	LUMENS	WATT	LUMENS
18	1500	15	1,100

5-CCT Select - Fire Rated

Box Qty. 18

Model	Voltage	Watts	Beam	Dimming	CCT
LED-DLJBX-4RG-15W-5CCT-FR-WH-R	120V	15w	38°	Triac/ELV	27/30/35/40/50k

WATT	LUMENS
15	1,100



Warm Dimming




Box Qty. 18

Model	Voltage	Watts	Beam	Dimming	CCT
LED-DLJBX-4RG-12W-3WD-WH-R	120V	12w	38°	Triac/ELV	30—>18k

WATT	LUMENS
12	850

Accessory	Description
Add '-EMB-' to model #	Emergency backup (external 25W)
DLJBX-4RG-TRIM-WH-SQ	4" Regressed gimbal white square trim
DLJBX-4RG-TRIM-BLK-R	4" Regressed gimbal black round trim
DLJBX-4RG-TRIM-BLK-SQ	4" Regressed gimbal black square trim
DLJBX-4RG-TRIM-BRZ-R	4" Regressed gimbal bronze round trim
DLJBX-4RG-TRIM-BRZ-SQ	4" Regressed gimbal bronze square trim




6" Regressed Downlight: SnapTrim - 5-CCT

Box Qty. 18

Model	Voltage	Watts	Beam	Dimming	CCT
LED-DLJBX-6RG-24W-5CCT-WH-R	120V	24w	38°	Triac/ELV	27/30/35/40/50k

WATT	LUMENS
24	1800

Accessory	Description
Add '-EMB-' to model #	Emergency backup (external 25W)
DLJBX-6RG-TRIM-WH-SQ	6" regressed gimbal white square trim
DLJBX-6RG-TRIM-BLK-R	6" regressed gimbal black round trim
DLJBX-6RG-TRIM-BLK-SQ	6" regressed gimbal black square trim



4" Adjustable Downlight: SnapTrim - 5-CCT

JA8
TITLE 24
COMPLIANT

Box Qty.
18



Model	Voltage	Watts	Beam	Dimming	CCT
LED-DLJBX-ADJ-4-12W-5CCT-WH-R	120V	12w	38°	Triac/ELV	27/30/35/40/50k
LED-DLJBX-ADJ-4-12W-5CCT-BLK-R	120V	12w	38°	Triac/ELV	27/30/35/40/50k
LED-DLJBX-ADJ-4-12W-5CCT-BN-R	120V	12w	38°	Triac/ELV	27/30/35/40/50k
LED-DLJBX-ADJ-4-18W-5CCT-WH-R	120V	18w	38°	Triac/ELV	27/30/35/40/50k
LED-DLJBX-ADJ-4-18W-5CCT-BLK-R	120V	18w	38°	Triac/ELV	27/30/35/40/50k

4-12W		4-18W	
WATT	LUMENS	WATT	LUMENS
12	750	18	1500

Warm Dimming



Box Qty.
18

Model	Voltage	Watts	Beam	Dimming	CCT
LED-DLJBX-ADJ-4-12W-3WD-WH-R	120V	18w	38°	Triac/ELV	30—>18k

WATT	LUMENS
18	750

Accessory	Description
JBX-EXT-6'-2PIN	6" Extension cable for fixture to J-box unit
JBX-EXT-10'-2PIN	10" Extension cable for fixture to J-box unit
Add '-EMB' to model #	Emergency backup (external 25W)



Display featuring 10 of our canless downlights. Place a \$3,000+ stock orders of downlights and get a free counter display.

Display

6" Adjustable Downlight: SnapTrim - 5-CCT

Box Qty.
18



Model	Voltage	Watts	Beam	Dimming	CCT
LED-DLJBX-ADJ-6-18W-5CCT-WH-R	120V	18w	38°	Triac/ELV	27/30/35/40/50k
LED-DLJBX-ADJ-6-18W-5CCT-BLK-R	120V	18w	38°	Triac/ELV	27/30/35/40/50k

WATT	LUMENS
18	1500

Accessory	Description
Add: -24D to Model #	24D Beam
Add: -60D to Model #	60D Beam
Add '-EMB' to model #	Emergency backup (external 25W)

Beam Lens Options

Accessory	Description
OPTIC-35X17-24D	60D Optic: DLJBX-2, DLJBX-TML-2
OPTIC-35X17-60D	60D Optic: DLJBX-2, DLJBX-TML-2
OPTIC-42X14-24D	24D Optic: DLJBX-ADJ-3, ADJ-3RG, SLP-ADJ-4R, TML-GMB-2R, SCP-4R
OPTIC-42X14-60D	60D Optic: DLJBX-ADJ-3, ADJ-3RG, SLP-ADJ-4R, TML-GMB-2R, SCP-4R
OPTIC-50X17-24D	24D Optic:DLJBX-3RG
OPTIC-50x17-60D	60D Optic:DLJBX-3RG
OPTIC-63X22-24D	24D Optic:DLJBX-4RG, SL-FLT-4R, DLJBX-TML-4,
OPTIC-63X22-60D	60D Optic:DLJBX-4RG, SL-FLT-4R, DLJBX-TML-4,




4" Slim Panel Tilt Downlight: SnapTrim - 5-CCT

JAB
TITLE 24
COMPLY
Box Qty.
18

Model	Voltage	Watts	Beam	Dimming	CCT
LED-SL-TLAT-4R-10W-5CCT-WH	120V	10w	110°	Triac/ELV	27/30/35/40/50k
LED-SL-TLAT-4R-10W-5CCT-BL	120V	10w	110°	Triac/ELV	27/30/35/40/50k

TLAT-4R	
WATT	LUMENS
10	820

Factory Install Options	Description
Add '-EMB' to model #	Emergency backup (external 25W)

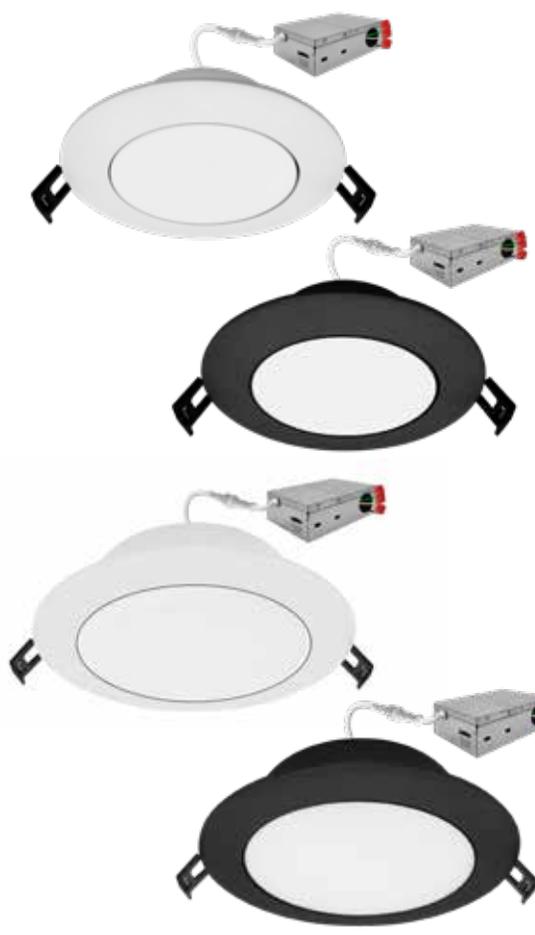

6" Slim Panel Tilt Downlight: SnapTrim - 5-CCT

Box Qty.
18

Model	Voltage	Watts	Beam	Dimming	CCT
LED-SL-TLAT-6R-13W-5CCT-WH	120V	13w	110°	Triac/ELV	27/30/35/40/50k
LED-SL-TLAT-6R-13W-5CCT-BL	120V	13w	110°	Triac/ELV	27/30/35/40/50k

TLAT-6R	
WATT	LUMENS
13	1100

Factory Install Options	Description
Add '-EMB' to model #	Emergency backup (external 25W)



3-CCT Select

Box Qty.
18

Model	Voltage	Watts	Beam	Dimming	CCT
LED-SL-TLT-6R-12W-TRI	120V	12w	110°	Triac/ELV	30/40/50k

WATT	LUMENS
12	800




6' / 10' Extension Cable

Canless LED Downlight Accessories

Accessory	Description
CUNV-NC-ICAT-7H	1" / 2" / 3" / 3.5" / 4" / 6" Universal pre-mounting new construction plate
CUNV-NC-ICAT-6SQ	1" 2 3.5" 4" 5" 6" Canless downlights (only for trimless squares) new construction plate
CUNV-JBX-RI-XL	2" 3" 3.5" 4" 5" 6" Universal construction plate canless downlights
C4-JBX-RI	4" Rough in plate
C6-JBX-RI	6" Rough in plate
C8-JBX-RI	8" Rough in plate
JBX-EXT-6'-2PIN	6' Extension cable for fixture to J-box
JBX-EXT-10'-2PIN	10' Extension cable for fixture to J-box
JBX-EXT-12'-2PIN	12' Extension cable for fixture to J-box
JBX-EXT-6'-TRI	6' Extension cable for fixture to J-box
JBX-EXT-10'-TRI	10' Extension cable for fixture to J-box
LED-EMB-25W-HV-0/10V	Emergency Back Up For Internal Drivers (Works with all 0-10V Dim or <25W fixtures) -Single Sided Flex-




CUNV-NC-ICAT-7H
Universal Pre-Mounting Plate
13 7/8" x 15 1/8"




CUNV-NC-ICAT-6SQ
Universal Pre-Mounting Plate
14" x 13.75"



CUNV-JBX-RI-XL
Universal Pre-Mounting Plate
26" x 8.4"



C4-JBX-RI
4" Rough In Plate
6 1/2" x 13 1/4"



C6-JBX-RI
6" Rough In Plate
8 1/2" x 17 1/4"



C8-JBX-RI
8" Rough In Plate
10 1/2" x 26"



3" Slim Panel Downlight: SnapTrim - 5-CCT

JAB TITLE 24 COMPLIANT **Box Qty. 18**

Model	Voltage	Watts	Beam	Dimming	CCT
LED-SL-PNL-3R-8W-5CCT-WH	120V	8w	110°	Triac/ELV	27/30/35/40/50k
LED-SL-PNL-3SQ-8W-5CCT-WH	120V	8w	110°	Triac/ELV	27/30/35/40/50k



WATT	LUMENS
8	500



4" Slim Panel Downlight: SnapTrim - 5-CCT

Box Qty. 18

Model	Voltage	Watts	Beam	Dimming	CCT
LED-SL-PNL-4R-3P12W-5CCT-WH	120V	8/10/12w	110°	Triac/ELV	27/30/35/40/50k
LED-SL-PNL-4SQ-3P12W-5CCT-WH	120V	8/10/12w	110°	Triac/ELV	27/30/35/40/50k
LED-SL-PNL-4R-9W-5CCT-12V	120V	9w	110°	0-10V	27/30/35/40/50k
LED-SL-PNL-4R-9W-5CCT-24V	24V	9w	110°	Triac/ELV	27/30/35/40/50k
NEW LED-SL-PNL-4R-3P12-5CCT-UNV	120-277V	12/9/7w	110°	Triac/ELV	27/30/35/40/50k
LED-SL-PNL-4R-11W-5CCT-0/10V	120V	11w	110°	0-10V	27/30/35/40/50k
LED-SL-PNL-4SQ-11W-5CCT-0/10V	120-277V	11w	110°	0-10V	27/30/35/40/50k
LED-SL-PNL-4R-11W-TRI-0/10V	120-277V	11w	110°	0-10V	30/40/50k



4R/4SQ-3P12W		4R-9W-12/24W		4R-3P12W-UNV		4R/4SQ-11W	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
8	500	9	750	7	600	11	750
10	700			9	800		
12	840			12	1,000		

Fire Rated

Box Qty. 18

Model	Voltage	Watts	Beam	Dimming	CCT
LED-SL-PNL-4R-12W-5CCT-FR-WH	120V	12w	110°	Triac/ELV	27/30/35/40/50k
LED-SL-PNL-4SQ-12W-5CCT-FR-WH	120V	12w	110°	Triac/ELV	27/30/35/40/50k



WATT	LUMENS
12	840



Pre-Installed Accessory	Description
Add '-EMB' to model #	Emergency backup (external 25W)



6" Slim Panel Downlight: SnapTrim - 5-CCT

JAB TITLE 24 COMPLIANT **Box Qty. 18**

Model	Voltage	Watts	Beam	Dimming	CCT
LED-SL-PNL-6R-3P15W-5CCT-WH	120V	15/12/9w	110°	Triac/ELV	27/30/35/40/50k
NEW LED-SL-PNL-6R-3P17-5CCT-UNV	120-277V	17/12/9w	110°	0-10V	27/30/35/40/50k
LED-SL-PNL-6SQ-3P15W-5CCT-WH	120V	15/12/9w	110°	Triac/ELV	27/30/35/40/50k
LED-SL-PNL-6SQ-15W-5CCT-WH	120V	15w	110°	Triac/ELV	27/30/35/40/50k
LED-SL-PNL-6SQ-14W-5CCT-0/10V	120-277V	14w	110°	0-10V	30/40/50k
LED-SL-PNL-6R-14W-5CCT-0/10V	120-277V	14w	110°	0-10V	27/30/35/40/50k
LED-SL-PNL-6SQ-14W-TRI	120V	14w	110°	Triac/ELV	30/40/50k



6R/6SQ-3P15W		6R-3P17W		6SQ-15W		6SQ-14W-0/10V/TRI		6SQ-14W	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
9	750	9	800	15	1,050	14	1,000	14	1,000
12	950	12	1,050						
15	1,150	17	1,400						

Fire Rated

Model	Voltage	Watts	Beam	Dimming	CCT
LED-SL-PNL-6R-15W-5CCT-FR-WH	120V	15w	110°	Triac/ELV	27/30/35/40/50k
LED-SL-PNL-6SQ-15W-5CCT-FR-WH	120V	15w	110°	Triac/ELV	27/30/35/40/50k



WATT	LUMENS
15	1,150





8" Slim Panel Downlight: SnapTrim - 5-CCT

Box Qty. 18

NEW

Model	Voltage	Watts	Beam	Dimming	CCT
LED-SL-PNL-8R-3P22W-5CCT-WH	120V	16/19/22w	110°	Triac/ELV	27/30/35/40/50k
LED-SL-PNL-8R-3P22HL-5CCT-WH	120V	22/18/12w	110°	Triac/ELV	27/30/35/40/50k
LED-SL-PNL-8R-3P23-5CCT-UNV	120-277V	23/17/12w	110°	0-10V	27/30/35/40/50k
LED-SL-PNL-8R-22W-5CCT-0/10V	120-277V	22w	110°	0-10V	27/30/35/40/50k

8R-3P22W		8R-3P22HL		8R-3P23	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
16	1,200	12	1,100	12	1,100
19	1,400	18	1,500	17	1,500
22	1,600	22	1,900	23	1,900



Square, 5-CCT, 3-Power

Box Qty. 18

Model	Voltage	Watts	Beam	Dimming	CCT
LED-SL-PNL-8SQ-3P22W-5CCT-WH	120V	16/19/22w	110°	Triac/ELV	27/30/35/40/50k

WATT	LUMENS
16	1,200
19	1,400
22	1,600

Pre-Installed Accessory	Description
Add '-EMB' to model #	Emergency backup (external 25W)



10" Slim Panel Downlight: SnapTrim - 5-CCT, 0-10V

Box Qty. 18

Model	Voltage	Watts	Beam	Dimming	CCT
LED-SL-PNL-10R-22W-5CCT-0/10V	120-277V	22w	110°	Triac/ELV	27/30/35/40/50k

WATT	LUMENS
22	1,600

Pre-Installed Accessory	Description
Add '-EMB' to model #	Emergency backup (external 25W)




Round Triac Dimmable Models: EcoValue - 5-CCT

Box Qty. 18

Model	Voltage	Watts	Beam	Dimming	CCT
ECV-WFR-4-9W-5CCT	120V	9w	110°	Triac/ELV	27/30/35/40/50k
ECV-WFR-6-12W-5CCT	120V	12w	110°	Triac/ELV	27/30/35/40/50k

4-9W		6-12W	
WATT	LUMENS	WATT	LUMENS
9	720	12	1,000

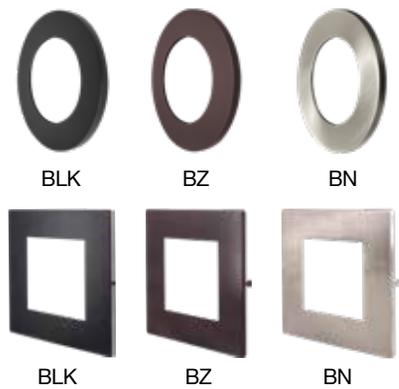

3 3/4" SLPNL Trims

Accessory	Description
SLPNL-TRIM-3R-BLK	3" Round black trim
SLPNL-TRIM-3R-BRZ	3" Round bronze trim
SLPNL-TRIM-3R-BNI	3" Round brushed nickel trim
SLPNL-TRIM-4R-BLK	4" Round black trim
SLPNL-TRIM-4R-BRZ	4" Round bronze trim
SLPNL-TRIM-4R-BNI	4" Round brushed nickel trim
SLPNL-TRIM-4SQ-BLK	4" Square black trim
SLPNL-TRIM-4SQ-BRZ	4" Square bronze trim
SLPNL-TRIM-4SQ-BNI	4" Square brushed nickel trim

6" SLPNL Trims

Accessory	Description
SLPNL-TRIM-6R-BLK	6" Round black trim
SLPNL-TRIM-6R-BRZ	6" Round bronze trim
SLPNL-TRIM-6R-BNI	6" Round brushed nickel trim
SLPNL-TRIM-6SQ-BLK	6" Square black trim
SLPNL-TRIM-6SQ-BRZ	6" Square bronze trim
SLPNL-TRIM-6SQ-BNI	6" Square brushed nickel trim




LED-EMB-25W-HV-0/10V



6' / 10' Extension Cable

SnapTrim LED Downlight Accessories


Accessory	Description
CUNV-NC-ICAT-7H	1" 2"3" 3.5" 4" 5" 6" Universal pre-mounting new construction plate
CUNV-NC-ICAT	2" 3" 4" 6" Universal pre-mounting new construction plate
CUNV-JBX-RI-XL	2" 3" 3.5" 4" 5" 6" Universal construction plate: Canless downlights
CUNV-NC-ICAT-6SQ	1" 2 3.5" 4" 5" 6" New construction plate: Canless downlights (only for trimless squares)
C4-JBX-RI	4" Rough in plate
CUNV-SQM-NC-ICAT	New construction plate: SQM fixtures
C6-JBX-RI	6" Rough In plate
C8-JBX-RI	8" Rough In plate
JBX-EXT-6'-TRI	6' Extension cable for fixture to J-box
JBX-EXT-10'-TRI	10' Extension cable for fixture to J-box
LED-EMB-25W-HV-0/10V	Emergency Back Up For Interl Drivers (Works with all 0-10V Dim or <25W fixtures) -Single Sided Flex-




CUNV-NC-ICAT
Universal Pre-Mounting Plate
5 3/10" x 14 1/2"




CUNV-JBX-RI-XL
Universal Pre-Mounting Plate
8.4" x 26"



CUNV-NC-ICAT-6SQ
Universal Construction Plate
14" x 13.75"




CUNV-SQM-NC-ICAT
Universal Pre-Mounting Plate
14 3/4" x 11 3/4"

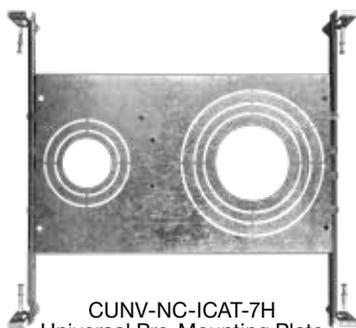

CUNV-NC-ICAT-7H
Universal Pre-Mounting Plate
13 7/8" x 15 1/8"



C4-JBX-RI
4" Rough In Plate
6 1/2" x 13 1/4"



C6-JBX-RI
6" Rough In Plate
8 1/2" x 17 1/4"



C8-JBX-RI
8" Rough In Plate
10 1/2" x 26"




4" Trimless Multiple Head Downlights - Single Head

JA8
TITLE 24
Box Qty. 18

Model	Voltage	Watts	Beam	Dimming	CCT
LED-SQM1-TML-4-15W-5CCT-WH-20	120V	15w	38°	Triac/ELV	27/30/35/40/50k
LED-SQM1-TML-4-15W-5CCT-BLK-20	120V	15w	38°	Triac/ELV	27/30/35/40/50k

WATT	LUMENS
15	1,000

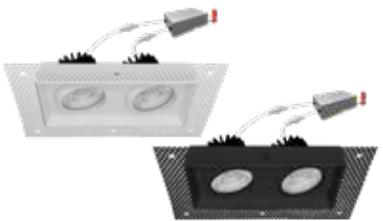

Double Head

Box Qty. 8

Model	Voltage	Watts	Beam	Dimming	CCT
LED-SQM2-TML-4-30W-5CCT-WH-20	120V	30w	38°	Triac/ELV	27/30/35/40/50k
LED-SQM2-TML-4-30W-5CCT-BLK-20	120V	30w	38°	Triac/ELV	27/30/35/40/50k

WATT	LUMENS
30	2,000



Triple Head

Box Qty. 8

Model	Voltage	Watts	Beam	Dimming	CCT
LED-SQM3-TML-4-45W-5CCT-WH-20	120V	45w	38°	Triac/ELV	27/30/35/40/50k
LED-SQM3-TML-4-45W-5CCT-BLK-20	120V	45w	38°	Triac/ELV	27/30/35/40/50k

WATT	LUMENS
45	3,000



4" Multiple Head Downlights - Single Head

JA8
TITLE 24
Box Qty. 18

Model	Voltage	Watts	Beam	Dimming	CCT
LED-SQM1-4-15W-5CCT-WH	120V	15w	20°	Triac/ELV	27/30/35/40/50k
LED-SQM1-4-15W-5CCT-BLK	120V	15w	20°	Triac/ELV	27/30/35/40/50k

WATT	LUMENS
15	1,000




Double Head

Box Qty. 8

Model	Voltage	Watts	Beam	Dimming	CCT
LED-SQM2-4-30W-5CCT-WH	120V	30w	20°	Triac/ELV	27/30/35/40/50k
LED-SQM2-4-30W-5CCT-BLK	120V	30w	20°	Triac/ELV	27/30/35/40/50k

WATT	LUMENS
30	2,000

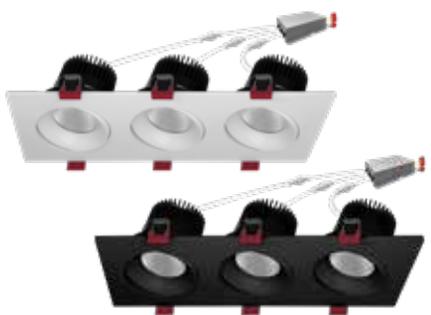

Triple Head

Box Qty. 8

Model	Voltage	Watts	Beam	Dimming	CCT
LED-SQM3-4-45W-5CCT-WH	120V	45w	20°	Triac/ELV	27/30/35/40/50k
LED-SQM3-4-45W-5CCT-BLK	120V	45w	20°	Triac/ELV	27/30/35/40/50k

WATT	LUMENS
45	3,000




CUNV-SQM-NC-ICAT
Universal Pre-Mounting Plate
14 3/4" x 11 3/4"



Beam

Accessory	Description
CUNV-SQM-NC-ICAT	New construction plate: SQM fixtures

Pre-Installed Accessory	Description
Add: -20D to Model #	20D Beam
Add: -38D to Model #	38D Beam
Add: -60D to Model #	60D Beam
Add '-EMB' to model #	Emergency backup (external 25W)

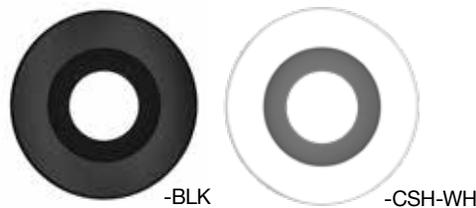

4" / 6" / 8" Commercial Downlight External J-Box - 5-CCT, 3-Power

Box Qty.
6



Model	Voltage	Watts	Beam	Dimming	CCT
LED-CMDEX-4-3M12-5CCT-CUNV	120-347V	12/9/6	90°	Triac/ELV	27/30/35/40/50k
LED-CMDEX-6-3M24-5CCT-CUNV	120-347V	24/16/12	90°	Triac/ELV	27/30/35/40/50k
LED-CMDEX-8-3M30-5CCT-CUNV	120-347V	30/22/16	90°	Triac/ELV	27/30/35/40/50k

4-3M12	
WATT	LUMENS
6	650
9	900
12	1,100

6-3M24	
WATT	LUMENS
12	1,100
16	1,500
24	1,950

8-3M30	
WATT	LUMENS
16	1,500
22	2,000
30	2,500

Commercial Downlight Trims

Box Qty.
12

Accessory	Description
CMDEX-TRIM-4-CSH-WH	4" CMDEX: Clear-specular haze reflector
CMDEX-TRIM-4-BLK	4" CMDEX : Black reflector
CMDEX-TRIM-6-CSH-WH	6" CMDEX: Clear-specular haze reflector
CMDEX-TRIM-6-BLK	6" CMDEX : Black reflector
CMDEX-TRIM-8-CSH-WH	8" CMDEX: Clear-specular haze reflector
CMDEX-TRIM-8-BLK	8" CMDEX : Black reflector

Accessories for CMD-3M Series

Accessory	Description
GR-4-WH	4" Goof ring, inner dim: 4" Outer Dim: 8"
GR-6-WH	6" Goof ring, inner dim: 6.3" Outer Dim: 10.5"
GR-8-WH	8" Goof ring, inner dim: 8" Outer Dim: 12.5"
GR-10-WH	10" Goof ring, inner dim: 9" Outer Dim: 14.1"
JBOX-ALM	Junction box (6 knock-outs)
CUNV-NC-RI-J-JBX	4/6/8/10" Commercial new construction plate with joist bar + J-box
EXT-10FT	10' Extension cable for remote mounting
EXT-20FT	20' Extension cable for remote mounting

Pre-Installed Accessory	Description
Add '-EMB' to model #	Emergency backup (external 25W)



8" / 10" Commercial Downlight - 5-CCT, 3-Power

SCCT Box Qty. 6

Model	Voltage	Watts	Beam	Dimming	CCT
LED-CMD-8-3M29-5CCT-UNV	120-277V	29/23/16.5w	80°	0-10V	27/30/35/40/50k
LED-CMD-8-3M36-5CCT-CUNV	120-277V	22/32/36w	80°	0-10V	27/30/35/40/50k
LED-CMD-10-3M38-5CCT-UNV	120-277V	38/30/21w	90°	0-10V	27/30/35/40/50k

8-3M29	
WATT	LUMENS
16.5	1,500
23	2,000
29	2,500

8-3M36		10-3M38	
WATT	LUMENS	WATT	LUMENS
21	2,500	21	2,000
30	3,500	30	2,500
38	3,900	38	3,300

4-5P13		6-5P19		6-5P24	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
5.5	650	8	1,000	9.5	1,200
7	850	10	1,200	13	1,600
9	1,100	13	1,500	18.5	2,200
10	1,200	15	1,750	21	2,400
13	1,450	19	2,000	24	2,800

6-5P30		6-5P38	
WATT	LUMENS	WATT	LUMENS
16	2,050	20	2,550
20	2,450	24	2,850
23	2,700	28	3,200
27	3,200	32	3,600
30	3,350	38	4,150



5-CCT, 5-Power

NEW

Model	Voltage	Watts	Beam	Dimming	CCT
LED-CMD-4-5P13-5CCT-UNV	120-277V	13/10/9/7/5.5w	90°	TRI: 0-10V, ELV, Triac	27/30/35/40/50k
LED-CMD-6-5P19-5CCT-UNV	120-277V	19/15/13/10/8w	90°	TRI: 0-10V, ELV, Triac	27/30/35/40/50k
LED-CMD-6-5P24-5CCT-UNV	120-277V	24/21/18.5/13/9.5w	90°	TRI: 0-10V, ELV, Triac	27/30/35/40/50k
LED-CMD-8-5P30-5CCT-UNV	120-277V	30/27/23/20/16w	95°	TRI: 0-10V, ELV, Triac	27/30/35/40/50k
LED-CMD-10-5P38-5CCT-UNV	120-277V	38/32/28/24/20w	95°	TRI: 0-10V, ELV, Triac	27/30/35/40/50k

Wall Wash Trims

Box Qty. 24

Accessory	Description
CMD-4-WASH-WH	4" CMD: Wall wash trim
CMD-6-WASH-WH	6" CMD: Wall wash trim
CMD-8-WASH-WH	8" CMD: Wall wash trim

Trim Accessories for CMD-3M Series

Box Qty. 12

Accessory	Description
CMD-TRIM-4-CSH-WH-SM	4" CMD: Clear-specular haze reflector + white trim
CMD-TRIM-4-HZ-SM	4" Clear-specular haze reflector
CMD-TRIM-4-BLK-SM	4" Black reflector
CMD-TRIM-6-CSH-WH-SM	6" CMD: Clear-specular haze reflector + white trim
CMD-TRIM-6-HZ-SM	6" Clear-specular haze reflector
CMD-TRIM-6-BLK-SM	6" Black reflector
CMD-TRIM-8-CSH-WH-SM	8" CMD: Clear-specular haze reflector + white trim
CMD-TRIM-8-HZ-SM	8" Clear-specular haze reflector
CMD-TRIM-8-BLK-SM	8" Black reflector
CMD-TRIM-10-HZ-SM	10" Clear-specular haze reflector
CMD-TRIM-10-BLK-SM	10" Black reflector

4" / 6" Square Commercial Downlight

Box Qty. 6

Model	Voltage	Watts	Beam	Dimming	CCT
LED-CMDSQ-4-3M13-5CCT-UNV	120-277V	13/9/6w	80°	TRI: 0-10V, ELV, Triac	27/30/35/40/50k
LED-CMDSQ-6-3M16-5CCT-UNV	120-277V	16/12/8w	80°	TRI: 0-10V, ELV, Triac	27/30/35/40/50k
LED-CMDSQ-6-3M30-5CCT-UNV	120-277V	30/20/15w	80°	TRI: 0-10V, ELV, Triac	27/30/35/40/50k

4-3M13		6-3M16		6-3M30	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
6	600	8	750	15	1500
9	850	12	1100	20	2000
13	1200	16	1500	30	2850

Accessories for CMD-3M Series

Accessory	Description
GR-4-WH	4" Goof ring, inner dim: 4" outer dim: 8"
GR-6-WH	6" Goof ring, inner dim: 6.3" outer dim: 10.5"
GR-8-WH	8" Goof ring, inner dim: 8" outer dim: 12.5"
GR-10-WH	10" Goof ring, inner dim: 9" outer dim: 14.1"
JBOX-ALM	Junction box (6 knock-outs)
CUNV-NC-RI-J-JBX	4/6/8/10" Commercial new construction plate with joist bar + J-box
LED-EMB-25W-HV-0/10V	Emergency back up for internal drivers (works with all 0-10V dim or <25W fixtures)

Pre-Installed Accessory	Description
Add '-EMB' to model #	Emergency backup (external 25W)

SCCT

SCCT

SCCT



4" / 6" / 8" / 10" Commercial Downlight Module

5-CCT, 3-Power

Box Qty.
6



NEW
NEW

Model	Voltage	Watts	Beam	Dimming	CCT
LED-CADM-3P18-5CCT-UNV	120-277V	18/13/9w	90°	0-10/Triac/ELV	27/30/35/40/50k
LED-CADM-3P30-5CCT-UNV	120-277V	30/24/20w	90°	0-10/Triac/ELV	27/30/35/40/50k
LED-CADM-3M56-5CCT-UNV	120-277V	56/45/35w	90°	0-10V	27/30/35/40/50k

3P18		3P30	
WATT	LUMENS	WATT	LUMENS
9	850	20	1,500
13	1,150	24	2,000
18	1,500	30	2,500

3M56	
WATT	LUMENS
35	3,500
45	4,000
56	5,000

Wall Wash Trims

Box Qty.
24

NEW

Pre-Installed Accessory	Description
CADM-4-WASH-WH	4" CADM: Wall Wash Trim White
CADM-4-WASH-CSH	4" CADM: Wall Wash Clear-Specular Haze Reflector/White Trim
CADM-6-WASH-WH	6" CADM: Wall Wash Trim White
CADM-6-WASH-CSH	6" CADM: Wall Wash Clear-Specular Haze Reflector/White Trim
CADM-8-WASH-WH	8" CADM: Wall Wash Trim White
CADM-8-WASH-CSH	8" CADM: Wall Wash Clear-Specular Haze Reflector/White Trim

4" / 6" / 8" / 10" Commercial Downlight Trims

Box Qty.
6

Model	Description
CADM-4-CSH	4" Clear-specular haze reflector/white trim (3M20, 3M30 & 3M35 only)
CADM-4-CSH-BLK	4" Clear-specular haze reflector/black trim (3M20, 3M30 & 3M35 only)
CADM-4-CSH-SQ	4" Clear-specular haze reflector/white square trim (3M20, 3M30 & 3M35 only)
CADM-4-WH	4" White reflector + trim (3M20 & 3M35 only)
CADM-6-CSH	6" Clear-specular haze reflector/white trim
CADM-6-CSH-BLK	6" Clear-specular haze reflector/black trim
CADM-6-CSH-SQ	6" Clear-specular haze reflector/white square trim (3M20, 3M30 & 3M35 only)
CADM-6-WH	6" White reflector + trim
CADM-8-CSH	8" Clear-specular haze reflector/white trim
CADM-8-CSH-BLK	8" Clear-specular haze reflector/black trim
CADM-8-CSH-SQ	8" Clear-specular haze reflector/white square trim (3M20, 3M30 & 3M35 only)
CADM-8-WH	8" White reflector + trim
CADM-10-CSH	10" Clear-specular haze reflector/white trim
CADM-10-WH	10" White reflector + trim

* Custom color trims are available

Accessories for CADM Series

Model	Description
GR-4-WH	4" Goof ring, inner dim: 4.9" outer dim: 6.5"
GR-6-WH	6" Goof ring, inner dim: 6.3" outer dim: 10.5"
GR-8-WH	8" Goof ring, inner dim: 8" outer dim: 12.5"
GR-10-WH	10" Goof ring, inner dim: 9" outer dim: 14.1"
JBOX-ALM	Junction box (6 knock-outs)
CUNV-NC-RI-JJBX	New construction plate: 4" 6" 8" 10" CADM or CMD round
CUNV-NC-SQI-JJBX	New construction plate: 4" 6" 8" CADM square
CUNV-NC-ICAT-7H	New construction plate: 1" 2"3" 3.5" 4" 5" 6" canless downlights
CUNV-JBX-RI-XL	Universal construction plate: 2"3" 3.5" 4" 5" 6" canless downlights



-CSH



-WH




-BLK



-SQ



-WASH-WH



GR




-WASH-CSH




J-BOX ALM

4.46" W x 3.04" D x 1.37" H



CUNV-NC-RI-JJBX
21.2" W x 12" D x 1.6" H
(Assembly Required)




CUNV-NC-SQI-JJBX
21.2" W x 12" D x 1.6" H
(Assembly Required)

38°-75°
Adjustable
Beam Angle



Twist-On for
Easy Installation



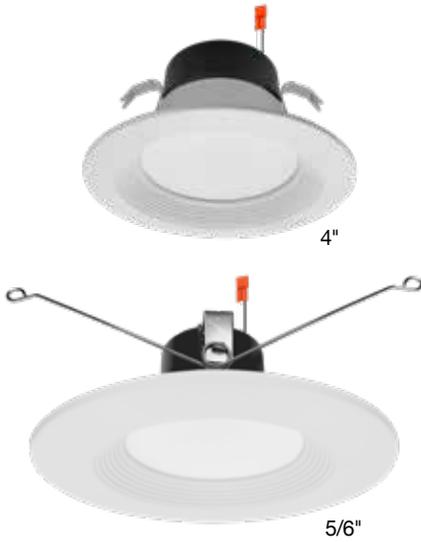


4" / 5/6" Smart Retrofit Kit Downlight RGB+W

Box Qty. 12

Model	Voltage	Watts	CCT
LED-ECODL-4-10W-RGB+W	120V	10.5w	RGB+W
LED-ECODL-5/6-12W-RGB+W	120V	12w	RGB+W

4-10W		5/6-12W	
WATT	LUMENS	WATT	LUMENS
10.5	800	12	1,000

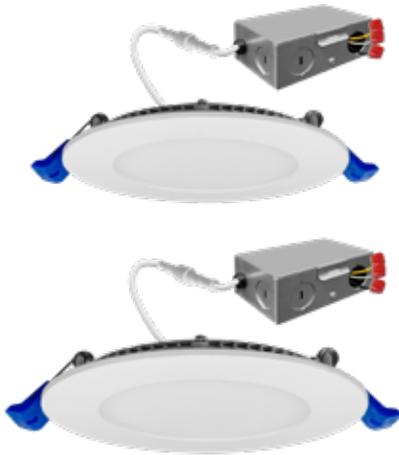

4"/6" SnapTrim Round Downlight RGB+W

Box Qty. 18

Model	Voltage	Watts	CCT
LED-SL-PNL-4R-9W-RGB+W-WH	120V	9w	RGB+W
LED-SL-PNL-6R-12W-RGB+W-WH	120V	12w	RGB+W

4R-9W		6R-12W	
WATT	LUMENS	WATT	LUMENS
9	600	12	1,000



6" Cusp Disk RGB+W

Box Qty. 20

Model	Voltage	Watts	CCT
LED-CDSK-6-15W-RGB+W-WH	120V	15w	RGB+W

WATT	LUMENS
15	1,000

7" Round Slimline Disk RGB+W

Box Qty. 20

Model	Voltage	Watts	CCT
LED-SLDSKR-7-15W-RGB+W-WH	120V	15w	RGB+W

WATT	LUMENS
15	1,000



Envision
CONNECT



Download on
APP STORE




COLOR



WHITE



SCENE



MUSIC RHYTHM



Final Production

4" / 6" SnapTrim Downlight - Single CCT

Box Qty. 12

Model	Voltage	Watts	Dimming	Beam	CCT
LED-DLJBX-4B-7W-40K	120V	7w	Yes	80°	4000k
LED-DLJBX-6B-9W-27K	120V	9w	Yes	80°	2700k

4B-7W		6B-9W	
WATT	LUMENS	WATT	LUMENS
7	550	9	650



4" / 5/6" RDL Downlights - Internal J-Box, 5-CCT

JA8 TITLE 24 Box Qty. 24

Model	Voltage	Watts	Beam	Dimming	CCT
LED-RDL-JBX-4-11W-5CCT-WH-SM	120V	11w	100°	Triac/ELV	27/30/35/40/50k
LED-RDL-JBX-5/6-15W-5CCT-WH-SM	120V	15w	100°	Triac/ELV	27/30/35/40/50k

4-11W		5/6-15W	
WATT	LUMENS	WATT	LUMENS
11	750	15	1125



2" / 4" / 6" RDL Downlights - External J-Box, 5-CCT

Box Qty. 24

Model	Voltage	Watts	Beam	Dimming	CCT
LED-RDL-EX-2-3P8-5CCT-WH-SM	120V	8/6/4w	100°	Triac/ELV	27/30/35/40/50k
LED-RDL-EX-4-3P12-5CCT-WH-SM	120V	12/10/8w	100°	Triac/ELV	27/30/35/40/50k
LED-RDL-EX-6-3P18-5CCT-WH-SM	120V	18/15/12w	100°	Triac/ELV	27/30/35/40/50k

2-3P8		4-3P12		6-3P18	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
4	275	8	560	12	700
6	410	10	700	15	1,100
8	560	12	960	18	1,500



4" / 5/6" RDL Downlights - Retrofit Kit ECOVALUE Models

Box Qty. RDL-4- 60 RDL-5/6- 36


Model	Voltage	Watts	Beam	Dimming	CCT
ECV-RDL-4-10W-5CCT-WH-SM	120V	10w	100°	Triac/ELV	27/30/35/40/50k
ECV-RDL-4-10W-5CCT-WH-BFL	120V	10w	100°	Triac/ELV	27/30/35/40/50k
ECV-RDL-5/6-15W-5CCT-WH-SM	120V	15w	100°	Triac/ELV	27/30/35/40/50k
ECV-RDL-5/6-15W-5CCT-WH-BFL	120V	15w	100°	Triac/ELV	27/30/35/40/50k

4-10W		5/6-15W	
WATT	LUMENS	WATT	LUMENS
10	800	15	1200

Box Qty.
RDL-4- 60
RDL-5/6- 36



4" / 5/6" RDL Downlights - Retrofit Kit Models

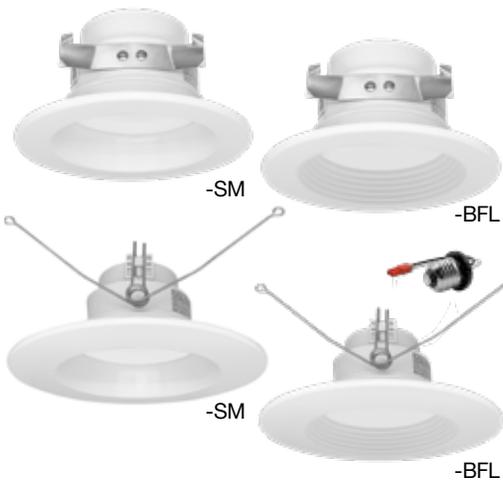

Model	Voltage	Watts	Beam	Dimming	CCT
LED-RDL-4-3P12-5CCT-WH-SM	120V	12/10/8w	100°	Triac/ELV	27/30/35/40/50k
LED-RDL-4-3P12-5CCT-WH-BFL	120V	12/10/8w	100°	Triac/ELV	27/30/35/40/50k
LED-RDL-5/6-3P18-5CCT-WH-SM	120V	18/14/10w	100°	Triac/ELV	27/30/35/40/50k
LED-RDL-5/6-3P18-5CCT-WH-BFL	120V	18/14/10w	100°	Triac/ELV	27/30/35/40/50k

3P12		RDL-5/6	
WATT	LUMENS	WATT	LUMENS
8	500	10	800
10	700	14	1,200
12	1,000	18	1,500

4" / 5/6" RDL Downlights - 0-10V Retrofit Kit Models

Box Qty.
RDL-4- 60
RDL-5/6- 36



Model	Voltage	Watts	Beam	Dimming	CCT
LED-RDL-4-3P12-5CCT-UNV-0/10V	120-277V	12/10/8w	100°	Triac/ELV	27/30/35/40/50k
LED-RDL-5/6-3P18-5CCT-UNV-0/10V	120-277V	18w/14/10w	100°	Triac/ELV	27/30/35/40/50k

3P12		3P18	
WATT	LUMENS	WATT	LUMENS
8	600	10	700
10	850	14	1,100
12	1,100	18	1,500



Watt Selection 5-CCT Selection



DISPLAY

Display featuring 10 of our canless downlights. Place a \$3,000+ stock orders of downlights and get a free counter display.



RDL-6CLIP

RDL Trims



BLK-SM BZ-SM BN-SM
BLK-BFL BZ-BFL BN-BFL

Accessory Model	Description
RDL-TRIM-4-BLK-SM	4" Black trim smooth
RDL-TRIM-4-BZ-SM	4" Bronze trim smooth
RDL-TRIM-4-BN-SM	4" Brushed nickel trim smooth
RDL-TRIM-4-WH-BFL	4" White trim baffle
RDL-TRIM-4-BLK-BFL	4" Black trim baffle
RDL-TRIM-4-BZ-BFL	4" Bronze trim baffle
RDL-TRIM-4-BN-BFL	4" Brushed nickel trim baffle
RDL-TRIM-5/6-BLK-SM	5/6" Black trim smooth
RDL-TRIM-5/6-BZ-SM	5/6" Bronze trim smooth
RDL-TRIM-5/6-BN-SM	5/6" Brushed nickel trim smooth
RDL-TRIM-5/6-WH-BFL	5/6" White trim baffle
RDL-TRIM-5/6-BLK-BFL	5/6" Black trim baffle
RDL-TRIM-5/6-BRZ-BFL	5/6" Bronze trim baffle
RDL-TRIM-5/6-BN-BFL	5/6" Brushed nickel trim baffle



4" / 6" LED External J-Box Square Downlight

5-CCT, 3-Power

Box Qty.
12

Model	Voltage	Watts	Beam	Dimming	CCT
LED-DL-SQ-EX-4-3P12-5CCT-WH-SM	120V	12/10/8w	100°	Triac/ELV	27/30/35/40/50k
LED-DL-SQ-EX-6-3P18-5CCT-WH-SM	120V	18/15/12w	100°	Triac/ELV	27/30/35/40/50k



4-3P12		6-3P18	
WATT	LUMENS	WATT	LUMENS
8	560	12	700
10	700	15	1,100
12	960	18	1,500



4" / 6" Retrofit Kit Square Downlight

5-CCT, Retrofit Kit Models

Box Qty.
12

Model	Voltage	Watts	Beam	Dimming	CCT
LED-DL-SQ-4-11W-5CCT	120V	11w	100°	Triac/ELV	27/30/35/40/50k
LED-DL-SQ-6-14W-5CCT	120V	14w	100°	Triac/ELV	27/30/35/40/50k



4-11W		6-14W	
WATT	LUMENS	WATT	LUMENS
11	750	14	1,100



4" / 5/6" Square Downlights

0-10V Retrofit Kit Models: Multi-Volt

Box Qty.
12

Model	Voltage	Watts	Beam	Dimming	CCT
LED-DL-SQ-4-9W-5CCT-UNV-0/10V	120-277V	9w	100°	0-10V	27/30/35/40/50k
LED-DL-SQ-6-13W-5CCT-UNV-0/10V	120-277V	13w	100°	0-10V	27/30/35/40/50k



4-9W		6-13W	
WATT	LUMENS	WATT	LUMENS
9	765	13	1,100

Pre-Installed Accessory	Description
LED-EMB-25W-HV-0/10V-2P	Emergency back up for internal drivers (works with all 0-10V dim or <25W fixtures single sided flex)



-BLK

-BZ

Square Trims

Box Qty.
50

Accessory Model	Description
DL-SQ-4-TRIM-BLK-SM	4" black smooth trim
DL-SQ-4-TRIM-BZ-SM	4" bronze smooth trim
DL-SQ-6-TRIM-BLK-SM	6" black smooth trim
DL-SQ-6-TRIM-BZ-SM	6" bronze smooth trim



Final Production

4" ADL Retrofit Kit Downlight - Single CCT

JA8 TITLE 24 COMPLIANT Box Qty. 20

Model	Voltage	Watts	Beam	Dimming	CCT
LED-ADL-4-10W-40K	120V	10w	100°	Triac/ELV	4000k
LED-ADL-4-10W-50K	120V	10w	100°	Triac/ELV	5000k

WATT	LUMENS
10	665



4" 12V Innovate Retrofit Kit Downlight - 5-CCT Round

Box Qty. 24

Model	Voltage	Watts	CCT
LED-EDL-4-10W-5CCT-WH-12V	12V	10w	27/30/35/40/50k

WATT	LUMENS
10	600



Square

Box Qty. 24

Model	Voltage	Watts	CCT
LED-EDL-SQ-4-10W-5CCT-WH-12V	12V	10w	27/30/35/40/50k

WATT	LUMENS
10	600



Adjustable Retrofit Kit Downlight 4" Models

Box Qty. 24

Model	Voltage	Watts	Beam	Dimming	CCT
LED-DL-ADJ-4-10W-5CCT-WH	120V	10w	40°	Triac/ELV	27/30/35/40/50k
LED-DL-ADJ-4-10W-5CCT-BLK	120V	10w	40°	Triac/ELV	27/30/35/40/50k

WATT	LUMENS
10	750



5/6" Models

Box Qty. 16

Model	Voltage	Watts	Beam	Dimming	CCT
LED-DL-ADJ-5/6-16.5W-5CCT-WH	120V	16.5w	40°	Triac/ELV	27/30/35/40/50k
LED-DL-ADJ-5/6-16.5W-5CCT-BLK	120V	16.5w	40°	Triac/ELV	27/30/35/40/50k

WATT	LUMENS
16.5	1,200




Final Production

5/6" Models

Box Qty. 16

Model	Voltage	Watts	Beam	Dimming	CCT
LED-DL-ADJ-5/6-16.5W-WW	120V	16.5w	40°	Triac/ELV	3000k

WATT	LUMENS
16.5	1,200

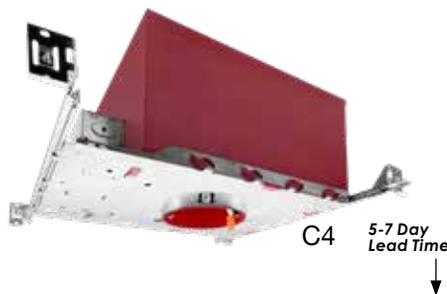


5-7 Day Lead Time



LED Cans (IC-Rated) - Fire-Rated Models

Box Qty. 4

Accessory Model	Voltage	Description
C4-NC-ICAT-LED-FR	120-277V	4" Fire rated IC can (new construction)
C6-NC-ICAT-LED-FR	120-277V	6" Fire rated IC can (new construction)
C4-NC-ICAT-LED-FR-0/10V	120-277V	4" Fire rated IC can (new construction)
C6-NC-ICAT-LED-FR-0/10V	120-277V	6" Fire rated IC can (new construction)

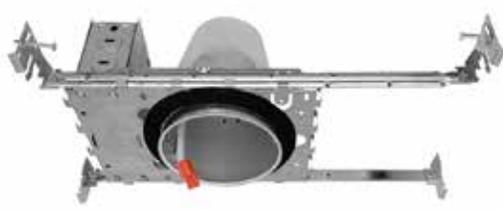

Regular Models

Box Qty. 6


Accessory Model	Voltage	Description
C4-NC-ICAT-LED	120-277V	4" IC rated can (new construction)
C4-RM-ICAT-LED	120-277V	4" IC rated can (remodel)
C6-NC-ICAT-LED	120-277V	6" IC rated can (new construction)
C6-RM-ICAT-LED	120-277V	6" IC rated can (remodel)



5-7 Day Lead Time

0-10V

Accessory Model	Voltage	Description
C4-NC-ICAT-LED-0/10V	120-277V	4" IC rated can (new construction)
C4-RM-ICAT-LED-0/10V	120-277V	4" IC rated can (remodel)
C6-NC-ICAT-LED-0/10V	120-277V	6" IC rated can (new construction)
C6-RM-ICAT-LED-0/10V	120-277V	6" IC rated can (remodel)

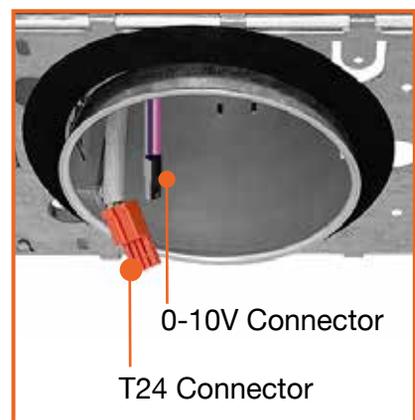

0-10V Connection





Trimless Surface Downlight

Model	Voltage	Watts	CCT
LED-TSM-5R-12W-5CCT-WH	120V	12w	27/30/35/40/50k
LED-TSM-5R-12W-30K-BN	120V	12w	3000k
LED-TSM-7R-15W-5CCT-WH	120V	15w	27/30/35/40/50k
LED-TSM-7R-15W-30K-BLK	120V	15w	3000k
LED-TSM-7R-15W-30K-BN	120V	15w	3000k
LED-TSM-9R-18W-5CCT-WH	120V	18w	27/30/35/40/50k
LED-TSM-9R-18W-30K-BLK	120V	18w	3000k
LED-TSM-11R-20W-5CCT-WH	120V	20w	27/30/35/40/50k
LED-TSM-11R-20W-30K-WH	120V	20w	3000k
LED-TSM-11R-20W-30K-BN	120V	20w	3000k



5R-12W		7R-15W		9R-18W		11R-20W	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
12	850	15	1,100	18	1,300	20	1,500



Emergency Backup

Box Qty. 20

Model	Voltage	Watts	Lumens
TSM-7R-EMB-UNV	120V	15w	1100
TSM-7R-EMB-UNV-EMPTY	-	-	-
TSM-9R-EMB-UNV	120V	18w	1300
TSM-9R-EMB-UNV-EMPTY	-	-	-

Converter Clips

Box Qty. 20

Model	Description
TSM-4CLIP	TSM-5: 4" Recessed Can Converter
TSM-6CLIP	TSM-7: 6" Recessed Can Converter

Pre-Installed Accessory	Description
LED-EMB-25W-HV-0/10V	Emergency back up for internal drivers (works with all 0-10V dim or <25W fixtures) single sided flex






Slim Surface Downlight: PIR + Daylight Sensor

JAB TITLE 24 COMPLIANT Box Qty. 20




Model	Voltage	Watts	CCT
LED-SLDSKR-5-12W-5CCT-WH-BMS	120-277V	12w	27/30/35/40/50k
LED-SLDSKR-7-13W-5CCT-WH-BMS	120-277V	13w	27/30/35/40/50k
LED-SLDSKR-12-23W-5CCT-WH-BMS	120-277V	23w	27/30/35/40/50k

5-12W		7-13W		12-23W	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
12	750	13	1,050	23	1,950

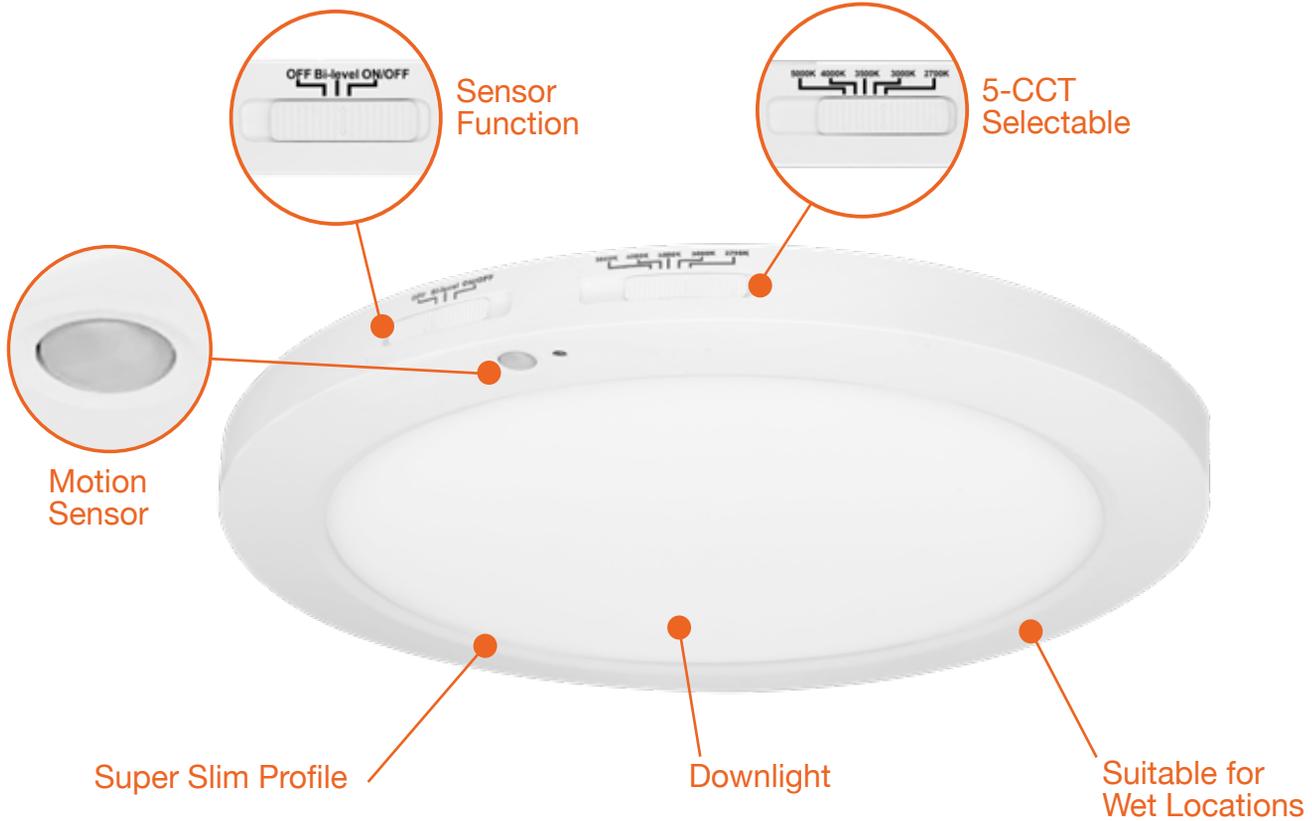

3 SENSOR SETTINGS

- OFF: Sensor will be inactive
- ON/OFF: Fixture will turn off after 1 minute
- Bi-Level: Fixture will dim to 30% after 1 minute, never turns off

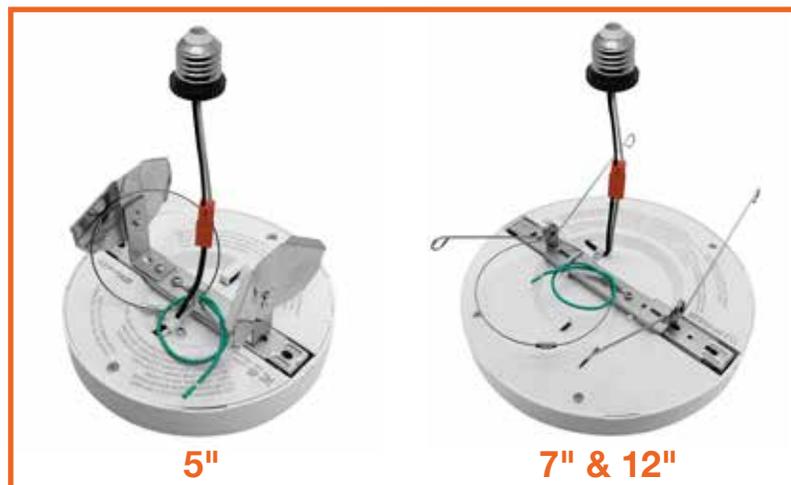


RETROFIT KIT CAN CONVERTER

Box Qty.
5- 20
7- 20
12- 6
15- 5
19- 4



Slim Surface Downlight: Round - Triac Dimmable

Model	Voltage	Watts	CCT
LED-SLDSKR-5-10W-5CCT-WH	120V	10w	27/30/35/40/50k
LED-SLDSKR-7-15W-5CCT-WH	120V	15w	27/30/35/40/50k
LED-SLDSKR-12-22W-5CCT-WH	120V	22w	27/30/35/40/50k
LED-SLDSKR-12-24W-5CCT-WH	120V	24w	27/30/35/40/50k
LED-SLDSKR-15-30W-5CCT-WH	120V	30w	27/30/35/40/50k
LED-SLDSKR-19-35W-TRI-WH	120V	35w	50/40/30k
LED-SLDSKR-19-35W-5CCT-WH	120V	35w	27/30/35/40/50k
LED-SLDSKR-19-35W-5CCT-BLK	120V	35w	27/30/35/40/50k
LED-SLDSKR-19-35W-5CCT-BN	120V	35w	27/30/35/40/50k
LED-SLDSKR-24-40W-5CCT-WH	120V	40w	27/30/35/40/50k
LED-SLDSKR-24-40W-5CCT-BL	120V	40w	27/30/35/40/50k

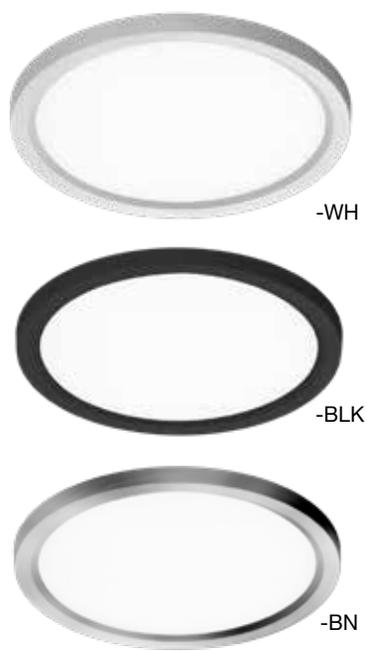

5-10W		7-15W		12-22W		12-24W	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
10	650	15	1,000	22	1,400	24	1,800

15-30W		19-35W		24-40W	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
30	2,000	35	2,200	40	2,700

Box Qty.
5- 20
7- 20
12- 6

0-10V Dimmable

Model	Voltage	Watts	CCT
LED-SLDSKR-5-10W-5CCT-WH-0/10V	120-277V	10w	27/30/35/40/50k
LED-SLDSKR-7-15W-5CCT-WH-0/10V	120-277V	15w	27/30/35/40/50k
LED-SLDSKR-12-22W-5CCT-WH-0/10V	120-277V	22w	27/30/35/40/50k
LED-SLDSKR-15-30W-5CCT-WH-0/10V	120-277V	30w	27/30/35/40/50k



5-10W		7-15W		12-22W		15-30W	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
10	650	15	1,000	22	1,450	30	2,000

Round Trim Options

Box Qty.
20

Model	Description
SLDSKR-5-TRIM-BLK	5" Round snap on trim black
SLDSKR-5-TRIM-BRZ	5" Round snap on trim bronze
SLDSKR-5-TRIM-BNI	5" Round snap on trim brushed nickel
SLDSKR-7-TRIM-BLK	7" Round snap on trim black
SLDSKR-7-TRIM-BRZ	7" Round snap on trim bronze
SLDSKR-7-TRIM-BNI	7" Round snap on trim brushed nickel
SLDSKR-12-TRIM-BLK	12" Round snap on trim black
SLDSKR-12-TRIM-BRZ	12" Round snap on trim bronze
SLDSKR-12-TRIM-BNI	12" Round snap on trim brushed nickel
SLDSKR-15-TRIM-BLK	15" Round snap on trim black
SLDSKR-15-TRIM-BRZ	15" Round snap on trim bronze
SLDSKR-15-TRIM-BNI	15" Round snap on trim brushed nickel

Round Accessories


Box Qty.
7- 20
12- 6

Model	Description
SLDSKR-7-EMB-UNV	7" Round EM backup for all models
SLDSKR-7-EMB-EMPTY-UNV	7" Round backup empty body for all models
SLDSKR-12-EMB-UNV	12" Round EM backup for all models
SLDSKR-12-EMB-EMPTY-UNV	12" Round backup empty body for all models

Converter Clips

Box Qty.
4- 20
7- 50 - 12- 50

Model	Description
SLDSK-4CLIP	SLDSK-5: 4" Recessed Can Converter
SLDSK-7-6CLIP	SLDSK-7: 7" Recessed Can Converter
SLDSK-12-6CLIP	SLDSK-12: 12" Recessed Can Converter

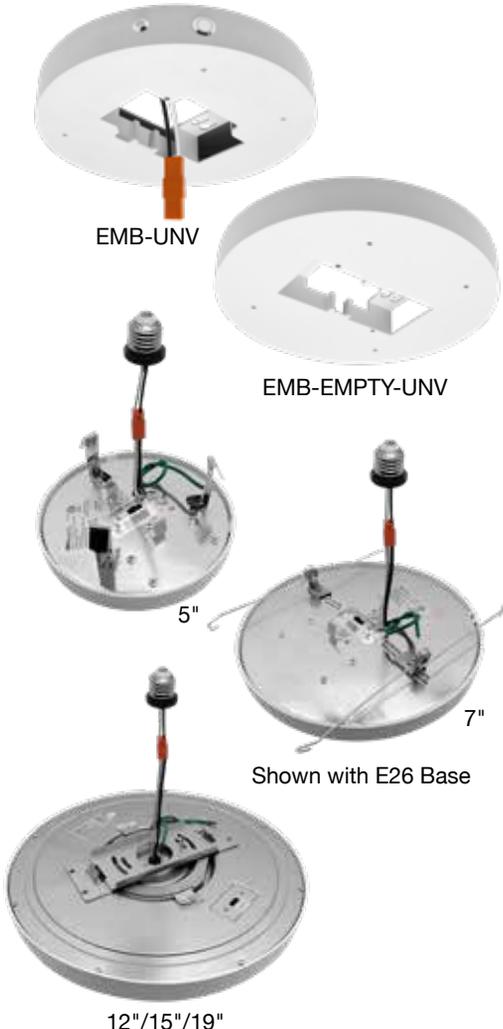


12"/15"/19"

Box Qty. Box Qty.
5- 20 15- 8
7- 20 19- 6
9- 20 24- 4
12- 8



Slim Surface Downlight: Round - Triac Dimmable

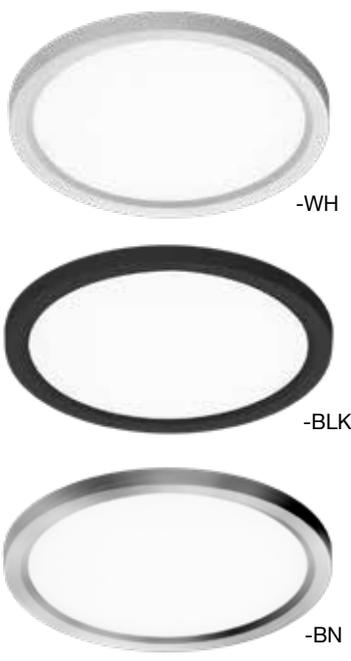

Model	Voltage	Watts	CCT
LED-SLSM-5R-11W-5CCT-WH	120V	11W	27/30/35/40/50k
LED-SLSM-7R-15W-5CCT-WH	120V	15W	27/30/35/40/50k
LED-SLSM-9R-18W-5CCT-WH	120V	18W	27/30/35/40/50k
LED-SLSM-12R-3P24-5CCT-WH	120V	24/20/18w	27/30/35/40/50k
LED-SLSM-15R-3P30-5CCT-WH	120V	30/25/20w	27/30/35/40/50k
LED-SLSM-19R-3P35-5CCT-WH	120V	35/30/25w	27/30/35/40/50k
LED-SLSM-24R-3P40-5CCT-WH	120V	40/35/30w	27/30/35/40/50k

3P24		3P30		3P35		3P40	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
18	1,400	20	1,500	25	1,800	30	2,250
20	1,600	25	1,750	30	2,000	35	2,450
24	1,800	30	2,000	35	2,200	40	2,700

Box Qty.
5- 20 7- 20
12- 8 15- 8



0-10V Dimmable

Model	Voltage	Watts	CCT
LED-SLSM-5R-3P12-5CCT-WH-UNV	120-277V	12/8/6w	27/30/35/40/50k
LED-SLSM-7R-3P15-5CCT-WH-UNV	120-277V	15/10/7w	27/30/35/40/50k
LED-SLSM-12R-3P24-5CCT-WH-UNV	120-277V	24/20/18w	27/30/35/40/50k
LED-SLSM-15R-3P30-5CCT-WH-UNV	120-277V	30/25/20w	27/30/35/40/50k

3P12		3P15		3P24		3P30	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
6	600	7	675	18	1,500	20	1,700
8	800	10	1,000	20	1,700	25	2,220
12	1,200	15	1,250	24	2,000	30	2,460

Round Trim Options

Box Qty.
20




Model	Description
SLSM-5R-TRIM-BL	5" Snap on Trim Black
SLSM-5R-TRIM-BN	5" Snap on Trim Brushed Nickel
SLSM-5R-TRIM-BZ	5" Snap on Trim Bronze
SLSM-7R-TRIM-BL	7" Snap on Trim Black
SLSM-7R-TRIM-BN	7" Snap on Trim Brushed Nickel
SLSM-7R-TRIM-BZ	7" Snap on Trim Bronze
SLSM-9R-TRIM-BL	9" Snap on Trim Black
SLSM-9R-TRIM-BN	9" Snap on Trim Brushed Nickel
SLSM-9R-TRIM-BZ	9" Snap on Trim Bronze
SLSM-12R-TRIM-BL	12" Snap on Trim Black
SLSM-12R-TRIM-BN	12" Snap on Trim Brushed Nickel
SLSM-12R-TRIM-BZ	12" Snap on Trim Bronze
SLSM-15R-TRIM-BL	15" Snap on Trim Black
SLSM-15R-TRIM-BN	15" Snap on Trim Brushed Nickel

Round Accessories

Box Qty.
7- 20
12- 6

Model	Description
SLDSKR-7R-EMB-UNV	7" Round EM backup for all models
SLDSKR-7R-EMB-EMPTY-UNV	7" Round backup empty body for all models
SLDSKR-12R-EMB-UNV	12" Round EM backup for all models
SLDSKR-12R-EMB-EMPTY-UNV	12" Round backup empty body for all models
SLSM-7R-EMB-UNV	SLDSKR-7: EM Backup for All Models
SLSM-7R-EMB-EMPTY-UNV	SLDSKR-7: EM Backup Empty Body for All Models
SLSM-12R-EMB-UNV	SLDSKR-12: EM Backup for All Models
SLSM-12R-EMB-EMPTY-UNV	SLDSKR-12: EM Backup Empty Body for All Models

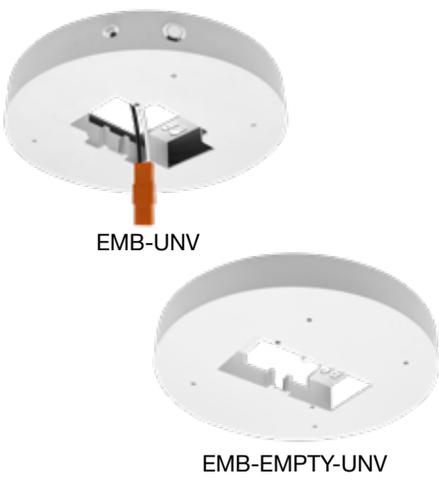



5"

Final Production →

Slim Surface Downlight: Square - Triac Dimmable **JAB** TITLE 24 COMPLIANT **Box Qty. 20**

Model	Voltage	Watts	CCT
LED-SLDSKSQ-5-10W-5CCT-WH	120V	10w	27/30/35/40/50k
LED-SLDSKSQ-5-10W-TRI	120V	10w	30/40/50k
LED-SLDSKSQ-7-15W-5CCT-WH	120V	15w	27/30/35/40/50k
LED-SLDSKSQ-12-22W-5CCT-WH	120V	22w	27/30/35/40/50k

5CCT
3CCT

5-10W		7-15W		12-22W	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
10	650	15	1,000	22	1,450



7"

Final Production →

0-10V 120-277V **Box Qty. 20**

Model	Voltage	Watts	CCT
LED-SLDSKSQ-5-10W-30K-0/10V	120-277V	10w	3000k
LED-SLDSKSQ-7-15W-TRI-0/10V	120-277V	15w	30/40/50k
LED-SLDSKSQ-5-10W-5CCT-WH-0/10V	120-277V	10w	27/30/35/40/50k
LED-SLDSKSQ-7-15W-5CCT-WH-0/10V	120-277V	15w	27/30/35/40/50k

3CCT
5CCT

5-10W		7-15W	
WATT	LUMENS	WATT	LUMENS
10	650	15	1,000




12"

Final Production →

Square Trim Options

Box Qty.
5 - 20
7 - 50 - 12 - 10

Model	Description
SLDSKSQ-5-TRIM-BLK	5" Square snap on trim black
SLDSKSQ-5-TRIM-BRZ	5" Square snap on trim bronze
SLDSKSQ-5-TRIM-BNI	5" Square snap on trim brushed nickel
SLDSKSQ-7-TRIM-BLK	7" Square snap on trim black
SLDSKSQ-7-TRIM-BRZ	7" Square snap on trim bronze
SLDSKSQ-7-TRIM-BNI	7" Square snap on trim brushed nickel
SLDSKSQ-12-TRIM-BLK	12" Square snap on trim black
SLDSKSQ-12-TRIM-BRZ	12" Square snap on trim bronze
SLDSKSQ-12-TRIM-BNI	12" Square snap on trim brushed nickel



-BLK


Converter Clips

Box Qty.
4 - 20
7 - 50 - 12 - 50

Model	Description
SLDSK-4CLIP	SLDSK-5: 4" Recessed Can Converter
SLDSK-7-6CLIP	SLDSK-7: 7" Recessed Can Converter
SLDSK-12-6CLIP	SLDSK-12: 7" Recessed Can Converter



-BNI

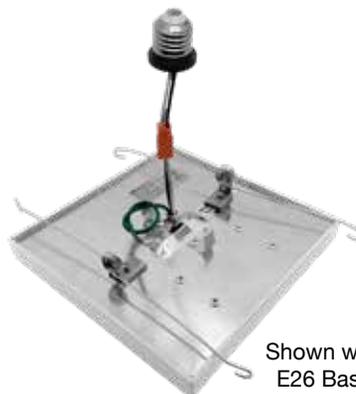

Shown with E26 Base



-BRZ



4" Cusp Disk Downlight - 5-CCT

Box Qty. 20

Model	Voltage	Watts	Beam	Dimming	CCT
NEW LED-CDSK-4-9W-5CCT-WH	120V	9w	100°	Triac/ELV	27/30/35/40/50k
NEW LED-CDSK-4-9W-5CCT-BZ	120V	9w	100°	Triac/ELV	27/30/35/40/50k
LED-CDSK-4-10W-5CCT-WH	120V	10w	100°	Triac/ELV	27/30/35/40/50k
LED-CDSK-4-10W-5CCT-BZ	120V	10w	100°	Triac/ELV	27/30/35/40/50k
LED-CDSK-4-10W-TRI-BN	120V	10w	100°	Triac/ELV	30//40/50k

4-9W		4-10W	
WATT	LUMENS	WATT	LUMENS
9	700	10	650

6" Cusp Disk Downlight: EcoValue - 5-CCT

Box Qty. 20

Model	Voltage	Watts	Beam	Dimming	CCT
ECV-DSM-6-15W-5CCT-WH	120V	15w	100°	Triac/ELV	27/30/35/40/50k

WATT	LUMENS
15	1,000

6" Cusp Disk Downlight - 5-CCT

Box Qty. 20

Model	Voltage	Watts	Beam	Dimming	CCT
NEW LED-CDSK-6-11W-5CCT-WH	120V	11w	100°	Triac/ELV	27/30/35/40/50k
NEW LED-CDSK-6-11W-5CCT-BZ	120V	11w	100°	Triac/ELV	27/30/35/40/50k
NEW LED-CDSK-6-11W-5CCT-BLK	120V	11w	100°	Triac/ELV	27/30/35/40/50k
LED-CDSK-6-15W-5CCT-WH	120V	15w	100°	Triac/ELV	27/30/35/40/50k
LED-CDSK-6-15W-5CCT-BZ	120V	15w	100°	Triac/ELV	27/30/35/40/50k
LED-CDSK-6-15W-5CCT-BLK	120V	15w	100°	Triac/ELV	27/30/35/40/50k
LED-CDSK-6-15W-TRI-BN	120V	15w	100°	Triac/ELV	30/40/50k

6-11W		6-15W	
WATT	LUMENS	WATT	LUMENS
11	1,000	15	1,000

Converter Clips

Model	Description
CDSK-4-CLIP	CDSK-4: 4" Recessed Can Converter
CDSK-6-CLIP	CDSK-6: 6" Recessed Can Converter

8" Cusp Disk Downlight - 5-CCT

Box Qty. 20

Model	Voltage	Watts	Beam	Dimming	CCT
LED-CDSK-8-27W-5CCT-WH	120V	27w	100°	Triac/ELV	27/30/35/40/50k

WATT	LUMENS
27	2,100

3-CCT, 3-Power

Box Qty. 20

Model	Voltage	Watts	Beam	Dimming	CCT
NEW LED-CDSK-8-3P27-5CCT-WH	120V	27/24/20w	100°	Triac/ELV	27/30/35/40/50k

WATT	LUMENS
20	1,440
24	1,800
27	2,100

3-CCT, 3-Power

Box Qty. 20

Model	Voltage	Watts	Beam	Dimming	CCT
NEW LED-CDSK-8-27W-5CCT-WH	120V	35/30/25w	100°	Triac/ELV	27/30/35/40/50k

WATT	LUMENS
25	2,000
30	2,400
35	2,800

12" Cusp Disk Downlight - 5-CCT

Box Qty. 20

Model	Voltage	Watts	Beam	Dimming	CCT
LED-CDSK-12-3P35-5CCT-WH	120V	35/30/25w	100°	Triac/ELV	27/30/35/40/50k

WATT	LUMENS
25	2,000
30	2,400
35	2,800





Shown with E26 Base

Cusp Disk w/ PIR Sensor - 5-CCT

- Motion sensor turns off after one minute
- Compatible with 30/40 junction box or E26 recessed can installation
- Motion sensor selectable ON/OFF after 30 seconds/1min./3min.
- Closet rated

JAB TITLE 24 COMPLIANT Box Qty. 20

Model	Voltage	Watts	Beam	Dimming	CCT
LED-CDSK-4-10W-5CCT-WH-PIR	120V	10w	100°	Triac/ELV	27/30/35/40/50k
LED-CDSK-6-15W-5CCT-WH-PIR	120V	15w	100°	Triac/ELV	27/30/35/40/50k

4-10W		6-15W	
WATT	LUMENS	WATT	LUMENS
10	650	15	1,000

Cusp Disk w/ PIR Sensor 3 Settings - 5-CCT

JAB TITLE 24 COMPLIANT Box Qty. 20

Model	Voltage	Watts	Beam	Dimming	CCT
LED-CDSK-4-10W-5CCT-WH-3SPIR	120V	10w	100°	Triac/ELV	27/30/35/40/50k
LED-CDSK-6-14W-5CCT-WH-3SPIR	120V	14w	100°	Triac/ELV	27/30/35/40/50k

4-10W		6-14W	
WATT	LUMENS	WATT	LUMENS
10	650	14	1,000



-WH

-BL

Cylinder Downlight: Snaptrim Model - 5-CCT

JAB TITLE 24 COMPLIANT Box Qty. 18

Model	Voltage	Watts	Beam	Dimming	CCT
LED-DLJBX-3-CYL-ADJ-5CCT-WH	120V	15w	100°	Triac/ELV	27/30/35/40/50k
LED-DLJBX-3-CYL-ADJ-5CCT-BL	120V	15w	100°	Triac/ELV	27/30/35/40/50k

WATT	LUMENS
15	1,000

Up to 90° Angle



-WH

-BL

2'/4'/6' Pendant Stem Mount

- Finishes: White or Black Standard
- Custom options available
- Angle Adjustable Stem
- Housing: Die-cast

Box Qty. 6

Model	Description
STM-JBX-6-WH	Stem pendant mount for surface mount fixtures
STM-JBX-6-BLK	Stem pendant mount for surface mount fixtures



CACM Cylinder Modules: ARCY - 5-CCT, 3-Power 3" Models


Box Qty. 6

Model	Voltage	Watts	Beam	Dimming	CCT
LED-CACM-3-3P15-5CCT-WH-UNV	120-277V	15/10/5w	25-80°	0-10/Triac/ELV	27/30/35/40/50k
LED-CACM-3-3P15-5CCT-BL-UNV	120-277V	15/10/5w	25-80°	0-10/Triac/ELV	27/30/35/40/50k

WATT	LUMENS
5	500
10	950
15	1,400



Adjustable Beam
3": 25°-80°

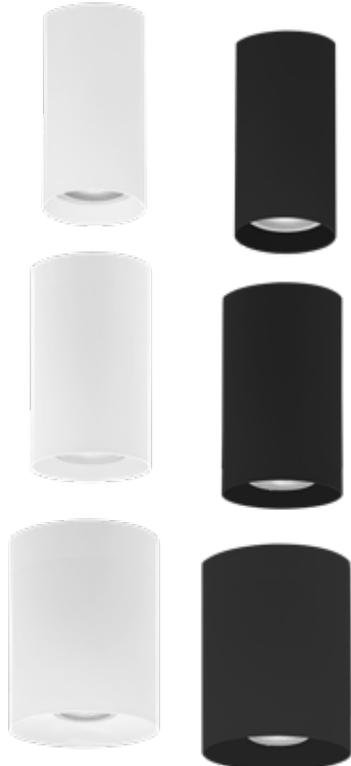

4" Models

SELECT SWITCH DIMMABLE 9 HIGH CRI Box Qty. 6


Model	Voltage	Watts	Beam	Dimming	CCT
LED-CACM-4-3P15-5CCT-WH-UNV	120-277V	15/10/5w	30-60°	0-10/Triac/ELV	27/30/35/40/50k
LED-CACM-4-3P15-5CCT-BL-UNV	120-277V	15/10/5w	30-60°	0-10/Triac/ELV	27/30/35/40/50k
LED-CACM-4-3P25-5CCT-WH-UNV	120-277V	25/20/10w	30-60°	0-10/Triac/ELV	27/30/35/40/50k
LED-CACM-4-3P25-5CCT-BL-UNV	120-277V	25/20/10w	30-60°	0-10/Triac/ELV	27/30/35/40/50k

3P15	
WATT	LUMENS
5	500
10	950
15	1,400

3P25	
WATT	LUMENS
10	1,000
20	2,000
25	2,500



Adjustable Beam
4": 35°-60°

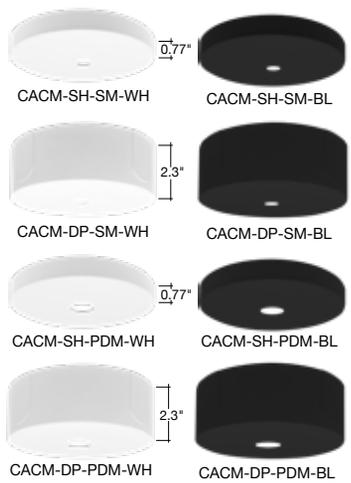

6" Models

SELECT SWITCH DIMMABLE 9 HIGH CRI Box Qty. 6


Model	Voltage	Watts	Beam	Dimming	CCT
LED-CACM-6-3P25-5CCT-WH-UNV	120-277V	25/20/10	35-60°	0-10/Triac/ELV	27/30/35/40/50k
LED-CACM-6-3P25-5CCT-BL-UNV	120-277V	25/20/10	35-60°	0-10/Triac/ELV	27/30/35/40/50k
LED-CACM-6-3P40-5CCT-WH-UNV	120-277V	40/35/30w	30-60°	0-10/Triac/ELV	27/30/35/40/50k
LED-CACM-6-3P40-5CCT-BL-UNV	120-277V	40/35/30w	30-60°	0-10/Triac/ELV	27/30/35/40/50k

3P25	
WATT	LUMENS
10	1,000
20	2,000
25	2,500

3P40	
WATT	LUMENS
30	3,000
35	3,500
40	4,000



Adjustable Beam
6": 35°-60°

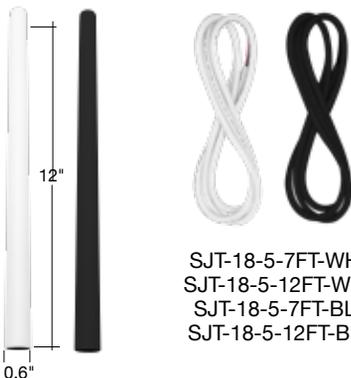

SJT-18-5-7FT-WH
SJT-18-5-12FT-WH
SJT-18-5-7FT-BL
SJT-18-5-12FT-BL

Canopy Kits

Model	Description
CACM-SH-SM-WH	Surface Mount Canopy 0.75" Height
CACM-SH-SM-BL	Surface Mount Canopy 0.75" Height
CACM-DP-SM-WH	Surface Mount Canopy 2.3" Height for J-box/ Pipe
CACM-DP-SM-BL	Surface Mount Canopy 2.3" Height for J-box/ Pipe
CACM-SH-PDM-WH	"Pendant Canopy 0.75"" Height: Fixed or Slanted"
CACM-SH-PDM-BL	"Pendant Canopy 0.75"" Height: Fixed or Slanted"
CACM-DP-PDM-WH	Pendant Canopy 2.3" Height: Fixed or Slanted J-box for pipe or EMB
CACM-DP-PDM-BL	Pendant Canopy 2.3" Height: Fixed or Slanted J-box for pipe or EMB

Cord Stems

Model	Description
CACM-STM-1FT-WH	1ft Stem Mount - (Connect up to 11ft)
CACM-STM-1FT-BL	1ft Stem Mount - (Connect up to 11ft)

Pendant Mount SJT Cords

Model	Description
SJT-18-5-7FT-WH	7' 5-Wire White Cord
SJT-18-5-7FT-BL	7' 5-Wire Black Cord
SJT-18-5-12FT-WH	12' 5-Wire White Cord
SJT-18-5-12FT-BL	12' 5-Wire Black Cord

Factory Install Options	Description
Add '-EMB' to model #	90 Minute Emergency Backup
Add: '-7FT' to Model #	7' 5-Wire Cord preinstalled
Add: '-12FT' to Model #	12' 5-Wire Cord preinstalled



STEM HUNG
CORD HUNG
SURFACE MOUNT



E.T.A. 04/2026

**Regressed Lens - 30/40 J-Box
5-CCT**

JAS TITLE 24 COMPLIANT Box Qty. 18

NEW

Model	Voltage	Watts	Beam	Dimming	CCT
LED-DSD-RG-4-11W-5CCT-WH	120V	11w	100°	Triac/ELV	27/30/35/40/50k



WATT	LUMENS
11	900



E.T.A. 04/2026

**Flat Lens - 40 J-Box
5-CCT**

JAS TITLE 24 COMPLIANT Box Qty. 18

NEW

Model	Voltage	Watts	Beam	Dimming	CCT
LED-DSD-FL-4-11W-5CCT-WH	120V	11w	100°	Triac/ELV	27/30/35/40/50k



WATT	LUMENS
11	900



E.T.A. 06/2026

**Anti-Glare Regressed: - 40 J-Box
5-CCT**

JAS TITLE 24 COMPLIANT Box Qty. 18

NEW

Model	Voltage	Watts	Beam	Dimming	CCT
LED-DSD-AG-4-11W-5CCT-WH	120V	11w	100°	Triac/ELV	27/30/35/40/50k



WATT	LUMENS
11	1,000



E.T.A. 06/2026

**Trimless Regressed: - 40 J-Box
5-CCT**

JAS TITLE 24 COMPLIANT Box Qty. 18

NEW

Model	Voltage	Watts	Beam	Dimming	CCT
LED-DSD-TML-4-11W-5CCT-WH	120V	11w	100°	Triac/ELV	27/30/35/40/50k




WATT	LUMENS
11	900



**22" / 33" / 45" Full Throw
Vanity Light - 5-CCT, 3-Power**

FC JA8 TITLE 24 Box Qty. 10

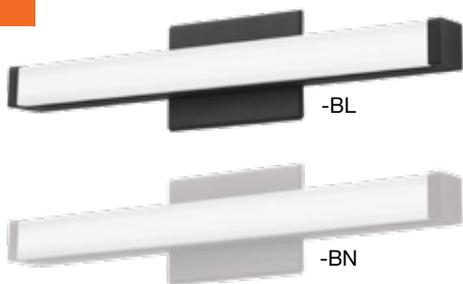


Model	Voltage	Watts	CCT
LED-VT-SQFT-22-3P19-5CCT-BL	120-277V	19/15/9w	27/30/35/40/50k
LED-VT-SQFT-22-3P19-5CCT-BN	120-277V	19/15/9w	27/30/35/40/50k
LED-VT-SQFT-33-3P30-5CCT-BL	120-277V	30/23/19w	27/30/35/40/50k
LED-VT-SQFT-33-3P30-5CCT-BN	120-277V	30/23/19w	27/30/35/40/50k
LED-VT-SQFT-45-3P36-5CCT-BL	120-277V	36/29/22w	27/30/35/40/50k
LED-VT-SQFT-45-3P36-5CCT-BN	120-277V	36/29/22w	27/30/35/40/50k



3P19		3P30		3P30	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
9	800	19	1,600	22	2,000
15	1,200	23	2,000	29	2,500
19	1,600	30	2,600	36	3,000

Vanity Light - Adjustable Angle - 5-CCT



FC JA8 TITLE 24 Box Qty. 10

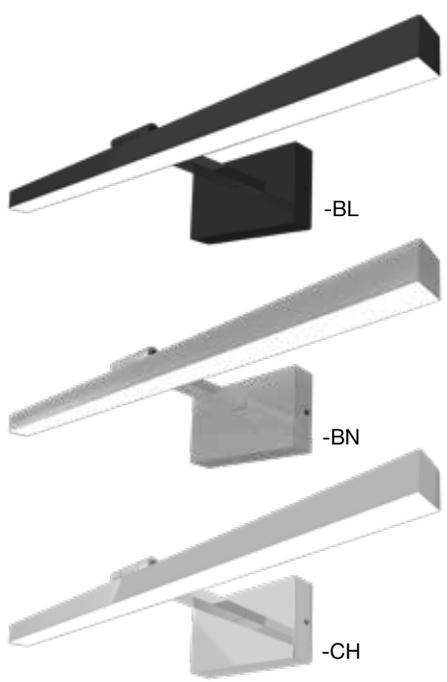

Model	Voltage	Watts	CCT
LED-VT-ADJ-24-21W-5CCT-BL	120V	21w	27/30/35/40/50k
LED-VT-ADJ-24-21W-5CCT-BN	120V	21w	27/30/35/40/50k
LED-VT-ADJ-24-21W-5CCT-CH	120V	21w	27/30/35/40/50k




WATT	LUMENS
21	2,700

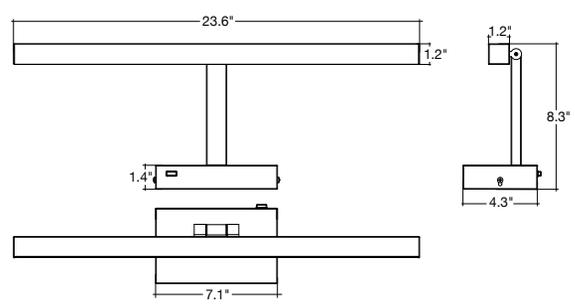

Vanity Light - Indirect - 5-CCT


FC JA8 TITLE 24 Box Qty. 10

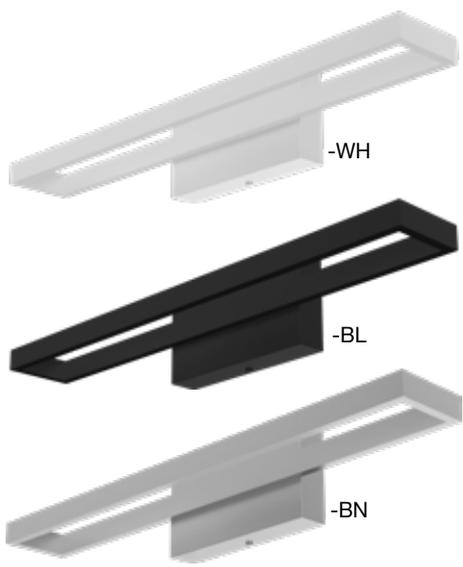


Model	Voltage	Watts	CCT
LED-VT-ID-24-21W-5CCT-WH	120V	21w	27/30/35/40/50k
LED-VT-ID-24-21W-5CCT-BL	120V	21w	27/30/35/40/50k
LED-VT-ID-24-21W-5CCT-BN	120V	21w	27/30/35/40/50k



WATT	LUMENS
21	2,700

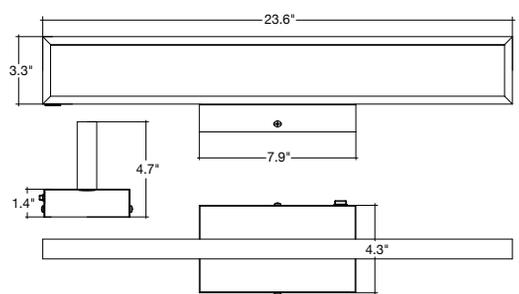

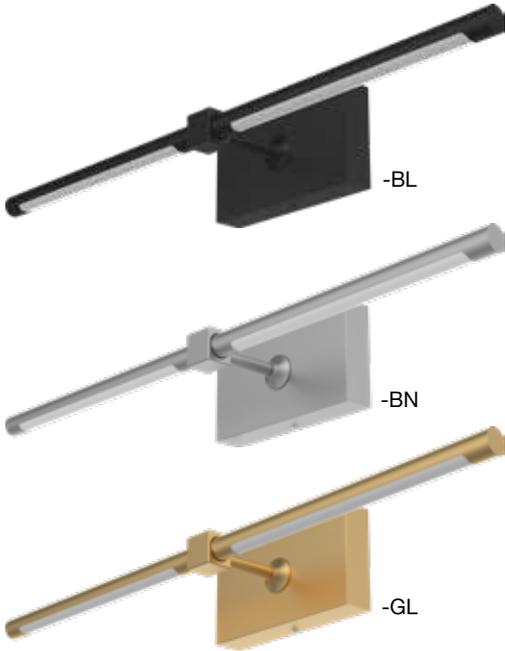


Vanity Light - Contemporary Round - 5-CCT



FC JA8 TITLE 24 COMPLIANT Box Qty. 10

Model	Voltage	Watts	CCT
LED-VT-CRD-29-21W-5CCT-BL	120V	21w	27/30/35/40/50k
LED-VT-CRD-29-21W-5CCT-BN	120V	21w	27/30/35/40/50k
LED-VT-CRD-29-21W-5CCT-GL	120V	21w	27/30/35/40/50k

WATT	LUMENS
21	2,700

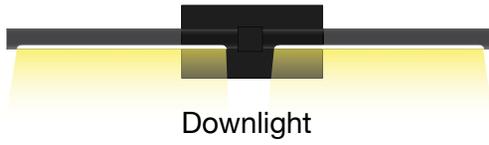

Downlight

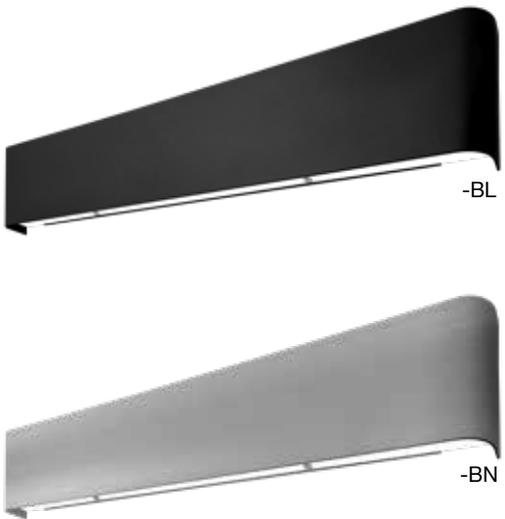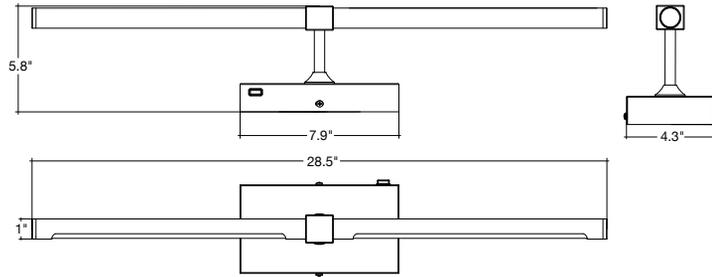

Vanity Light - Up & Down Light - 5-CCT


FC JA8 TITLE 24 COMPLIANT Box Qty. 10

Model	Voltage	Watts	CCT
LED-VT-WUP-24-21W-5CCT-BL	120V	21w	27/30/35/40/50k
LED-VT-WUP-24-21W-5CCT-BN	120V	21w	27/30/35/40/50k

WATT	LUMENS
21	1,800



Up and Down Light

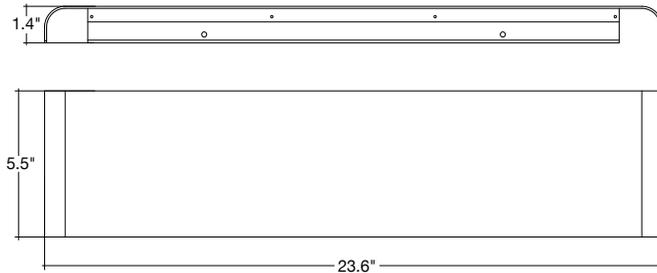



Track Lights H - 5-CCT

Box Qty.
30D- 24
36D- 12



Model	Voltage	Watts	Beam	Dimming	CCT
LED-ATH-10W-5CCT-30D-WH	120V	10w	30°	Triac/ELV	27/30/35/40/50k
LED-ATH-10W-5CCT-30D-BLK	120V	10w	30°	Triac/ELV	27/30/35/40/50k
LED-ATH-20W-5CCT-36D-WH	120V	20w	36°	Triac/ELV	27/30/35/40/50k
LED-ATH-20W-5CCT-36D-BLK	120V	20w	36°	Triac/ELV	27/30/35/40/50k
LED-ATH-30W-5CCT-36D-WH	120V	30w	36°	Triac/ELV	27/30/35/40/50k
LED-ATH-30W-5CCT-36D-BLK	120V	30w	36°	Triac/ELV	27/30/35/40/50k

10W		20W		30W	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
10	1,000	10	2,000	30	3,000

Box Qty.
30D- 24
36D- 12



Track Lights J & H - 5-CCT

NEW

Model	Voltage	Watts	Beam	Dimming	CCT
LED-AT-JH-10W-5CCT-30D-WH	120V	10w	30°	Triac/ELV	27/30/35/40/50k
LED-AT-JH-10W-5CCT-30D-BLK	120V	10w	30°	Triac/ELV	27/30/35/40/50k
LED-AT-JH-20W-5CCT-36D-WH	120V	20w	36°	Triac/ELV	27/30/35/40/50k
LED-AT-JH-20W-5CCT-36D-BLK	120V	20w	36°	Triac/ELV	27/30/35/40/50k
LED-AT-JH-30W-5CCT-36D-WH	120V	30w	36°	Triac/ELV	27/30/35/40/50k
LED-AT-JH-30W-5CCT-36D-BLK	120V	30w	36°	Triac/ELV	27/30/35/40/50k

10W		20W		30W	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
10	1,000	10	2,000	30	3,000



Beam Lens

Box Qty.
12

Single Circuit 3-Wire Track


Box Qty.
12

Model	Description	Model	Description
ATH-10W-24D	Track heads: ACRY-line 24D Beam	TS3-2FT-SM-WH	2' Track 3-wire
ATH-10W-60D	Track heads: ACRY-line 60D Beam	TS3-2FT-SM-BL	2' Track 3-wire
ATH-20W-24D	Track heads: ACRY-line 24D Beam	TS3-4FT-SM-WH	4' Track 3-wire
ATH-20W-60D	Track heads: ACRY-line 60D Beam	TS3-4FT-SM-BL	4' Track 3-wire
ATH-30W-24D	Track heads: ACRY-line 24D Beam	TS3-8FT-SM-WH	8' Track 3-wire
ATH-30W-60D	Track heads: ACRY-line 60D Beam	TS3-8FT-SM-BL	8' Track 3-wire
Replace: -24D to Model #	Factory installed 24D Beam		
Replace: -60D to Model #	Factory installed 60D Beam		

Track Accessories



Model	Description
TS3-SM-LIVE-WH	Live end: Required to start a run
TS3-SM-LIVE-BL	Live end: Required to start a run
TS3-SM-CD-WH	Conduit Power Feed: 3-wire power connector with conduit
TS3-SM-CD-BL	Conduit Power Feed: 3-wire power connector with conduit
TS3-SM-END-WH	End cap: Required to end a run
TS3-SM-END-BL	End cap: Required to end a run
TS3-SM-MJ-WH	Mini joiner: Low profile joiner for two straight track sections
TS3-SM-MJ-BL	Mini joiner: Low profile joiner for two straight track sections
TS3-SM-SC-WH	Straight connector: Connect two track sections end to end with a center
TS3-SM-SC-BL	Straight connector: Connect two track sections end to end with a center
TS3-SM-L-WH	L-Connector: Connect two track sections at a right angle
TS3-SM-L-BL	L-Connector: Connect two track sections at a right angle
TS3-SM-T-WH	T-Connector: Connect two track sections at a T angle
TS3-SM-T-BL	T-Connector: Connect two track sections at a T angle
TS3-SM-X-WH	X-Connector: Connect two track sections at an cross angle
TS3-SM-X-BL	X-Connector: Connect two track sections at an cross angle
TS3-SM-FLX-WH	Flexible Connector: Connect two track sections at any angle up to 90°
TS3-SM-FLX-BL	Flexible Connector: Connect two track sections at any angle up to 90°
TS3-SM-FC-WH	Floating Canopy: Track can be connected to existing outlet box along the track.
TS3-SM-FC-BL	Floating Canopy: Track can be connected to existing outlet box along the track.

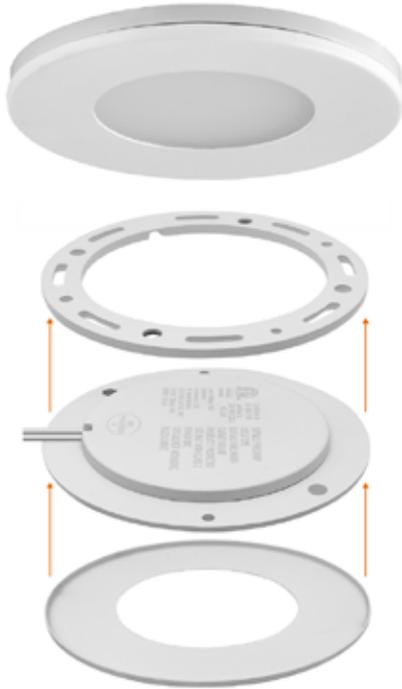

Undercabinet Puck Light - Single CCT

- Mounting options include either recessed or surface mounted
- Embedded magnets allow for easily interchangeable face plate
- Split-wire connectors allow easy daisy-chaining of fixtures
- Dimmable with electronic constant voltage transformer. Do not use magnetic system.
- 5-100% dimming with compatible electronic dimming drivers (See CV drivers)

Box Qty. 100

Model	Voltage	Watts	CCT
LED-PCK-3W-27K-12V	12V	3w	2700k
LED-PCK-3W-30K-12V	12V	3w	3000k
LED-PCK-3W-40K-12V	12V	3w	4000k
LED-PCK-3W-50K-12V	12V	3w	5000k
LED-PCK-3W-27K-24V	24V	3w	2700k
LED-PCK-3W-30K-24V	24V	3w	3000k

WATT	LUMENS
3	300

Undercabinet Puck Light Accessories

Box Qty. 10



Model	Description
LED-PCK-TRIM-BRZ	Undercabinet puck trim (bronze)
LED-PCK-TRIM-BLK	Undercabinet puck trim (black)
LED-PCK-TRIM-SL	Undercabinet puck trim (silver)
LED-PCK-TRIM-BNI	Undercabinet puck trim (nickel)
LED-PCK-TRIM-CP	Undercabinet puck trim (copper)
ET-12V-12W	12W undercabinet transformer



Work Light High Bay - 5000K

FC  Box Qty. 4

Model	Voltage	Watts	CCT
LED-WKL-60W-50K-15	120V	60w	5000k
LED-WKL-100W-50K-35	120V	100w	5000k
LED-WKL-150W-50K-35	120V	150w	5000k



60W		100W		150W	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
60	7,800	100	13,000	150	26,000



Work String Lights - 5 Piece

FC  Box Qty. 8

Model	Voltage	Watts	CCT
LED-WKL-SL-5-80W-50K	120V	80w	5000k
LED-WKL-SL-10-160W-50K	120V	160w	5000k

80W		160W	
WATT	LUMENS	WATT	LUMENS
80	10,000	160	20,000







End Connectors

Daisy chain multiple fixtures


Edge-Lit Technology

Produces uniform, diffuse light

Hardware Knockouts

No external wiring necessary

- Toggles between selectable colors, as well as high & low light intensity modes
- Frosted lens will not yellow or deform over time
- Use jumper connectors to daisy-chain multiple fixtures
- Compatible with most dimmers (e.g. Lutron DVCL-153P)
- Install as a hardwire or use included power cord
- Built-in screws in the front make installation easy

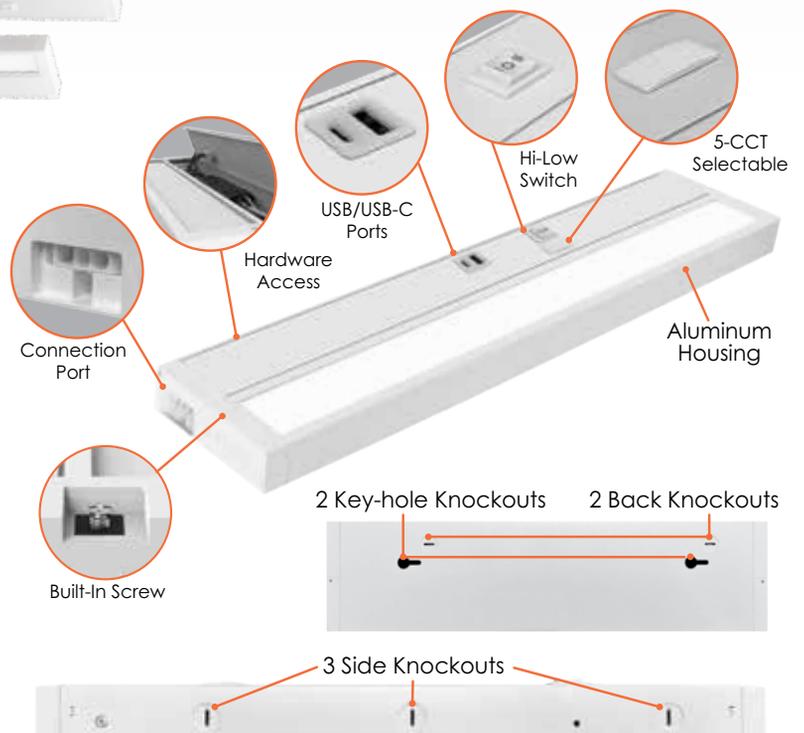



Undercabinet Bar Light - 5-CCT, Triac Dimmable Box Qty. 8, 11, 14- 12
TITLE 24 22, 28, 33, 42- 6

Model	Voltage	Watts	Lumens	CCT
LED-UC-8I-4W-5CCT-WH	120V	4w	180	27/30/35/40/50k
LED-UC-11I-6W-5CCT-WH	120V	6w	350	27/30/35/40/50k
LED-UC-14I-8W-5CCT-WH	120V	8w	570	27/30/35/40/50k
LED-UC-22I-10W-5CCT-WH	120V	10w	750	27/30/35/40/50k
LED-UC-28I-12W-5CCT-WH	120V	12w	900	27/30/35/40/50k
LED-UC-33I-15W-5CCT-WH	120V	15w	1,050	27/30/35/40/50k
LED-UC-42I-18W-5CCT-WH	120V	18w	1,250	27/30/35/40/50k
LED-UC-8I-4W-5CCT-BZ	120V	4w	180	27/30/35/40/50k
LED-UC-11I-6W-5CCT-BZ	120V	6w	350	27/30/35/40/50k
LED-UC-14I-8W-5CCT-BZ	120V	8w	570	27/30/35/40/50k
LED-UC-22I-10W-5CCT-BZ	120V	10w	750	27/30/35/40/50k
LED-UC-28I-12W-5CCT-BZ	120V	12w	900	27/30/35/40/50k
LED-UC-33I-15W-5CCT-BZ	120V	15w	1,050	27/30/35/40/50k
LED-UC-42I-18W-5CCT-BZ	120V	18w	1,250	27/30/35/40/50k



5-CCT, USB & USB-C, Triac Dimmable

Model	Voltage	Watts	Lumens	CCT
LED-UC-11I-6W-5CCT-USB-WH	120V	6w	350	27/30/35/40/50k
LED-UC-14I-8W-5CCT-USB-WH	120V	8w	570	27/30/35/40/50k
LED-UC-22I-10W-5CCT-USB-WH	120V	10w	750	27/30/35/40/50k
LED-UC-28I-12W-5CCT-USB-WH	120V	12w	900	27/30/35/40/50k
LED-UC-42I-18W-5CCT-USB-WH	120V	18w	1,250	27/30/35/40/50k



5-CCT, USB & USB-C, 0-10V Dimmable

Model	Voltage	Watts	Lumens	CCT
LED-UC-14I-8W-5CCT-USB-WH-UNV	120-277V	8w	570	27/30/35/40/50k
LED-UC-22I-10W-5CCT-USB-WH-UNV	120-277V	10w	750	27/30/35/40/50k
LED-UC-28I-12W-5CCT-USB-WH-UNV	120-277V	12w	900	27/30/35/40/50k
LED-UC-42I-18W-5CCT-USB-WH-UNV	120-277V	18w	1,250	27/30/35/40/50k



3-CCT, Triac Dimmable

Model	Voltage	Watts	Lumens	CCT
LED-UC-8I-4W-TRI-W	120V	4w	180	30/40/50k
LED-UC-11I-6W-TRI-W	120V	6w	350	30/40/50k
LED-UC-14I-8W-TRI-W	120V	8w	570	30/40/50k
LED-UC-28I-12W-TRI-B	120V	12w	900	30/40/50k



3000K, Triac Dimmable

Model	Voltage	Watts	Lumens	CCT
LED-UC-11I-6W-30K-W	120V	6w	350	3000k
LED-UC-28I-12W-30K-B	120V	12w	900	3000k
LED-UC-42I-18W-30K-W	120V	18w	1,250	3000k
LED-UC-42I-18W-30K-B	120V	18w	1,250	3000k

Included in the box	Optional Accessories
Joiner 3/8" Connector Screws & Anchors	UC Jumper PC-Power Cable UC-JBOX

Model	Description	Model	Description
UC-JUMPER-6"-W	6" UC jumper	UC-JUMPER-24"-B	24" UC jumper
UC-JUMPER-12"-W	12" UC jumper	UC-5'-PC-WH	5' Power cable
UC-JUMPER-24"-W	24" UC jumper	UC-5'-PC-BZ	5' Power cable
UC-JUMPER-6"-B	6" UC jumper	UC-JBOX	Undercabinet junction box
UC-JUMPER-12"-B	12" UC jumper		

Undercabinet Fixtures: C-Line (Economical Models) - Hardwire Only
5-CCT, Triac Dimmable

Box Qty. 11, 18- 24
TITLE 24 24, 36, 42- 12

Model	Voltage	Watts	Lumens	CCT
LED-EUC-11I-6W-5CCT-WH	120V	6w	450	27/30/35/40/50k
LED-EUC-18I-8W-5CCT-WH	120V	8w	600	27/30/35/40/50k
LED-EUC-24I-12W-5CCT-WH	120V	12w	900	27/30/35/40/50k
LED-EUC-36I-15W-5CCT-WH	120V	15w	1,125	27/30/35/40/50k
LED-EUC-42I-18W-5CCT-WH	120V	18w	1,350	27/30/35/40/50k





Landscape Floods - Solid Brass

Box Qty.
SM-SQ - 12
SM-RD - 10
LG-RD - 5

Model	Voltage	Finish	Bulb
FL-SM-SQ-BR-ORB-12V	12V	Oil Rubbed Bronze	G4
FL-SM-SQ-BR-MBL-12V	12V	Matte Black	G4
FL-SM-RD-BR-ORB-12V	12V	Oil Rubbed Bronze	G4
FL-SM-RD-BR-MBL-12V	12V	Matte Black	G4
FL-LG-RD-BR-ORB-12V	12V	Oil Rubbed Bronze	PAR-36
FL-LG-RD-BR-MBL-12V	12V	Matte Black	PAR-36

Spike Included



Low Voltage: Bullet Spot Lights - Solid Brass

Box Qty.
10

Model	Voltage	Finish	Bulb
BLT-BR-ORB-12V-1	12V	Oil Rubbed Bronze	MR-11
BLT-BR-MBL-12V-1	12V	Matte Black	MR-11
BLT-BR-ORB-12V-2	12V	Oil Rubbed Bronze	MR-16
BLT-BR-MBL-12V-2	12V	Matte Black	MR-16
BLT-BR-ORB-12V-3	12V	Oil Rubbed Bronze	MR-16
BLT-BR-MBL-12V-3	12V	Matte Black	MR-16
BLT-BR-ORB-12V-4	12V	Oil Rubbed Bronze	MR-16
BLT-BR-MBL-12V-4	12V	Matte Black	MR-16

Spike Included



Low Voltage: MR-16 Bullet Spot Lights - Aluminum

Box Qty.
10

Model	Voltage	Finish	Bulb
BLT-ALM-BZ-12V-2	12V	Bronze	MR-16
BLT-ALM-BL-12V-2	12V	Black	MR-16
BLT-ALM-BZ-12V-3	12V	Bronze	MR-16
BLT-ALM-BL-12V-3	12V	Black	MR-16

Spike Included



Low Voltage: Bullet Flood Lights - Aluminum

Box Qty.
24

Model	Voltage	Watts	CCT
LED-BLF-5W-RGB+5CCT-ALM-BZ-LV	12-24V AC/DC	5w	27/30/35/40/50k
LED-BLF-5W-RGB+5CCT-ALM-BL-LV	12-24V AC/DC	5w	27/30/35/40/50k
LED-BLS-5W-RGB+5CCT-ALM-BZ-LV	12-24V AC/DC	5w	27/30/35/40/50k
LED-BLS-5W-RGB+5CCT-ALM-BL-LV	12-24V AC/DC	5w	27/30/35/40/50k

BLF-5W		BLS-5W	
WATT	LUMENS	WATT	LUMENS
5	300	5	450

Spike Included



17 SCENE OPTIONS

2700K		RED/GREEN/BLUE + 2 Second Smooth Color Change
3000K		RED/GREEN/BLUE + 2 Second Flash Color Change
3500K		ALL COLORS + 2 Second Smooth Color Change
4000K		ALL COLORS + 2 Second Flash Color Change
5000K		ALL COLORS + 2 Second Smooth Color Change
WHITE		ALL COLORS + 2 Second Flash Color Change
RED		ALL COLORS + 2 Second Smooth Color Change
GREEN		ALL COLORS + 2 Second Flash Color Change
BLUE		OFF
ORANGE		
PURPLE		
CYAN		



-ORB -MBL



Spike Included

Landscape Path Light Stem - 12"/24" Height - Solid Brass

Box Qty. 10

Model	Voltage	Finish	Bulb
PL-12-BR-ORB-12V	12V	Oil Rubbed Bronze	G4
PL-24-BR-ORB-12V	12V	Oil Rubbed Bronze	G4
PL-12-BR-MBL-12V	12V	Matte Black	G4
PL-24-BR-MBL-12V	12V	Matte Black	G4



Path Light Caps - Solid Brass

Box Qty. 10

Model	Finish
PL-H-BR-ORB-1	Oil Rubbed Bronze
PL-H-BR-ORB-2	Oil Rubbed Bronze
PL-H-BR-ORB-3	Oil Rubbed Bronze
PL-H-BR-MBL-1	Matte Black
PL-H-BR-MBL-2	Matte Black
PL-H-BR-MBL-3	Matte Black



-ORB -MBL

Low Voltage: Path Lights (Spot Style) - Solid Brass

Box Qty. 10

Model	Voltage	Finish	Bulb
PL-S-24-BR-ORB-12V	12V	Oil Rubbed Bronze	G4
PL-S-24-BR-MBL-12V	12V	Matte Black	G4



Spike Included



-ORB -MBL

Low Voltage: Path Lights (L Shape) - Solid Brass

Box Qty. 10

Model	Voltage	Finish	Bulb
PL-L-22-BR-ORB-12V	12V	Oil Rubbed Bronze	G4
PL-L-22-BR-MBL-12V	12V	Matte Black	G4



Spike Included



Landscape Path Light Stem - 12"/24" Height - Aluminum Box Qty. 10

Model	Voltage	Finish	Bulb
PL-12-ALM-BZ-12V	12V	Bronze	G4
PL-24-ALM-BZ-12V	12V	Bronze	G4
PL-12-ALM-BL-12V	12V	Black	G4
PL-24-ALM-BL-12V	12V	Black	G4



Path Light Caps - Aluminum Box Qty. 10

Model	Finish
PL-H-ALM-BZ-1	Bronze
PL-H-ALM-BZ-2	Bronze
PL-H-ALM-BZ-3	Bronze
PL-H-ALM-BL-1	Black
PL-H-ALM-BL-2	Black
PL-H-ALM-BL-3	Black



Landscape Path Light Stem - 21" Height - Aluminum Box Qty. 25

Model	Voltage	Watts	CCT
LED-PL-21-5W-RGB+5CCT-ALM-BZ-LV	12-24V AC/DC	5w	27/30/35/40/50k
LED-PL-21-5W-RGB+5CCT-ALM-BL-LV	12-24V AC/DC	5w	27/30/35/40/50k

WATT	LUMENS
5	200



Path Light Caps - Aluminum Box Qty. 48

Model	Finish
PL-H-ALM-BZ-TR	Bronze
PL-H-ALM-BZ-FL	Bronze
PL-H-ALM-BZ-DM	Bronze
PL-H-ALM-BZ-DC	Bronze
PL-H-ALM-BZ-TX	Bronze
PL-H-ALM-BZ-DT	Bronze
PL-H-ALM-BL-TR	Black
PL-H-ALM-BL-FL	Black
PL-H-ALM-BL-DM	Black
PL-H-ALM-BL-DC	Black
PL-H-ALM-BL-TX	Black
PL-H-ALM-BL-DT	Black

17 SCENE OPTIONS

2700K		RED/GREEN/BLUE	
3000K		+ 2 Second Smooth Color Change	
3500K		RED/GREEN/BLUE	
4000K		+ 2 Second Flash Color Change	
5000K		ALL COLORS	
WHITE		+ 2 Second Smooth Color Change	
RED		ALL COLORS	
GREEN		+ 2 Second Smooth Color Change	
BLUE		+ 2 Second Flash Color Change	
ORANGE		OFF	
PURPLE			
CYAN			

Path Light L-Shape Style - 22" Height - Aluminum

Box Qty. **10**

Model	Voltage	Finish	Bulb
PL-L-22-ALM-BZ-12V	12V	Bronze	G4
PL-L-22-ALM-BL-12V	12V	Black	G4



Landscape Path Light L-Shape - 21" Height - Aluminum

Box Qty. **12**

Model	Voltage	Watts	CCT
LED-PL-L-21-5W-RGB+5CCT-ALM-BZ-LV	12-24V AC/DC	5w	27/30/35/40/50k
LED-PL-L-21-5W-RGB+5CCT-ALM-BL-LV	12-24V AC/DC	5w	27/30/35/40/50k



RGB+CW

17 SCENE OPTIONS

2700K		RED/GREEN/BLUE * 2 Second Smooth Color Change
3000K		RED/GREEN/BLUE * 2 Second Smooth Color Change
3500K		RED/GREEN/BLUE * 2 Second Flash Color Change
4000K		RED/GREEN/BLUE * 2 Second Flash Color Change
5000K		ALL COLORS * 2 Second Smooth Color Change
WHITE		ALL COLORS * 2 Second Smooth Color Change
RED		ALL COLORS * 2 Second Smooth Color Change
GREEN		ALL COLORS * 2 Second Smooth Color Change
BLUE		ALL COLORS * 2 Second Smooth Color Change
ORANGE		ALL COLORS * 2 Second Smooth Color Change
PURPLE		ALL COLORS * 2 Second Smooth Color Change
CYAN		ALL COLORS * 2 Second Smooth Color Change
		OFF

WATT	LUMENS
5	200

Path Light: 3-Column 15" Height - Aluminum

Box Qty. **12**

Model	Voltage	Watts	CCT
LED-PL-3C-15-3W-5CCT-ALM-BZ-LV	12-24V AC/DC	3w	27/30/35/40/50k
LED-PL-3C-15-3W-5CCT-ALM-BL-LV	12-24V AC/DC	3w	27/30/35/40/50k



RGB+CW

WATT	LUMENS
3	150



IGL-FL-BR-ORB-12V



IGL-FL-BR-MBL-12V



IGL-RB-BR-ORB-12V



IGL-RB-BR-MBL-12V



IGL-HM-BR-ORB-12V



IGL-HM-BR-MBL-12V



IGL-3L-BR-ORB-12V



IGL-3L-BR-MBL-12V



-BZ



-BL



-ORB



-MBL



LED-IGLS-FL-9W-5CCT-ALM-BZ-LV



LED-IGLS-RB-9W-5CCT-ALM-BZ-LV



LED-IGLS-SH-9W-5CCT-ALM-BZ-LV

In-Ground Light - Solid Brass

Box Qty.
10

Model	Voltage	Finish	Bulb
IGL-FL-BR-ORB-12V	12V	Oil Rubbed Bronze	MR-16
IGL-FL-BR-MBL-12V	12V	Matte Black	MR-16
IGL-RB-BR-ORB-12V	12V	Oil Rubbed Bronze	MR-16
IGL-RB-BR-MBL-12V	12V	Matte Black	MR-16
IGL-HM-BR-ORB-12V	12V	Oil Rubbed Bronze	MR-16
IGL-HM-BR-MBL-12V	12V	Matte Black	MR-16
IGL-3L-BR-ORB-12V	12V	Oil Rubbed Bronze	MR-16
IGL-3L-BR-MBL-12V	12V	Matte Black	MR-16

In Ground Light - Flat Open Lens - Aluminum

Box Qty.
24

Model	Voltage	Watts	CCT
LED-IGL-FL-5W-RGB+5CCT-ALM-BZ-LV	12-24V AC/DC	5w	27/30/35/40/50k
LED-IGL-FL-5W-RGB+5CCT-ALM-BL-LV	12-24V AC/DC	5w	27/30/35/40/50k

17 SCENE OPTIONS

2700K		RED		RED/GREEN/BLUE		+ 2 Second Smooth Color Change
3000K		GREEN		RED/GREEN/BLUE		+ 2 Second Flash Color Change
3500K		BLUE		ALL COLORS		+ 2 Second Smooth Color Change
4000K		ORANGE		ALL COLORS		+ 2 Second Flash Color Change
5000K		PURPLE		ALL COLORS		+ 2 Second Smooth Color Change
WHITE		CYAN		ALL COLORS		+ 2 Second Flash Color Change
				OFF		

WATT	LUMENS
5	350



RGB+CW

Landscape Deck Light - Solid Brass

Box Qty.
40

Model	Voltage	Finish	Bulb
DL-BR-ORB-12V	12V	Oil Rubbed Bronze	G4
DL-BR-MBL-12V	12V	Matte Black	G4

Box Qty.
30

Model	Voltage	Watts	CCT
LED-IGLS-FL-9W-5CCT-ALM-BZ-LV	12-24V AC/DC	9w	50/40/35/30/27k
LED-IGLS-RB-9W-5CCT-ALM-BZ-LV	12-24V AC/DC	9w	27/30/35/40/50k
LED-IGLS-SH-9W-5CCT-ALM-BZ-LV	12-24V AC/DC	9w	27/30/35/40/50k

WATT	LUMENS
9	700





Hardscape Replaceable - 4\"/>

Box Qty. 40

Model	Voltage	Watts	CCT
LED-HS-4I-2W-RGB+5CCT-BR-ORB-LV	9-17V	2w	27/30/35/40/50k
LED-HS-7I-3W-RGB+5CCT-BR-ORB-LV	9-17V	3w	27/30/35/40/50k
LED-HS-12I-4W-RGB+5CCT-BR-ORB-LV	9-17V	4w	27/30/35/40/50k

17 SCENE OPTIONS

2700K	RED	RED/GREEN/BLUE + 2 Second Smooth Color Change
3000K	GREEN	RED/GREEN/BLUE + 2 Second Flash Color Change
3500K	BLUE	ALL COLORS + 2 Second Smooth Color Change
4000K	ORANGE	ALL COLORS + 2 Second Flash Color Change
5000K	PURPLE	ALL COLORS + 2 Second Smooth Color Change
WHITE	CYAN	ALL COLORS + 2 Second Flash Color Change
		OFF

4I-2W		7I-3W	
WATT	LUMENS	WATT	LUMENS
2	200	3	200

12I-4W	
WATT	LUMENS
4	200



Hardscape Replaceable - 7\"/>


Box Qty. 40


Model	Voltage	Watts	CCT
LED-HS-7I-5W-RGB+5CCT-ALM-BZ-LV	12-14V	7w	27/30/35/40/50k

17 SCENE OPTIONS

2700K	RED	RED/GREEN/BLUE + 2 Second Smooth Color Change
3000K	GREEN	RED/GREEN/BLUE + 2 Second Flash Color Change
3500K	BLUE	ALL COLORS + 2 Second Smooth Color Change
4000K	ORANGE	ALL COLORS + 2 Second Flash Color Change
5000K	PURPLE	ALL COLORS + 2 Second Smooth Color Change
WHITE	CYAN	ALL COLORS + 2 Second Flash Color Change
		OFF

WATT	LUMENS
7	250

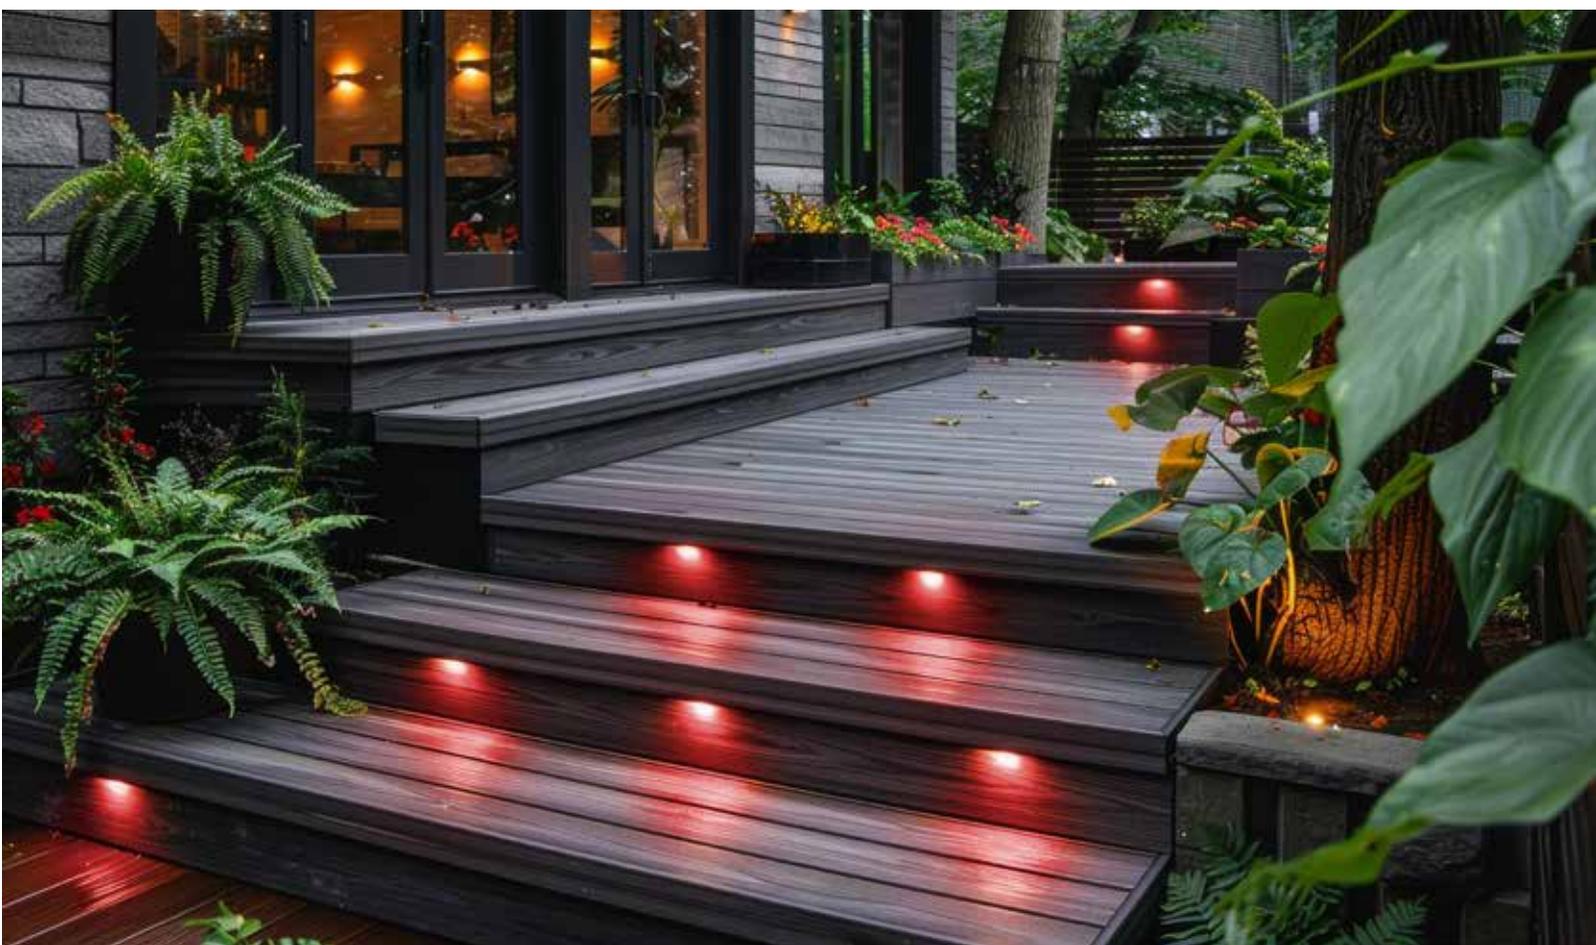

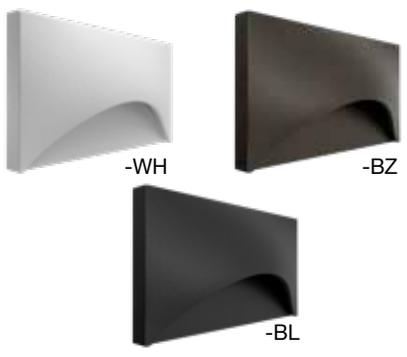


Landscape Step Light Horizontal - Semi-Circle - Aluminum

Box Qty. 48



Model	Voltage	Watts	CCT
LED-STEP-SC-3W-5CCT-HZ-ALM-WH-LV	12-24V	3w	27/30/35/40/50k
LED-STEP-SC-3W-5CCT-HZ-ALM-BZ-LV	12-24V	3w	27/30/35/40/50k
LED-STEP-SC-3W-5CCT-HZ-ALM-BL-LV	12-24V	3w	27/30/35/40/50k

WATT	LUMENS
3	100

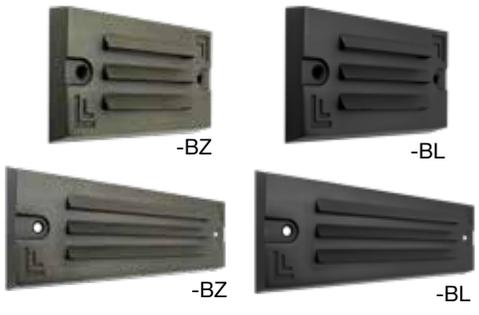

Surface Mount Step Light 5" / 9" Width - Louver - Solid Brass

Box Qty. 30



Model	Voltage	Watts	CCT
LED-STEP-LVR-SM-5-3W-5CCT-BR-ORB-LV	9-17V	3w	27/30/35/40/50k
LED-STEP-LVR-SM-5-3W-5CCT-BR-MBL-LV	9-17V	3w	27/30/35/40/50k
LED-STEP-LVR-SM-9-5W-5CCT-BR-ORB-LV	9-17V	5w	27/30/35/40/50k
LED-STEP-LVR-SM-9-5W-5CCT-BR-MBL-LV	9-17V	5w	27/30/35/40/50k

5-3W		9-5W	
WATT	LUMENS	WATT	LUMENS
3	60	5	100



Surface Mount Step Light 5" Width - Louver - Aluminum

Box Qty. 30



Model	Voltage	Watts	CCT
LED-STEP-LVR-SM-5-4W-5CCT-ALM-BZ-LV	12-24V	4w	27/30/35/40/50k
LED-STEP-LVR-SM-5-4W-5CCT-ALM-BL-LV	12-24V	4w	27/30/35/40/50k

WATT	LUMENS
4	60





Transformers

Box Qty. 1

Model	Voltage	Finish
WMT-LV-150W-SS	12, 13, 14, 15v	Stainless Steel
WMT-LV-300W-SS	12, 13, 14, 15v	Stainless Steel
WMT-LV-600W-SS	12, 13, 14, 15v	Stainless Steel



MT-LV-PG



DT-LV-PG

Timers

Box Qty. 100

Model	Voltage	Finish
MT-LV-PG	120	White
DT-LV-PG	120	White



Photocell

Box Qty. 10

Model	Voltage	Finish
PC-SVL-UNV-1/2"	120	Black



STK-HD

Brass Stake 10" Heavy Duty - Solid Brass

Box Qty. 20

Model	Finish
STK-HD-1/2-BR	Brass



BR-ORB



BR-MBL

Brass 1/2" Surface Mount - Solid Brass

Box Qty. 50

Model	Finish
SM-1/2-BR-ORB	Oil Rubbed Bronze
SM-1/2-BR-MBL	Matte Black



BR-ORB



BR-MBL

Brass Tree Mount - Solid Brass

Box Qty. 50

Model	Finish
SM3-1/2-BR-ORB	Oil Rubbed Bronze
SM3-1/2-BR-MBL	Matte Black



BR-ORB



BR-MBL

Brass Stake Cover - Solid Brass

Box Qty. 50

Model	Finish
STKC-1/2-BR-ORB	Oil Rubbed Bronze
STKC-1/2-BR-MBL	Matte Black



GM-1/2

Landscape Gutter Mount - Solid Brass

Box Qty. 100

Model	Finish
GM-1/2-BR-SS	Stainless Steel



-BZ



-BL

1/2" Surface Mount - Aluminum

Box Qty. 48

Model	Finish
SM-1/2-ALM-BZ	Bronze
SM-1/2-ALM-BL	Black



-BZ



-BL

Gutter Mount - Aluminum

Box Qty. 48

Model	Finish
GM-1/2-ALM-BZ	Bronze
GM-1/2-ALM-BL	Black



-BZ



-BL

Path Light Cover - Aluminum

Box Qty. 24

Model	Finish
PL-AT-1/2-ALM-BZ	Bronze
PL-AT-1/2-ALM-BL	Black

LED Step Lights

- 3 faceplates included in the box: horizontal angled louvre, vertical angled louvre, and flat frosted lens
- Non-dimmable

Box Qty. 24



Model	Voltage	Watts	CCT
LED-STEP-AGL-2W-27K-120V-WH	120V	2w	2700k
LED-STEP-AGL-2W-27K-120V-BLK	120V	2w	2700k
LED-STEP-AGL-2W-27K-120V-BZ	120V	2w	2700k
LED-STEP-AGL-2W-30K-120V-WH	120V	2w	3000k
LED-STEP-AGL-2W-30K-120V-BLK	120V	2w	3000k
LED-STEP-AGL-2W-30K-120V-BZ	120V	2w	3000k
LED-STEP-AGL-2W-40K-120V-WH	120V	2w	4000k
LED-STEP-AGL-2W-40K-120V-BLK	120V	2w	4000k
LED-STEP-AGL-2W-40K-120V-BZ	120V	2w	4000k

WATT	LUMENS
3	150



LED ARCY Step Lights - 5-CCT

- Vertical (VT) or Horizontal (HZ) versions available
- Rated for indoor and outdoor use (IP67)
- Non-dimmable

Box Qty. 18



Model	Voltage	Watts	CCT
LED-STEP-ARC-3W-5CCT-HZ-WH	120V	3w	27/30/35/40/50k
LED-STEP-ARC-3W-5CCT-VT-WH	120V	3w	27/30/35/40/50k
LED-STEP-ARC-3W-5CCT-HZ-BLK	120V	3w	27/30/35/40/50k
LED-STEP-ARC-3W-5CCT-VT-BLK	120V	3w	27/30/35/40/50k
LED-STEP-ARC-3W-5CCT-HZ-BN	120V	3w	27/30/35/40/50k
LED-STEP-ARC-3W-5CCT-VT-BN	120V	3w	27/30/35/40/50k





Emergency Exit Sign (Single/Double Sided)

Box Qty. 12

Model	Voltage	Watts	CCT
LED-EM-EXT-RG-WH	120-277V	3w	Red/Green Selectable
LED-EM-EXT-RG-BL	120-277V	3w	Red/Green Selectable



Emergency Exit Sign Combo (Single/Double Sided)

Box Qty. 10

Model	Voltage	Watts	CCT
LED-EM-EXT-G-WH-CMB	120-277V	3.5w	Green

WATT	LUMENS
3.5	140



Emergency Exit Sign Combo (Single/Double Sided)

Box Qty. 10

Model	Voltage	Watts	CCT
LED-EM-EXT-RG-WH-CMB	120-277V	3.5w	Red/Green selectable
LED-EM-EXT-RG-BL-CMB	120-277V	3.5w	Red/Green selectable

WATT	LUMENS
3.5	140



Emergency Exit Sign (Single/Double Sided)

Box Qty. 8

Model	Voltage	Watts	CCT
LED-EM-EXT-G-WH-CMB-RC	120-277V	3.5w	Green

WATT	LUMENS
3.5	140



Emergency Exit Sign (Single/Double Sided)

Box Qty. 8

Model	Voltage	Watts	CCT
LED-EM-EXT-RG-WH-CMB-RC	120-277V	3.5w	Red/Green Selectable

WATT	LUMENS
3.5	140



Single Remote Head

Box Qty. 20

Model	Voltage	Watts	CCT
LED-EM-RC-1	120-277V	1.5w	5000k
LED-EM-RC-2	120-277V	3w	5000k

RC-1		RC-2	
WATT	LUMENS	WATT	LUMENS
1.5	160	3	320



Edge-Lit Emergency Exit Sign Single or Double Sided - Red/Green Select

Box Qty. 12

Model	Voltage	Watts	CCT
LED-EM-EXT-EL-RG	120-277V	3w	Red/Green Selectable



Emergency LED Light

Box Qty. 12

Model	Voltage	Watts	CCT
LED-EM-DH	120-277V	3w	5000k
LED-EM-DH-HO	120-277V	6w	5000k

DH		DH-HO	
WATT	LUMENS	WATT	LUMENS
3	140	6	650



Emergency LED Light Compact

Box Qty. 12

Model	Voltage	Watts	CCT
LED-EM-DHC-WH	120-277V	3w	5000k
LED-EM-DHC-BL	120-277V	3w	5000k

Slim Wall Pack: EGG-Line - 3-CCT

- Backup time up to 90 min.
- EMB- Emergency Back-up
- Emergency mode- 690 lumens

Box Qty. 10

Model	Voltage	Watts	CCT
LED-WPE-15W-TRI-PC-BZ	120-277V	15w	30/40/50k
LED-WPE-15W-TRI-PC-BZ-EMB	120-277V	15w	30/40/50k
LED-WPE-15W-TRI-PC-BL	120-277V	15w	30/40/50k
LED-WPE-15W-TRI-PC-BL-EMB	120-277V	15w	30/40/50k

*Custom finishes include white, black, gray, and custom. 7 Day lead time required. Please contact us for pricing based on qty. for custom finish orders.

WATT	LUMENS
15	1,950





Corn Bulbs - 3-Color 3-Power Selectable - 3-CCT, 3-Power

Box Qty. 12
3M36- 12
3M54- 12
3M80- 6
3M120- 6



Model	Voltage	Watts	CCT
LED-CRN-3M36-TRI-E26	120-277V	18/27/36w	30/40/50k
LED-CRN-3M36-TRI-EX39	120-277V	18/27/36w	30/40/50k
LED-CRN-3M54-TRI-E26	120-277V	36/45/54w	30/40/50k
LED-CRN-3M54-TRI-EX39	120-277V	36/45/54w	30/40/50k
LED-CRN-3M80-TRI-EX39	120-277V	54/63/80w	30/40/50k
LED-CRN-3M120-TRI-EX39	120-277V	80/100/120w	30/40/50k

Accessory Model	Description
HB01DMS-A	Bi-level motion + daylight sensor
HB03R	Controller for HB01DMS-A (controls multiple)

WATT	LUMENS
18	2,610
27	3,915
36	5,220
45	6,525
54	7,830
63	9,135
80	11,600
100	14,500
120	17,400



Corn Bulbs: Directional - 3-CCT, 3-Power

Box Qty. 6



Model	Voltage	Watts	CCT
LED-CRNDL-3P54-TRI-EX39	120-277V	54/45/36w	30/40/50k
LED-CRNDL-3P110-TRI-EX39	120-277V	110/95/75w	30/40/50k

3P54		3P110	
WATT	LUMENS	WATT	LUMENS
36	4,320	75	9,000
45	5,400	95	11,400
54	6,480	110	13,200



Directional Retrofit Lamp - 5000K, 3-Power

Box Qty. 6



Model	Voltage	Watts	CCT
LED-FLL-3P54-50K-EX39	120-277V	54/45/36w	5000k
LED-FLL-3P115-50K-EX39	120-277V	115/95/75w	5000k

3P54		3P115	
WATT	LUMENS	WATT	LUMENS
36	4,140	75	8,625
45	5,175	95	10,926
54	6,210	115	13,225



High Bay Replacement Lamp - 3-CCT, 3-Power

Box Qty. 6



Model	Voltage	Watts	CCT
LED-RHBL-3P120-TRI-EX39	120-277V	120/100/80w	30/40/50k
LED-RHBL-3P160-TRI-EX39	120-277V	160/140/120w	30/40/50k

3P120		3P160	
WATT	LUMENS	WATT	LUMENS
80	12,800	120	19,200
100	16,000	140	22,400
120	19,200	160	25,600





MR-Series: SCAPE-Line - MR-8 Series

ETL Box Qty. 20

Model	Voltage	Watts	CCT
LED-MR8-2.5W-27K-38D-BL	9-17V	2.5w	2700k
LED-MR8-2.5W-30K-38D-BL	9-17V	2.5w	3000k

WATT	LUMENS
2.5	220



MR-Series: SCAPE-Line - MR-11 Series

ETL Box Qty. 20

Model	Voltage	Watts	CCT
LED-MR11-2.5W-27K-38D-BL	9-17V	2.5w	2700k
LED-MR11-2.5W-30K-38D-BL	9-17V	2.5w	3000k

WATT	LUMENS
2.5	220



MR-Series: Beam Angle Selectable - MR-16 Series


ETL Box Qty. 20

Model	Voltage	Watts	CCT
LED-MR16-4W-27K-3B-BL	9-17V	4w	2700k
LED-MR16-4W-30K-3B-BL	9-17V	4w	3000k
LED-MR16-7W-27K-3B-BL	9-17V	7w	2700k
LED-MR16-7W-30K-3B-BL	9-17V	7w	3000k

4W		7W	
WATT	LUMENS	WATT	LUMENS
4	350	7	600



20° / 40° / 60°
Adjustable
Beam Angle

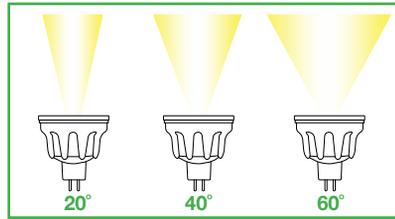

MR-Series: Beam Angle Adjustable + 5-CCT - MR-16 Series


ETL Box Qty. 20

Model	Voltage	Watts	CCT
LED-MR16-5W-5CCT-4B-BL	9-17V	5w	27/30/35/40/50k
LED-MR16-8W-5CCT-4B-BL	9-17V	8w	27/30/35/40/50k

5W		8W	
WATT	LUMENS	WATT	LUMENS
5	530	8	700



15° / 30° / 60°
Replaceable Lens
Included

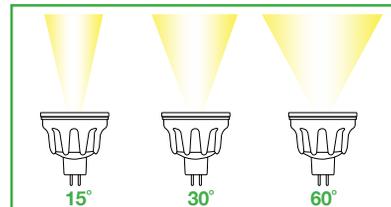



PL Lamp G24 Directional - Type A+B, 4-CCT

Box Qty. 100

NEW

Model	Voltage	Watts	CCT
LED-PL-G24-4P15-4CCT-DR	120-277V	15/12/10/8w	30/35/40/50k

4CCT

WATT	LUMENS
8	960
10	1,200
12	1,440
15	1,800



PL Lamp G24 Omni-Directional - G24 Series, 4-CCT

Box Qty. 100

NEW

Model	Voltage	Watts	CCT
LED-PL-G24-4P15-4CCT-OMNI	120-277V	15/12/10/8w	30/35/40/50k

4CCT

WATT	LUMENS
8	960
10	1,200
12	1,440
15	1,800



PL Lamp 2G11 Omni-Directional - Type A+B, 5-CCT

Box Qty. 25

NEW

Model	Voltage	Watts	CCT
LED-PL-2G11-16-16W-5CCT	120-277V	16w	30/35/40/50/65k
LED-PL-2G11-22-20W-5CCT	120-277V	20w	30/35/40/50/65k

5CCT

16W		20W	
WATT	LUMENS	WATT	LUMENS
16	2,000	20	3,000



PL Lamp GX23 Omni-Directional - Type A+B

Box Qty. 50

Model	Voltage	Watts	CCT
LED-PL-GX23-6W-40K	120-277V	6w	4000k
LED-PL-GX23-6W-50K	120-277V	6w	5000k

WATT	LUMENS
6	600



PL Lamp G24 Omni-Directional - Type A+B

Box Qty. 50

Model	Voltage	Watts	CCT
LED-PL-G24-7W-40K 13W Equivalent	120-277V	7w	4000k
LED-PL-G24-7W-50K 13W Equivalent	120-277V	7w	5000k
LED-PL-G24-11W-30K 13W Equivalent	120-277V	11w	3000k
LED-PL-G24-11W-40K 13W Equivalent	120-277V	11w	4000k
LED-PL-G24-11W-50K 13W Equivalent	120-277V	11w	5000k

G24-7W		G24-11W	
WATT	LUMENS	WATT	LUMENS
7	650	11	1,300



A19 Dimmable

Box Qty. 40

Model	Voltage	Watts	CCT
LED-FLM-A19-8.5W-30K-D	120V	8.5w	3000k
LED-FLM-A19-4W-30K-12V	12v	4w	3000k
LED-FLM-A19-10W-27K	120V	10w	2700k
LED-FLM-A19-HM-4W-18K	120V	4w	1800k

8.5W		4W		10W		HM-4W	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
8.5	550	4	550	10	1,000	4	400



Candelabra

Box Qty. 100

Model	Voltage	Watts	CCT
LED-FLM-E12T-4W-30K-12V	12v	4w	3000k
LED-FLM-E12T-4W-27K	120V	4w	2700k
LED-FLM-E12T-4W-30K	120V	4w	3000k
LED-FLM-E12T-4W-60K	120V	4w	6000k
LED-FLM-E12FL-4W-27K	120V	4w	2700k
LED-FLM-E12T-6W-27K	120V	6w	2700k
LED-FLM-E12T-6W-30K	120V	6w	3000k
LED-FLM-E12T-6W-40K	120V	6w	4000k

4W		6W	
WATT	LUMENS	WATT	LUMENS
4	400	6	600



ST64 Edison

Box Qty. 40

Model	Voltage	Watts	CCT
LED-FLM-ST64-4W-18K	120V	4w	1800k
LED-FLM-ST64-5W-30K	120V	5w	3000k

4W		5W	
WATT	LUMENS	WATT	LUMENS
4	400	5	400



Globes

Box Qty. 100

Model	Voltage	Watts	CCT
LED-FLM-G16.5C-4W-27K	120V	4w	2700k
LED-FLM-G16.5M-4W-27K	120V	4w	2700k
LED-FLM-G25-5W-27K	120V	5w	2700k

4W		5W	
WATT	LUMENS	WATT	LUMENS
4	400	5	400



Tubular

Box Qty. 40

Model	Voltage	Watts	CCT
LED-FLM-T30-4W-18K	120V	4w	1800K
LED-FLM-T30-5W-30K	120V	5w	3000K
LED-FLM-T30-5W-50K	120V	5w	5000K

WATT	LUMENS	WATT	LUMENS
4	400	5	400



LED Bulbs - A Series, 5-CCT

TITLE 20 DIMMABLE COMPLIANT TITLE 24 COMPLIANT JAB8 COMPLIANT IESNA E17 Box Qty. 100

Model	Voltage	Watts	CCT
LED-A19-9W-5CCT	120V	9w	27/30/35/40/50k
LED-A21-15W-5CCT	120V	15w	27/30/35/40/50k



Carton Qty.	A19	A21
Inner Carton	10	10
Master Carton	100	100

9W		15W	
WATT	LUMENS	WATT	LUMENS
9	800	15	1,600



GU24 Series, 5-CCT

TITLE 20 DIMMABLE COMPLIANT TITLE 24 COMPLIANT JAB8 COMPLIANT IESNA E17 Box Qty. 100

Model	Voltage	Watts	CCT
LED-A19GU24-9W-5CCT	120V	9w	27/30/35/40/50k



Carton Qty.	GU24	WATT	LUMENS
Inner Carton	10	9	800
Master Carton	100		



BR Series, 5-CCT

TITLE 20 DIMMABLE COMPLIANT TITLE 24 COMPLIANT JAB8 COMPLIANT IESNA E17 Box Qty. 100

Model	Voltage	Watts	CCT
LED-BR20-6W-5CCT	120V	6w	27/30/35/40/50k
LED-BR30-8.5W-5CCT	120V	8.5w	27/30/35/40/50k
LED-BR40-13W-5CCT	120V	13w	27/30/35/40/50k



Carton Qty.	BR20	BR30	BR40
Inner Carton	10	6	6
Master Carton	100	48	48

6W		8.5W		13W	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
6	450	8.5	650	13	1,050



PAR Series, 5-CCT

TITLE 20 DIMMABLE COMPLIANT TITLE 24 COMPLIANT JAB8 COMPLIANT IESNA E17 Box Qty. 100

Model	Voltage	Watts	CCT
LED-P20-7W-5CCT	120V	7w	27/30/35/40/50k
LED-P30-10W-5CCT	120V	10w	27/30/35/40/50k
LED-P38-13W-5CCT	120V	13w	27/30/35/40/50k



Carton Qty.	P20	P30	P38
Inner Carton	10	6	6
Master Carton	100	48	48

7W		10W		13W	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
7	450	10	750	13	1,000



GU10 Series, 5-CCT

TITLE 20 DIMMABLE COMPLIANT TITLE 24 COMPLIANT JAB8 COMPLIANT IESNA E17 Box Qty. 100

Model	Voltage	Watts	CCT
LED-GU10-6.5W-5CCT	120V	6.5w	27/30/35/40/50k



Carton Qty.	GU10	WATT	LUMENS
Inner Carton	10	6.5	500
Master Carton	100		



A19 6-Pack Screw-Base LED Non-Dimmable Bulb

Box Qty. 16

Model	Voltage	Watts	CCT
LED-A19-9W-30K-ND6	120V	9w	3000k

WATT	LUMENS
9	800



Final Production

A21 Screw-Base LED Bulb

Box Qty. 100

Model	Voltage	Watts	CCT
LED-A21-16W-30K-HD	120V	16w	3000k
LED-A21-16W-40K-HD	120V	16w	4000k
LED-A21-16W-50K-HD	120V	16w	5000k

WATT	LUMENS
16	1,600



PAR38 12K Jewelry Bulb

Box Qty. 10

Model	Voltage	Watts	CCT
LED-PAR38-32W-12K-UNV	120-277V	32w	12000k

WATT	LUMENS
32	3,000



Final Production

Candelabra Bulbs

- E12 'candelabra' base
- '-ND' models are non-dimmable
- '-D' models are dimmable

Box Qty. 100

Model	Voltage	Watts	CCT
LED-E12-3W-27K-ND	120V	3w	2700k
LED-E12-5W-30K-D	120V	5w	3000k

3W		5W	
WATT	LUMENS	WATT	LUMENS
3	280	5	280



MR Series Bulbs

Box Qty. MR11- 50 MR16- 100

Model	Voltage	Watts	CCT
LED-MR11-3W-30K-2PK	12V	3w	3000k
LED-MR11-3W-50K-2PK	12V	3w	5000k
LED-MR16-5W-27K-HD	12V	5w	2700k
LED-MR16-5W-30K-HD	12V	5w	3000k
LED-MR16-7W-27K-HD	12V	7w	2700k
LED-MR16-7W-30K-HD	12V	7w	3000k
LED-MR16-7W-40K-HD	12V	7w	4000k
LED-MR16-7W-50K-HD	12V	7w	5000k
LED-MR16-9W-D-DIM	12V	9w	6500k

3W		5W		7W		9W	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
3	280	5	350	7	500	9	500



G9 Bulbs

JA8 Box Qty. 100
TITLE 24 COMPLIANT LIST

Model	Voltage	Watts	CCT
LED-G9-5W-HL-30K	120V	5w	3000k
LED-G9-5W-HL-40K	120V	5w	4000k

WATT	LUMENS
5	500



G9 Bulbs

JA8 Box Qty. 100
TITLE 24 COMPLIANT LIST

Model	Voltage	Watts	CCT
LED-G9-4.5W-27K	120V	4.5w	2700k
LED-G9-4.5W-30K	120V	4.5w	3000k

WATT	LUMENS
4.5	450



Bayonet Base Bulbs - Silicone Waterproof

• Available in single and double contact (-SC & -DC)

JA8 Box Qty. 100
TITLE 24 COMPLIANT LIST

Model	Voltage	Watts	CCT
LED-BNWP-3W-WW-SC	12V	3w	3000k
LED-BNWP-3W-CW-SC	12V	3w	4000k
LED-BNWP-3W-WW-DC	12V	3w	3000k

WATT	LUMENS
3	280



Wedge-Base Bulbs - Silicone Waterproof

JA8 Box Qty. 100
TITLE 24 COMPLIANT LIST

Model	Voltage	Watts	CCT
LED-WGWP-3W-WW	12V AC/DC	3w	3000k

WATT	LUMENS
3	280



Bi-Pin 12V Bulbs - Silicone Waterproof

Box Qty. 100

Model	Voltage	Watts	CCT
LED-G4WP-1.5W-SW	12V AC/DC	1.5w	2700k
LED-G4WP-1.5W-WW	12V AC/DC	1.5w	3000k
LED-G4WP-1.5W-CW	12V AC/DC	1.5w	4000k
LED-G4WP-2.5W-SW	12V AC/DC	2.5w	2700k
LED-G4WP-2.5W-WW	12V AC/DC	2.5w	3000k
LED-G4WP-2.5W-CW	12V AC/DC	2.5w	4000k
LED-G4WP-3.5W-SW	12V AC/DC	3.5w	2700k
LED-G4WP-3.5W-WW	12V AC/DC	3.5w	3000k
LED-G4WP-3.5W-CW	12V AC/DC	3.5w	4000k
LED-GY6.35-4W-27K	12V AC/DC	4w	2700k
LED-GY6.35-4W-30K	12V AC/DC	4w	3000k

1.5W		2.5W		3.5W		4W	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
1.5	110	2.5	210	3.5	280	4	350



PAR LUX Series Bulb (40°)

Box Qty. 20

Model	Voltage	Watts	CCT
LED-PAR36-13W-W	12V	13w	3000k

WATT	LUMENS
13	1,600



120V Architectural Striplights

- Lumen & watt ratings are per-foot
- Compatible with most dimmer modules
- Cuttable every 18"
- Available in 100ft rolls

Box Qty. 2

Model	Voltage	Watts	Lumens	CCT
ST-2835-120V-4W-30K	120V	4w/ft	320/ft	3000k
ST-2835-120V-4W-40K	120V	4w/ft	320/ft	4000k
ST-2835-120V-4W-50K	120V	4w/ft	320/ft	5000k



ST-POWSET-18
ST-POWSET-36
ST-POWSET-72



ST-JBX-POW-1200-36"
ST-POW-UNV-400W-36"



ST-JUMPER-6
ST-JUMPER-12



ST-120-WP-COUP

120V Architectural Striplight Accessories

Box Qty. 100

Model	Voltage	Watts	Lumens	Color
ST-POWSET-18	120V	N/A	N/A	White
ST-POWSET-36	120V	N/A	N/A	White
ST-POWSET-72	120V	N/A	N/A	White
ST-JBX-POW-1200W-36"	120V	N/A	N/A	White
ST-POW-UNV-400W-36"	120V	N/A	N/A	White
ST-JUMPER-6	120V	N/A	N/A	White
ST-JUMPER-12	120V	N/A	N/A	White
ST-120-WP-COUP	120V	N/A	N/A	Clear
120V-STRAP-100PK	120V	N/A	N/A	N/A
ST-COUP-PIN-25PK	120V	N/A	N/A	N/A
ST-END-CAP-20PK	120V	N/A	N/A	N/A



120V-STRAP-100PK



ST-COUP-PIN



ST-END-CAP



Final Production

Low Voltage Striplights (12V)

Box Qty. 20

Model	Voltage	Watts	Lumens	CCT
LED-TP-3528-12V-DL	12V DC	1.5w/ft	120/ft	5000k
LED-TP-3528-12V-R	12V DC	1.5w/ft	120/ft	Red
LED-TP-3528-12V-B	12V DC	1.5w/ft	120/ft	Blue
LED-TP-3528-12V-G	12V DC	1.5w/ft	120/ft	Green
LED-TP-2835-12V-DL	12V DC	2.2w/ft	180/ft	5000k
LED-TP-5050-12V-DL	12V DC	4w/ft	285/ft	5000k



Final Production

Low Voltage Striplights (24V)

Box Qty. 20

Model	Voltage	Watts	Lumens	CCT
LED-TP-2216-2W-24V95-WW	24V DC	2w/ft	150/ft	3000k
LED-TP-2216-2W-24V95-DL	24V DC	2w/ft	150/ft	5000k
LED-TP-2216-3W-24V95-DL	24V DC	3w/ft	225/ft	5000k
LED-TP-2216-4W-24V95-DL	24V DC	4w/ft	300/ft	5000k

Box Qty. 20W-12
12V 60-12
12V 150-6
24V 60-6



Constant Voltage Triac Dimmable Transformers

Model	Voltage	Watts
CV-12V-DC-20W-DIM	Input: 120-277V Output: 12V DC	20w
CV-12V-DC-60W-DIM	Input: 120-277V Output: 12V DC	60w
CV-12V-DC-150W-DIM	Input: 120-277V Output: 12V DC	150w
CV-24V-DC-60W-DIM	Input: 120-277V Output: 24V DC	60w



Waterproof Junction Box Coupling

Box Qty.
100


Model	Description
JBX-WP-3P	Waterproof J-box coupling: 3-wire
JBX-WP-4P	Waterproof J-box coupling: 4-wire
JBX-WP-5P	Waterproof J-box coupling: 5-wire
JBX-WP-6P	Waterproof J-box coupling: 6-wire



Flex Whips: Snap On Connect + I-Shape Connector

Box Qty.
100

Model	Description
FLX-WHIP-6'-5	6 Feet Long 5 Wire Flex Whip Black/white/green/purple/gray
FLX-WHIP-6'-6	6 Feet Long 6 Wire Flex Whip Black/white/green/purple/gray/red

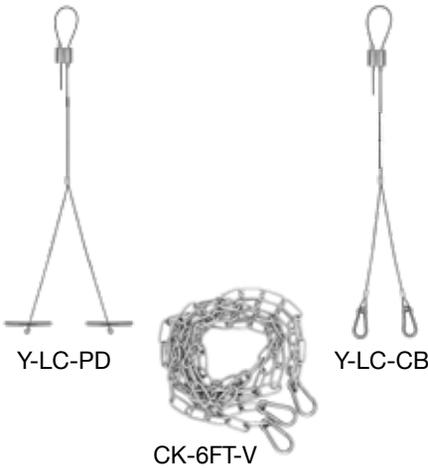

Suspension Kits & Chain Kits

Model	Description
SK-10FT-Y-LC-PD	Suspension kit: 10' Y-shape, loop top, paddle bottom (adjustable length)
SK-20FT-Y-LC-PD	Suspension kit: 20' Y-shape, loop top, paddle bottom (adjustable length)
SK-10FT-Y-LC-CB	Suspension kit: 10' Y-shape, loop top, carabiner bottom (adjustable length)
SK-20FT-Y-LC-CB	Suspension kit: 20' Y-shape, loop top, carabiner bottom (adjustable length)
LED-PNL-2X4-SK	Suspension kit: Panels, troffers
SK-9FT-ADJ-2	Suspension Kit: 9ft for linear fixtures: Wraps, Strips and Vapors
CK-6FT-V	6ft Chain hanging kit



Step Down Transformer

Box Qty.
10

Model	Input	Watt
STD-480-277-465A-FLX	120-277V	<1W



Surge Protectors

Box Qty.
10

Model	Input	Watt
SG-20KV-UNV	120-277V	<1W
SG-20KV-HV	277-480V	<1W



Button Photocell Universal

Box Qty.
10

Model	Input	Watt
PC-BTN-UNV-1/2"	120-277V	25-48v DC
PC-BTN-UNV-3/8"	120-277V	25-48v DC
PC-SVL-UNV-1/2"	120-277V	25-48v DC
PC-TWL-RC	120-277V	25-48v DC
PC-TWL-UNV	120-277V	25-48v DC
PC-TWL-HV	120-277V	25-48v DC

S-TWC-MW-1
TWC-DLS-TWC-PIR-1
S-TWC-PIR-ON/OFF

S-LINE-R



S-BMS-EXT-1



S-BMS-INT-1

S-TWC-PIR-BT
S-AUD-PIR-BT
S-SN-PIR-BT

S-TWC-PIR-SL



S-AUD-PIR-SL



S-SN-PIR-SL



S-CM-PIR-LV-SL



S-WM-PIR-CUNV-SL



S-WS-120V-USB



SGW-102

S-Line Sensors

Box Qty.
1

Model	Description	Output Voltage	Watts
S-TWC-MW-1	Twist-C microwave sensor Brightness: 100%/ hold time: 10 min. Bi-level dim: 50% stand by time: 10 min. Sensitivity: 100% daylight: enabled	12V	<1W
S-TWC-PIR-1	Twist-C microwave sensor Brightness: 100%/ hold time: 10 min. Bi-level dim: 50% stand by time: 10 min. Sensitivity: 100% daylight: enabled	12V	<1W
S-TWC-PIR-ON/OFF	PIR On/Off Only: Twist-C 3-Pin	12V	<1W
S-AUD-PIR-1	PIR Bi-Level + Daylight: Audio Jack	12V	<1W
S-SN-PIR-1	PIR Bi-Level + Daylight: Snap-In	12V	<1W
S-BMS-INT-1	Internal Microwave Bi-Level + Daylight	12V	<1W
S-BMS-EXT-1	External Microwave Bi-Level + Daylight	12V	<1W
S-LINE-R	Remote for S-LINE Series Sensors	12V	<1W
TWC-DL	Twist-C daylight sensor: Dusk to dawn, works like a photocell	12V	<1W

S-Line Sensors - Bluetooth NLC Listed - EnvisionLS App

Model	Description	Output Voltage	Watts
S-TWC-PIR-BT	PIR Bi-Level + Daylight: Twist-C Bluetooth EnVisionLS App	12V	<1W
S-AUD-PIR-BT	PIR Bi-Level + Daylight: Audio Jack Bluetooth EnVisionLS App	12V	<1W
S-SN-PIR-BT	PIR Bi-Level + Daylight: Snap-In ENVISIONLS	12V	<1W
S-CM-PIR-LV-BT	PIR Bi-Level + Daylight: Ceiling Sensor ENVISIONLS	12-24V	<1W
S-WM-PIR-CUNV-BT	PIR Bi-Level + Daylight: Wall Sensor ENVISIONLS	120-277V	<1W



S-Line Sensors - Bluetooth NLC Listed - SilvaIR

Model	Description	Output Voltage	Watts
S-TWC-PIR-SL	PIR Bi-Level + Daylight: Twist-C SILVAIR	12V	<1W
S-AUD-PIR-SL	PIR Bi-Level + Daylight: Audio Jack SILVAIR	12V	<1W
S-SN-PIR-SL	PIR Bi-Level + Daylight: Snap-In SILVAIR	12V	<1W
S-CM-PIR-LV-SL	PIR Bi-Level + Daylight: Ceiling Sensor SILVAIR	12-24V	<1W
S-WM-PIR-CUNV-SL	PIR Bi-Level + Daylight: Wall Sensor SILVAIR	120-277V	<1W
S-WS-120V-USB-SL	PIR Bi-Level + Daylight: Wall Outlet 3-Prong + USB SILVAIR	120V	<1W
S-WS-DIM-UNV-BT	EnVisionLS Wall Switch + Dimmer	120-277V	<1W
SGW-102	Gateway: Scheduling, Energy Monitoring, Remote Monitoring, System Diagnostics	120V	<1W



NEW



S-TWC-90

Sensor Accessories

Box Qty. 1

Model	Item Description	Voltage	Watts
S-TWC-90	S-Line 90DG Receptacle Extender	12V	<1w
S-TWC-J-90	S-Line: 3-pin Jumper Extender	12V	<1w



S-PP-BT



S-LINE-DIM-BT

S-Line Sensors - Bluetooth NLC Listed EnVision SMART App

Box Qty. 1

Model	Item Description	Voltage	Watts
S-PP-BT	S-Line: Dimmable power pack. Dim any 0-10V fixture.	12V	<1w
S-LINE-DIM-BT	Dimmer for S-LINE Series Bluetooth Sensors	12V	<1w
NEW S-TUN-0-10V-BT	EnVisionLS Tunable CCT Device for 0-10 Fixtures	12V	<1w
NEW S-WS-DIM-TUN-UNV-BT	EnVisionLS Wall Switch + Dimmer + Tunable CCT	120-277V	<1w



HB01DMS-A



HB03R

HB-Line Sensors

Box Qty. 1

Model	Item Description	Voltage	Watts
HB01DMS-A	Bi Level Motion Sensor w/ Daylight Harvesting, Works with ARL2, RHB, LHB, CRN Twist-C Technology (Remote Required: S-LINE-R)	12V	<1w
HB03R	Remote for HB-Line Series	12V	<1w



HD406VRH-D-WH



HD407V-CR



HD016VCR-8

H-Line Sensors

Box Qty. 1

Model	Item Description	Voltage	Watts
HD406VRH-D-WH	Bi level motion sensor w/ daylight harvesting white finish with side 1/2" knock out -remote control compatible	120-277V	<1w
HD407V-CR	Bi level motion sensor w/ daylight harvesting detachable version w/ external sensor -remote control compatible	120-277V	<1w
HD016VCR-8	Bi level motion sensor w/ daylight harvesting internal version w/ antenna -remote control compatible	120-277V	<1w
HD03R	Remote for H-line sensors	120-277V	<1w
HD05R	Remote for H-line sensors w/ screen	120-277V	<1w



HD03R



HD05R


Smart Sensors

Box Qty. 1



SMART-MOD

Model	Item Description	Voltage	Watts
SMART-MOD-BT	Smart bluetooth module - dim, group, controls, via bluetooth (connect to any 0-10V dim fixture)	120-277V	<1w
SMART-MOD-WF	Smart wifi module - dim, group, controls, via wifi (connect to any triac dimmable fixture)	120-277V	<1w
SMART-MOD-BT-GTW	Gateway: Add time control, smart home capability	120-277V	<1w

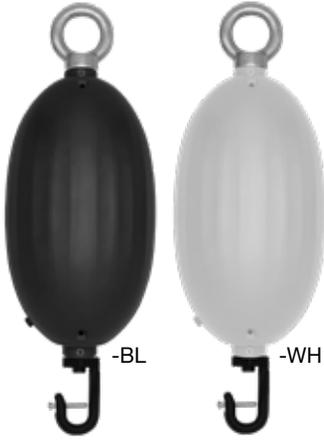

Battery Backup (30W High Voltage)

- Universal input voltage (100-347v AC, 50/60Hz)
- Constant output power (auto-sensing output)
- UL Listed for field installation
- Battery protection: over/under voltage, over-temp., short circuit
- Backup runtime: 90 minutes
- For use with internal driver - includes round UFO highbay EM kit



Model	Input	Watt	Output
LED-EMB-30W-HV-UFO-BL	120/347V	30W	175V DC
LED-EMB-30W-HV-UFO-WH	120/347V	30W	175V DC
UFO-TEST-CTR	N/A	N/A	N/A



Battery Backup (15W Low Voltage Double Flex)

- For use with external driver fixtures including: flat panels, troffers, high bays, wraps, etc.



Model	Input	Watt	Output
LED-EMB-15W-LV	120-277V	15W	25-48V DC



Battery Backup (23W Low Voltage Single Flex)

- For use with external driver fixtures including: flat panels, troffers, high bays, wraps, etc.



Model	Input	Watt	Output
LED-EMB-23W-HV-T8	120-277V	23W	120V DC



Battery Backup (15W Low Voltage Single Flex)

- For use with external driver fixtures including: flat panels, troffers, high bays, wraps, etc.



Model	Input	Watt	Output
LED-EMB-15W-LV-S	120-277V	15W	25-48V DC



Battery Backup (30W High Voltage Single Flex)

- For use with external driver fixtures including: flat panels, troffers, high bays, wraps, etc.



Model	Input	Watt	Output
LED-EMB-30W-HV-480-0/10V	277/480V	30W	400V DC



Battery Backup (Split Design)

- Universal input voltage (100-277v AC, 50/60Hz)
- Constant output power (auto-sensing output)
- UL Listed for field installation
- Battery protection: over/under voltage, over-temp., short circuit
- Backup runtime: 90 minutes
- For use with external driver w/ internal housing space: wall packs, canopy, etc.

 Box Qty. 4

Model	Input	Watt	Output
LED-EMB-8W-HV-0/10V	120-277V	8W	120-277V
LED-EMB-8W-HV-0/10V-2P	120-277V	8W	120-277V
LED-EMB-15W-HV-0/10V-2P	120-277V	15W	120-277V
LED-EMB-16W-HV-0/10V	120-277V	16W	120-277V
LED-EMB-25W-HV-0/10V-2P	120-277V	25W	120-277V
LED-EMB-32W-HV-0/10V	120-277V	32W	120-277V
LED-EMB-40W-HV-0/10V	120-277V	40W	120-277V
LED-EMB-25W-HV-2P	120-277V	25W	120-277V
LED-EMB-23W-HV-T8	120-277V	23W	120-277V
LED-EMB-30W-HV-480-0/10V	277-480V	30W	277-480V



LED-EMB-4W
LED-EMB-8W
LED-EMB-20W

Battery Backup (Split Design)

- Universal input voltage (100-277v AC, 50/60Hz)
- Constant output power (auto-sensing output)
- UL Listed for field installation
- Battery protection: over/under voltage, over-temp., short circuit
- Backup runtime: 90 minutes
- CW: Cold weather EMB

 Box Qty. 4

Model	Input	Watt	Output
LED-EMB-4W-LV-INT	120-277V	4W	35-56V DC
LED-EMB-5W-LV-RD-INT	120-277V	5W	25-90V DC
LED-EMB-8W-LV-INT	120-277V	8W	36-56V DC
LED-EMB-8W-LV-INT-150	120-277V	8W	60-150V DC
NEW LED-EMB-8W-LV-INT-30-300	120-277V	8W	36-56V DC
LED-EMB-8W-LV-INT-CW	120-277V	8W	36-56V DC
LED-EMB-8W-LV-INT-150-CW	120-277V	8W	60-150V DC
LED-EMB-20W-LV-INT	120-277V	20W	60-150V DC



LED-EMB-8W-CW

Displays



Retrofit Display
DISPLAY-RDL

Optional Trims for RDL-4 & RDL 5/6



Back




Undercabinet Display
DISPLAY-UC



Canless Downlight Display
DISPLAY-DLJBX

Notes

EnVisionLED.

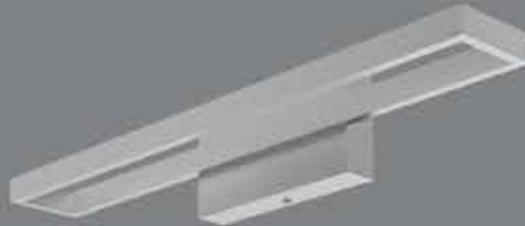

EnVisionSCAPE



CATALOG 2026 V1

EnVision LED Lighting, Inc.

Phone: 323.604.0066

www.envisionledlighting.com



SCAN FOR PDF VERSION