

Gemini™

Technical Information Pack



Vortex™
Spas

Gemini™



JETS

9



VOLUME

450 litres



SEATING

2 seats



DIMENSIONS

2.10 x 1.10 x 0.74m



FEATURES

Build

- Superior USA made Aristech™ acrylic
- Thermobond™ 4 layer shell construction
- 9 shell/cabinet colour combinations
- Duraflex™ 'no kink' PVC plumbing
- ThermoLock™ high-density locking cover
- Thermoclad™ maintenance-free cabinet

Water care

- Purezone™ CD Ozone water clarifier

Lighting

- Hydroglow™ LED floodlight

Control

- SpaNet™ premium control systems
- Spa Health Indicator

Hydrotherapy

- Individual seat pressure controls

Upgrades included in Avanté pack

- PermaFrame™ timber-free construction
- Purezone™ UV-C Sanitiser
- Hydroflow™ stainless steel bearing-less jets
- Hydroglow™ LED backlight water cascade
- Hydroglow™ jet & topside control lighting
- Hydroglow™ illuminated drink holders
- Hydroglow™ perimeter & cabinet lighting
- Hydroglow™ programmable lighting
- Hydroglow™ backlit drink holders

Optional extras

- SmartLINK™ Wifi connectivity
- SmartSTREAM™ sound system
- SpaNet™ Hybrid heat pump

WARRANTIES


Frame	Lifetime
Shell structure	10 yrs
Acrylic surface	5 yrs
Jets, plumbing & heater	5 yrs
Pumps & equipment	2 yrs

* Conditions apply. Specifications may change without notice. Pictures may show options not available on all models.

Gemini™

Jet specifications

Dimensions: 2.10 x 1.10 x 0.74m

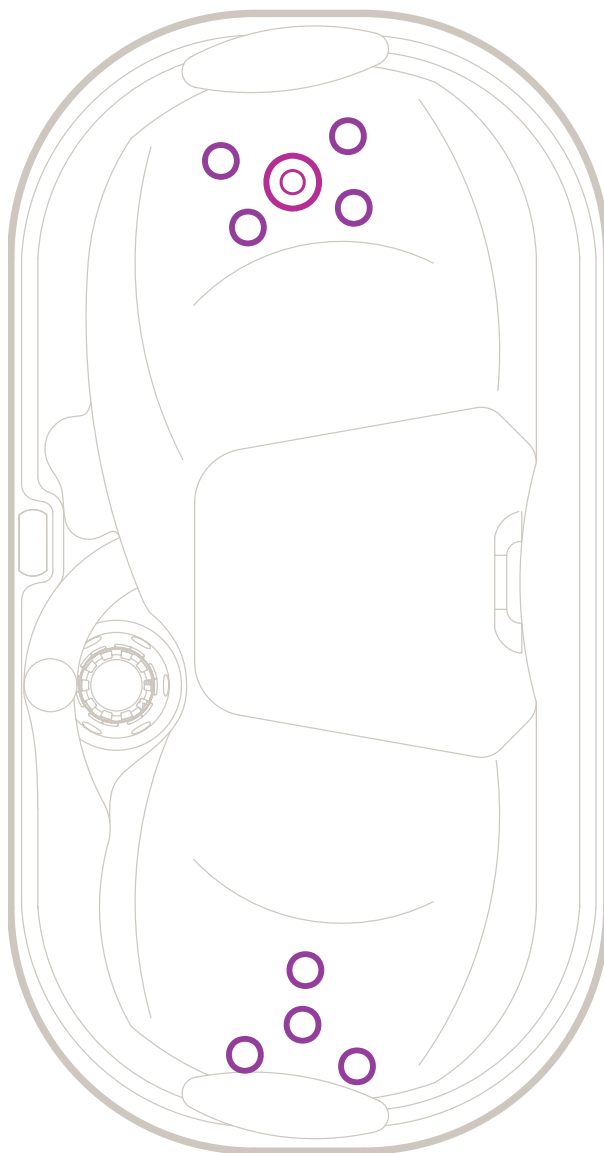

 127mm Directional Jets

 75mm Directional Jets

* Conditions apply. Specifications may change without notice. Pictures may show options not available on all models.

Gemini™

Specifications table

Dry weight	200kg
Filled weight (incl cover)	660kg
Lift weight	286.8kg
Intuitive spa controller	SVM1
Two speed pumps	1
Variable speed air blower	1
Variable output heater	1.5kW max
Recommended electrical supply	10 amps*

* Check with electrician about dedicated circuit requirements

* Conditions apply. Specifications may change without notice. Pictures may show options not available on all models.

Gemini™

Equipment location

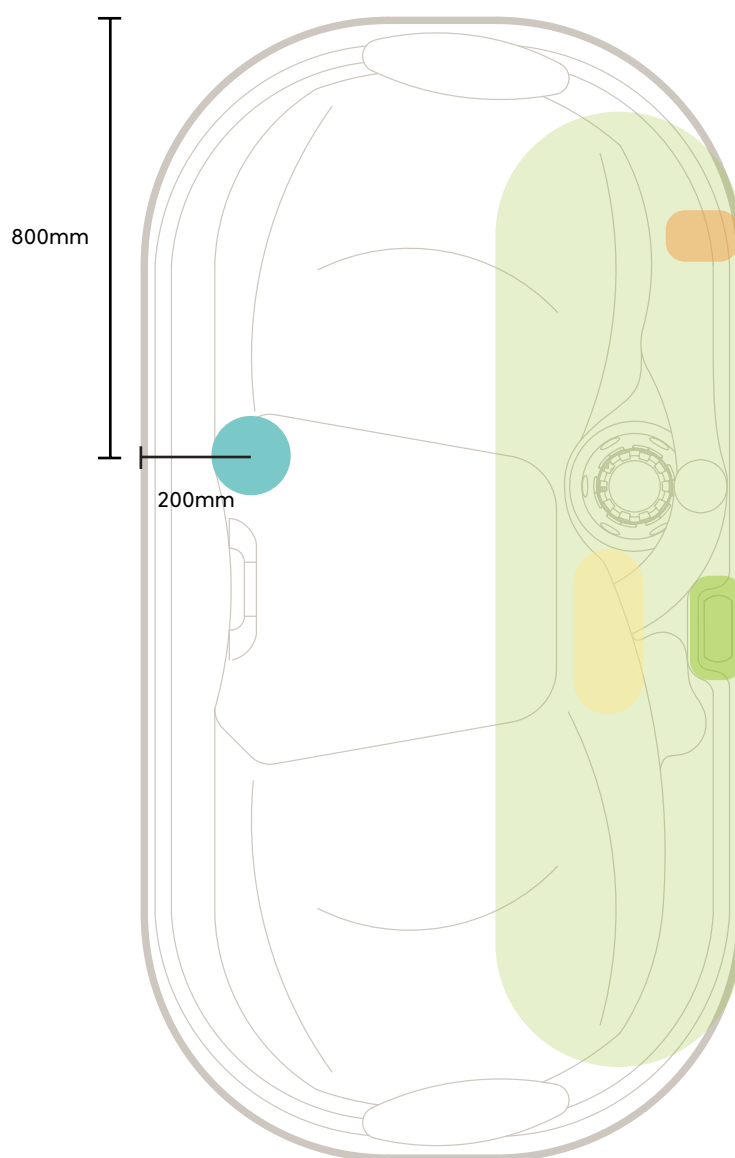


Illustration shows Gemini™ spa pool model


	Equipment Bay		Drain Valve
	Keypad		Circulation Pump
	Conduit Access		


* Conduit access should be no more than 100mm high above the concrete slab.

Note: This model has a rigid base, and if you choose to bring the piping conduit in from the bottom through the base, you will need to cut a hole into the base on-site before installation. The factory does not provide this hole. Please see the diagram above to find the location where you can drill the hole.

Gemini™

Standard Spa Cover

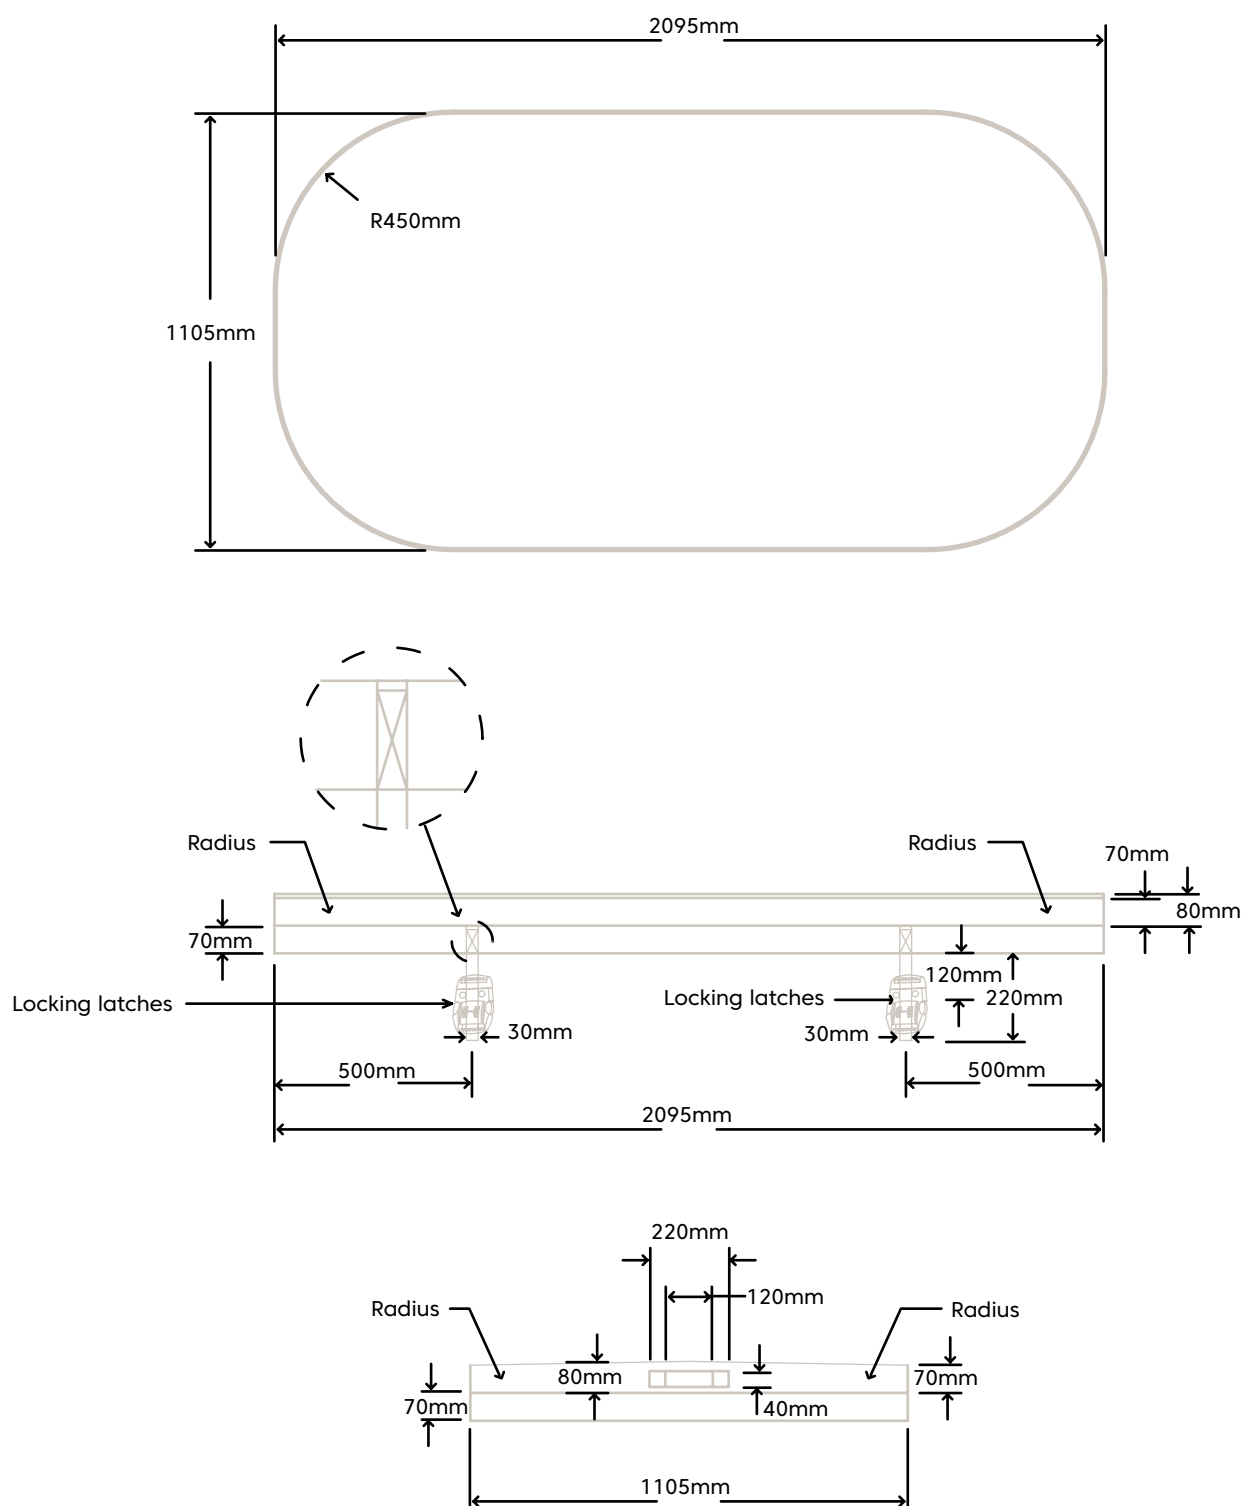

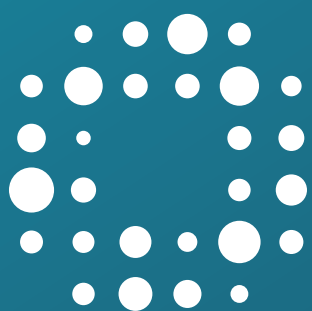

VortexTM
Spas