

Xenon™

Technical Information Pack



Xenon™



JETS

42



VOLUME

1212 litres



SEATING

5 seats



DIMENSIONS

2.30 x 2.30 x 0.92m



FEATURES

Build

- Superior USA made Aristech™ acrylic
- Thermobond™ 4 layer shell construction
- 9 shell/cabinet colour combinations
- Duraflex™ 'no kink' PVC plumbing
- Aromatherapy
- Thermoclad™ maintenance-free cabinet
- Beverage Cooler

Water care

- Purezone™ micro filtration
- Purezone™ CD Ozone water clarifier

Lighting

- Hydroglow™ underwater LED floodlight

Control

- SpaNet™ premium control systems
- Spa Health Indicator

Hydrotherapy

- Twin Hydrotherapy loungers
- Individual seat pressure controls

Upgrades included in Avanté pack

- Purezone™ UV-C sanitiser
- PermaFrame™ timber-free construction
- ThermoLock™ Dual layer insulation
- Hydroflow™ stainless steel bearing-less jets
- Hydroglow™ LED backlit water cascade
- Hydroglow™ jet & topside control lighting
- Hydroglow™ programmable lighting
- Hydroglow™ perimeter & cabinet lighting
- Hydroglow™ backlit drink holders
- Hydroglow™ backlit laminar jets

Optional extras

- SmartLINK™ Wifi connectivity
- SmartSTREAM™ sound system
- SpaNet™ Hybrid heat pump
- Neck therapy collar


WARRANTIES

Frame	Lifetime
Shell structure.....	10 yrs
Acrylic surface	5 yrs
Jets, plumbing & heater	5 yrs
Pumps & equipment	2 yrs

* Conditions apply. Specifications may change without notice. Pictures may show options not available on all models.

Jet specifications

Dimensions: 2.30 x 2.30 x 0.92m

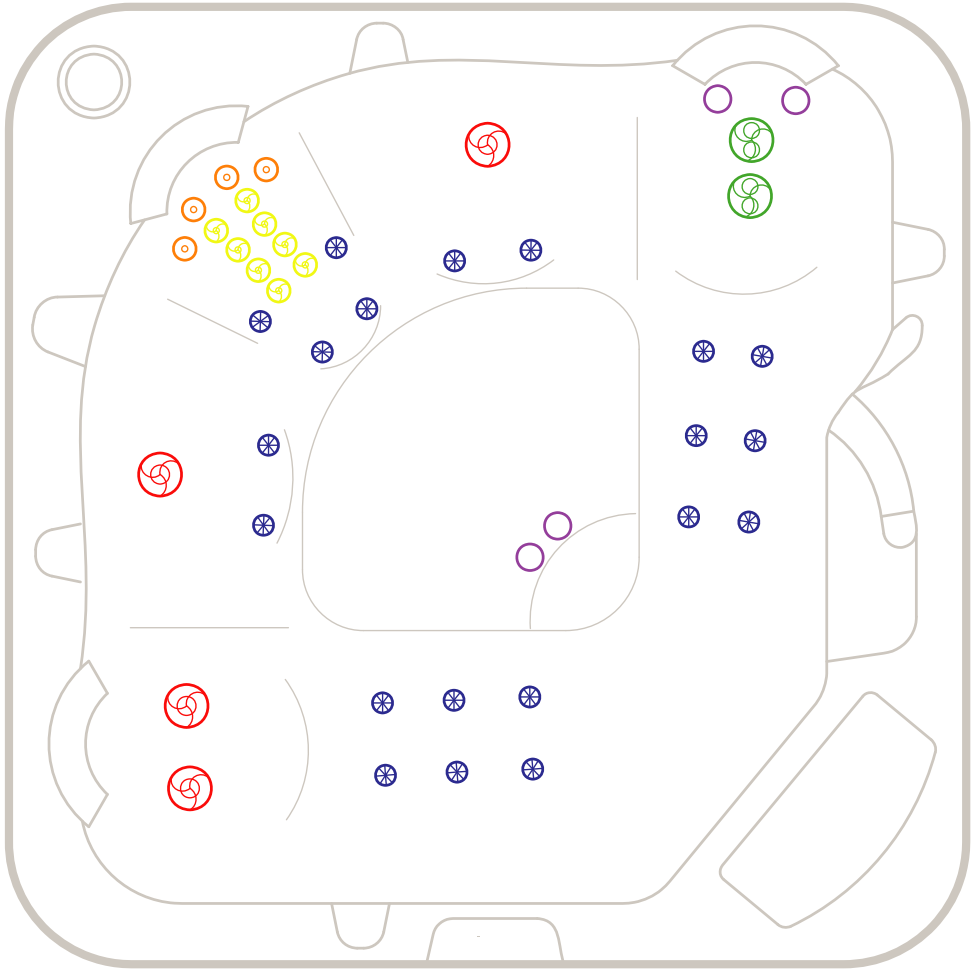

 127mm Single Spinning Jets

 130mm Hi Volcano Directional Jet

 75mm Single Spinning Jets

 50mm Twin Spinner Jets

 40mm Air Jets

 50mm Directional Jets

* Conditions apply. Specifications may change without notice. Pictures may show options not available on all models.

Xenon™

Specifications table

Dry weight	335kg
Filled weight (incl cover)	1564.7kg
Lift weight	431.4kg
Intuitive spa controller	SV2
Programmable circulation pump	1
Jet pumps	1
Variable speed air blower	1
Variable output heater	3kW max
Recommended electrical supply	15 amps

* Conditions apply. Specifications may change without notice. Pictures may show options not available on all models.

Xenon™

Equipment location

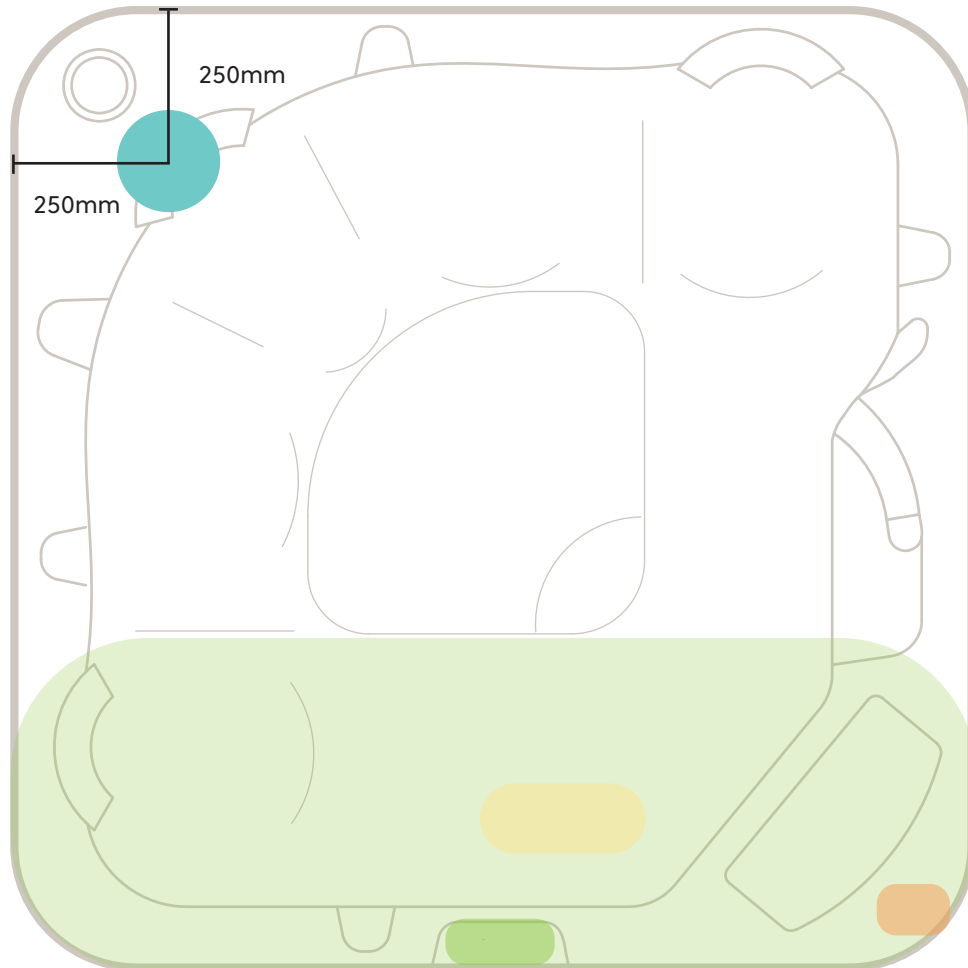


Illustration shows Xenon™ spa pool model


	Equipment Bay		Drain Valve
	Keypad		Circulation Pump
	Conduit Access		


* Conduit access should be no more than 100mm high above the concrete slab.

Note: This model has a rigid base, and if you choose to bring the piping conduit in from the bottom through the base, you will need to cut a hole into the base on-site before installation. The factory does not provide this hole. Please see the diagram above to find the location where you can drill the hole.

Xenon™

Standard Spa Cover

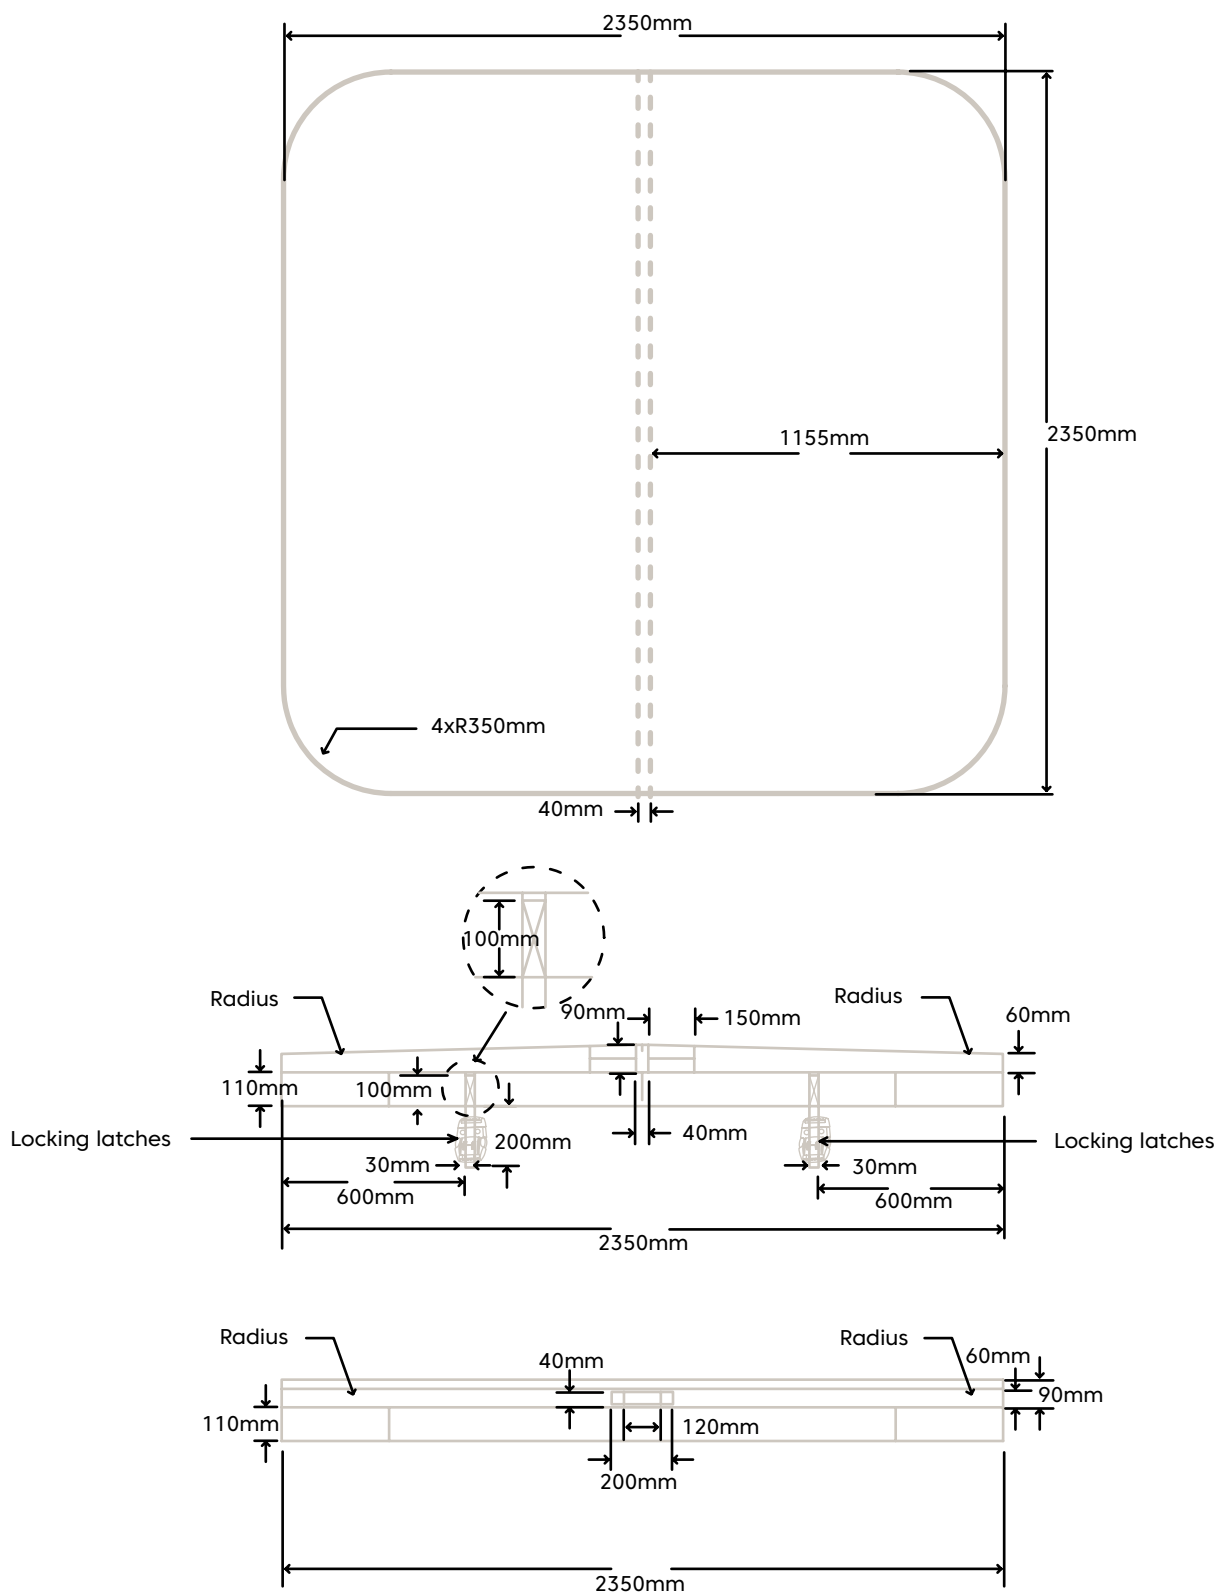



VortexTM
Spas