

Nitro™

— Technical Information Pack



Nitro™



JETS

Up to 71



VOLUME

1,379 litres



SEATING

5 seats



DIMENSIONS

2.30 x 2.30 x 0.92m



FEATURES

Build

- Superior USA made Aristech™ acrylic
- Thermobond™ 4 layer shell construction
- 9 shell/cabinet colour combinations
- Duraflex™ 'no kink' PVC plumbing
- Thermoclad™ maintenance-free cabinet
- Beverage cooler
- Aromatherapy

Water care

- Spa health indicator
- Purezone™ micro filtration
- Purezone™ CD Ozone water clarifier

Lighting

- Hydroglow™ underwater LED floodlight

Control

- SpaNet™ premium control systems
- Spa Health Indicator

Hydrotherapy

- Neck therapy collar
- Twin Hydrotherapy lounger
- Individual seat pressure controls
- Volcano jet

Optional Upgrades Included in Avanté

- PermaFrame™ timber-free construction
- Purezone™ UV sterilising system
- ThermoLock™ Dual layer insulation
- Hydroflow™ stainless steel bearing-less jets
- Hydroglow™ LED backlit water cascade
- Hydroglow™ programmable lighting
- Hydroglow™ jet & topside control lighting
- Hydroglow™ perimeter & cabinet lighting
- Hydroglow™ backlit drink holders
- Hydroglow™ backlit laminar jets

Optional Extras

- SmartLINK™ Wifi connectivity
- SmartSTREAM™ sound system
- SpaNet™ Hybrid heat pump

WARRANTIES


Frame	Lifetime
Shell structure	10 yrs
Acrylic surface	5 yrs
Jets, plumbing & heater	5 yrs
Pumps & equipment	2 yrs

* Conditions apply. Specifications may change without notice. Pictures may show options not available on all models.

Nitro™

Jet specifications


Dimensions: 2.30 x 2.30 x 0.92m

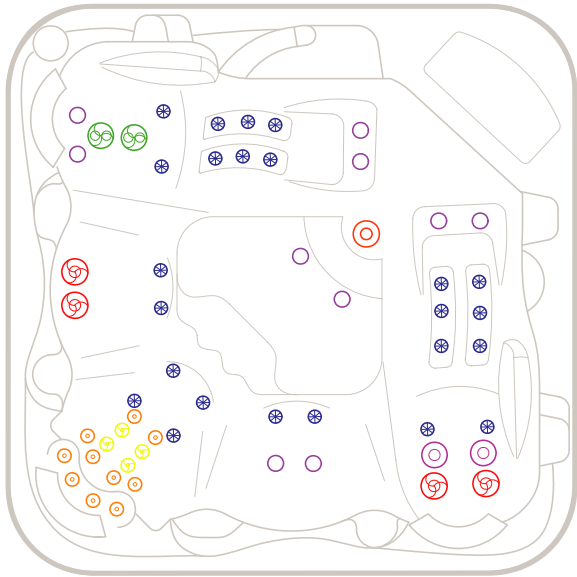

-  127mm Single Spinning Jets
-  127mm Hi Volcano Directional Jet
-  127mm Twin Spinning Jets
-  75mm Directional Jets
-  75mm Single Spinning Jets
-  50mm Directional Jets
-  50mm Twin Spinner Jets
-  40mm Air Jets

Nitro Hydroplus™

Hydroplus model, provides you with a superior hydrotherapy experience.

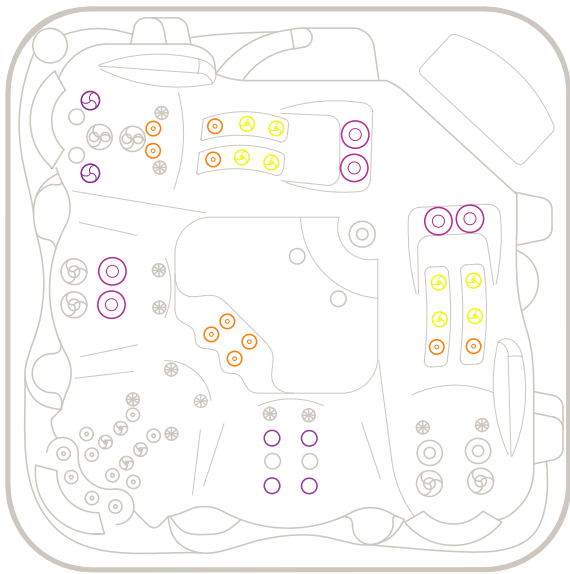

-  127mm Directional Jets
-  75mm Directional Jets
-  75mm Single Spinning Jets
-  50mm Directional Jets
-  50mm Twin Spinner Jets

* Conditions apply. Specifications may change without notice. Pictures may show options not available on all models.

Nitro™

Specifications table

	Nitro™	Nitro Hydroplus™
Dry weight	385kg	397kg
Filled weight (incl cover)	1,781.7kg	1,793.7kg
Lift weight	491.4kg	505.8kg
Intuitive spa controller	SV2	SV3
Programmable circulation pump	1	1
Jet pumps	1	2
Variable speed air blower	1	1
Variable output heater	3kW max	5.25kW max
Recommended electrical supply	15 amps	32 amps

* Conditions apply. Specifications may change without notice. Pictures may show options not available on all models.

Nitro™

Equipment location

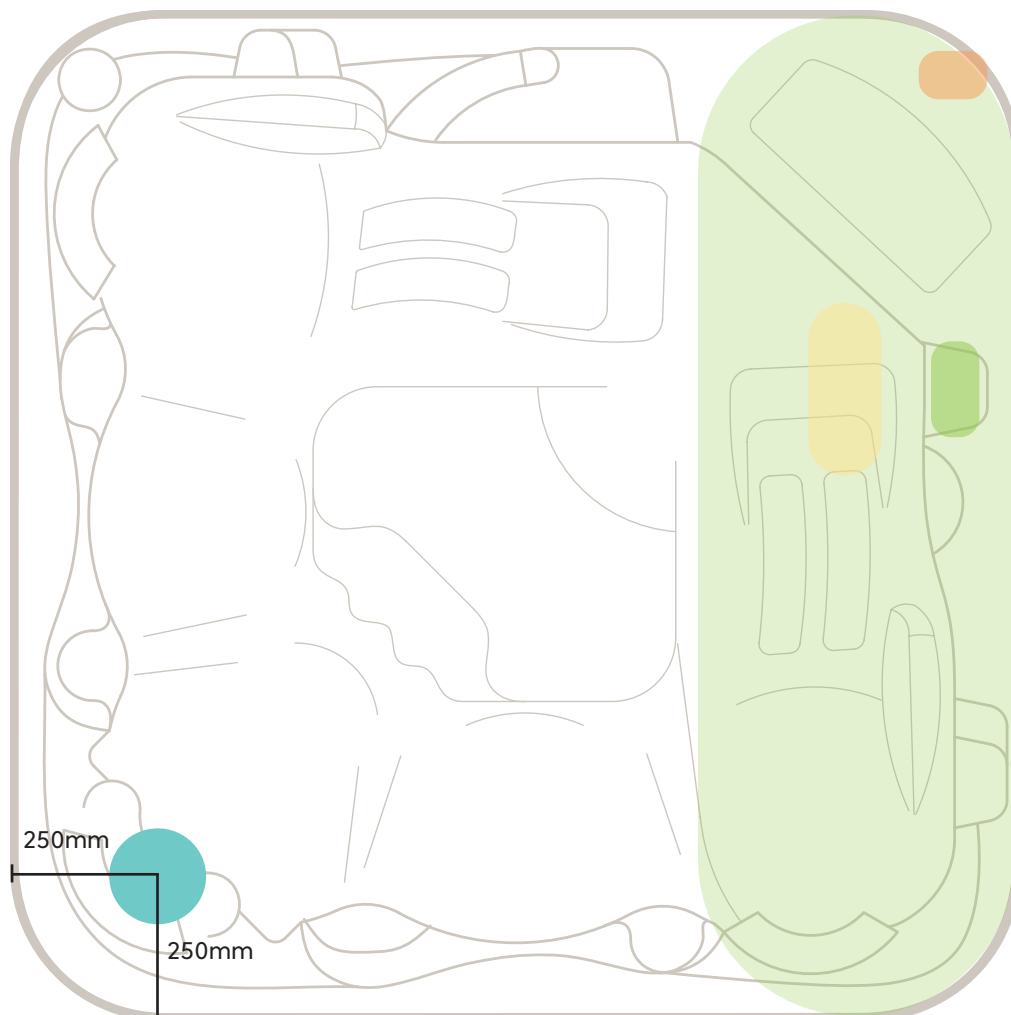


Illustration shows Nitro™ spa pool model



Equipment Bay



Drain Valve



Keypad



Circulation Pump




Conduit Access


* Conduit access should be no more than 100mm high above the concrete slab.

Note: This model has a rigid base, and if you choose to bring the piping conduit in from the bottom through the base, you will need to cut a hole into the base on-site before installation. The factory does not provide this hole. Please see the diagram above to find the location where you can drill the hole.

Nitro™

Standard Spa Cover

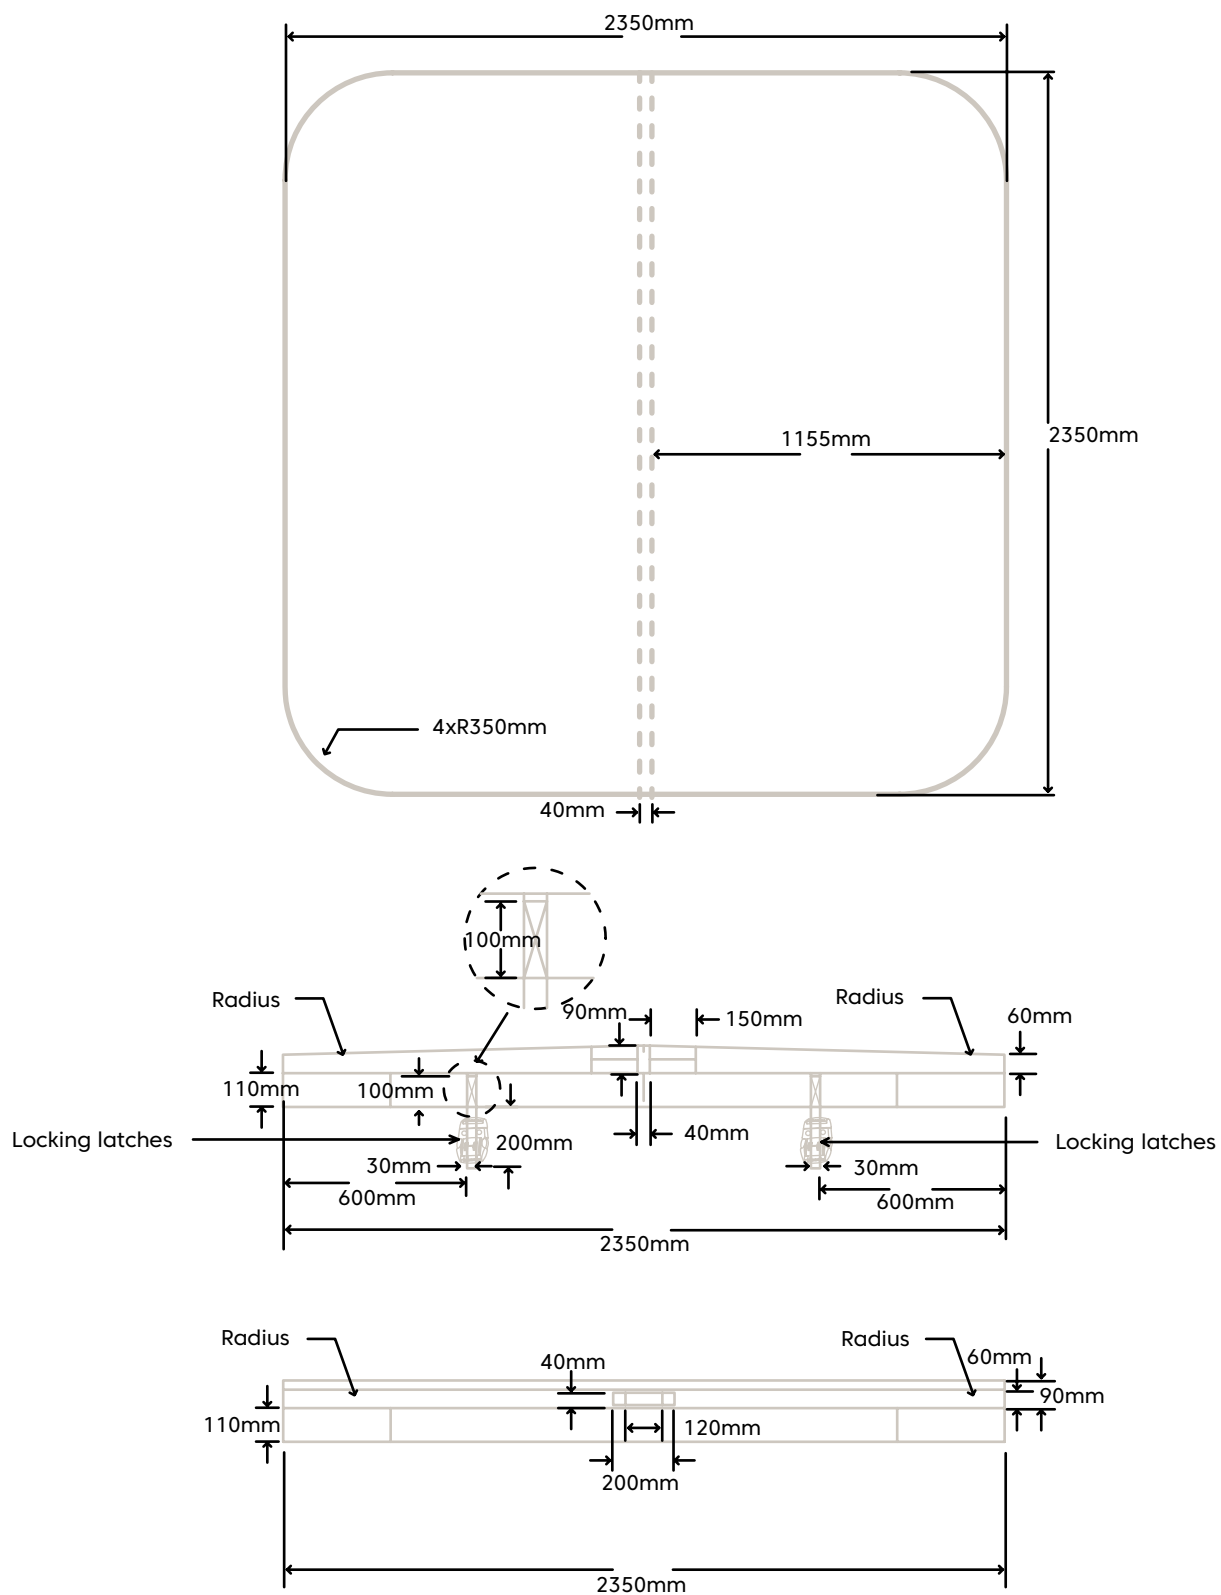



VortexTM
Spas