

GX LINE



GX

cmatic[®]
P N E U M A T I C F I T T I N G S

Innesti Rapidi in Acciaio Inox 316L
316L Stainless Steel Couplings
Coupleurs en Acier Inox 316L
Kupplungen aus Edelstahl 1.4404




GX	Innesto rapido multipresa in inox		Stainless steel multi socket quick coupling	Coupleur multiprofil en acier inox		Multiprofilkupplung aus Edelstahl
1	2	3	4	5	6	
Corpo Body Corps Körper	Ghiera di comando Command Sleeve Douille de commande Absperrhülse	Otturatore Valve Clapet Ventil	Molle Springs Ressorts Feder	Sfere Balls Billes Kugel	Guarnizioni Seals Joint d'étanchéité Dichtung	Innesti Plugs Embouts Stecker
Acciaio Inox AISI 316L (1.4404) Stainless Steel AISI 316L (1.4404) Acier Inox AISI 316L (1.4404) Edelstahl AISI 316L (1.4404)			Acciaio Inox AISI 302 Stainless Steel AISI 302 Acier Inox AISI 302 Edelstahl AISI 302	Acciaio Inox AISI 420 Stainless Steel AISI 420 Acier Inox AISI 420 Edelstahl AISI 420	FPM FPM FPM FPM	Acciaio Inox AISI 316L (1.4404) Stainless Steel AISI 316L (1.4404) Acier Inox AISI 316L (1.4404) Edelstahl AISI 316L (1.4404)




-20°C ÷ 150°C



0 ÷ 15 bar

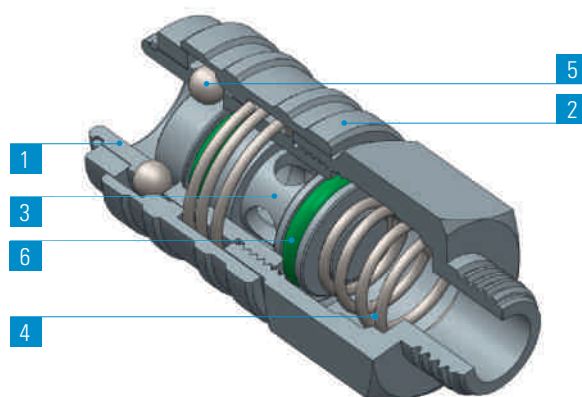


Intercambiabilità con i profili Suitable with following plugs profiles Interchangeable avec les suivants profils Austauschbar mit folgenden Profilen	Portata Flow rate Débit Durchfluß (6 bar - Δp = 1bar)
---	---




Profilo Europeo
European Profile
Profil européen
Europäisches Profil

820




Profilo ISO 6150 B
ISO 6150 B Profile
Profil ISO 6150 B
ISO 6150 B Profil

715




Profilo Svedese
Standard Swedisch Profile
Profil Standard Suédois
Standard schwedisches Profil

725




Profilo Italiano
Standard Italian Profile
Profil Standard Italien
Standard Italienisches Pro-
fil

670



Profilo MIL C4109
MIL C4109 Profile
Profil MIL C4109
MIL C4109 Profil

715



Profilo ARO 210
ARO 210 Profile
Profil ARO 210
ARO 210 Profil

705

Scala 1:1 - Scale 1:1 - Echelle 1:1 - Maßstab 1:1


GX 10-11

Innesto rapido con filetto maschio

Male coupling

Coupleur mâle

Einschraubkupplung

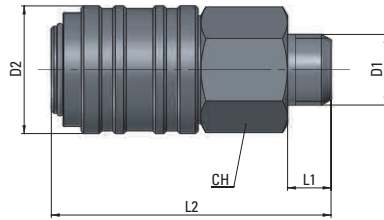

Type	D1	D2	L1	L2	CH	g $\Delta\Delta$
11 00 14	G1/4	23,5	8	51,5	21	87,8
11 00 38	G3/8	23,5	9	51,5	21	86,7


GX 10-12

Innesto rapido con filetto femmina

Female coupling

Coupleur femelle

Aufschraubkupplung

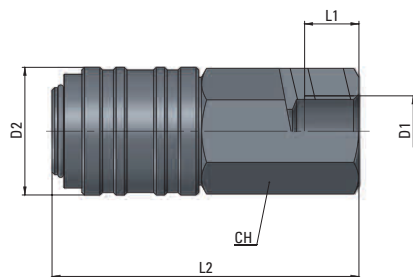

Type	D1	D2	L1	L2	CH	g $\Delta\Delta$
12 00 14	G1/4	23,5	10	56,5	21	110,9
12 00 38	G3/8	23,5	10	58	21	106,3


GX 10-20

Innesto con filetto maschio,
profilo europeo

Male plug according
to european profile

Embout mâle selon profil européen

Stecker gemäss europäisches
Profil, Einschraub



Type	D1	L1	CH	g $\Delta\Delta$
20 00 14	G1/4	33	17	20,5
20 00 38	G3/8	33	21	30,4


GX 10-21

Innesto con filetto femmina,
profilo europeo

Female plug according
to european profile

Embout femelle selon
profil européen

Stecker gemäss europäisches
Profil, Aufschraub



Type	D1	L1	CH	g $\Delta\Delta$
21 00 14	G1/4	34,5	17	23,6
21 00 38	G3/8	35	21	31,7
21 00 12	G1/2	38	24	39,3