



PU LINE



cmatic[®]
P N E U M A T I C F I T T I N G S

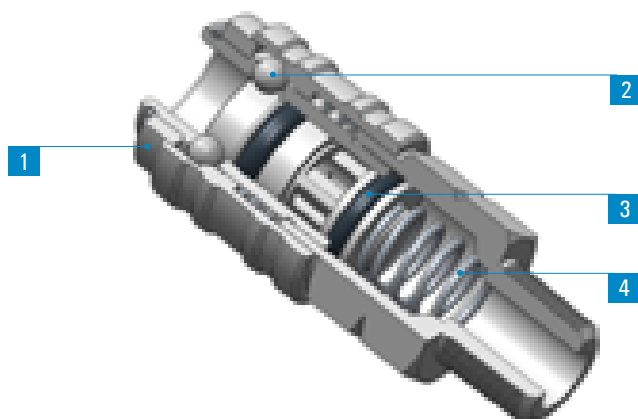

Innesti Rapidi NPT
NPT Couplings
Coupleurs, NPT
Kupplungen, NPT








PU 10		Innesto rapido multipresa	Multi socket quick coupling	Coupleur multiprofil	Multiprofilkupplung
1		2		3	4
Corpo Body Corps Körper		Sfere Balls Billes Kugel		Guarnizioni Seals Joint d'étanchéité Dichtung	Molle Springs Ressorts Feder
Ottone UNI EN 12164 CW614N Nichelato Brass UNI EN 12164 CW614N Nickel plated Laiton UNI EN 12164 CW614N Nickelé Ms Vernickelt UNI EN 12164 CW614N		Acciaio Inox AISI 420 Stainless Steel AISI 420 Acier Inox AISI 420 Edelstahl AISI 420		NBR NBR NBR NBR	Acciaio Inox AISI 302 Stainless Steel AISI 302 Acier Inox AISI 302 Edelstahl AISI 302


-20°C ÷ 80°C


0 ÷ 15 bar



Intercambiabilità con i profili Suitable with following plugs profiles Interchangeable avec les suivants profils Austauschbar mit folgenden Profilen		Portata Flow rate Débit Durchfluß	Nl/min (6 bar · Δp = 1bar)
	Profilo Europeo European Profile Profil européen Europäisches Profil	820	
	Profilo ISO 6150 B ISO 6150 B Profile Profil ISO 6150 B ISO 6150 B Profil	715	
	Profilo Svedese Standard Swedish Profile Profil Standard Suédois Standard schwedisches Profil	725	
	Profilo Italiano Standard Italian Profile Profil Standard Italien Standard Italienisches Profil	670	
	Profilo MIL C4109 MIL C4109 Profile Profil MIL C4109 MIL C4109 Profil	715	
	Profilo ARO 210 ARO 210 Profile Profil ARO 210 ARO 210 Profil	705	

Scala 1:1 - Scale 1:1 - Echelle 1:1 - Maßstab 1:1


PU 10-11

Innesto rapido con filetto maschio

Male coupling

Coupleur mâle

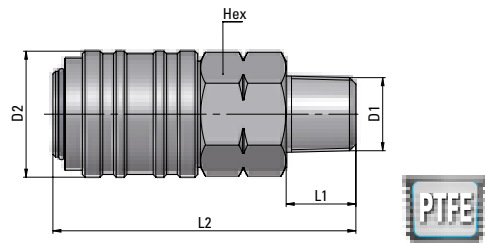Einschraubkupplung



Type	D1 NPTF	D2	L1	L2	CH	g Δ
11 00 1/4	1/4	23,5	13	56,5	20	90,9
11 00 3/8	3/8	23,5	13	56,5	20	99,3
11 00 1/2	1/2	23,5	17	59,5	24	129,2


PU 10-12

Innesto rapido con filetto femmina

Female coupling

Coupleur femelle

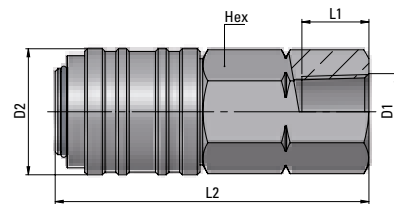Aufschraubkupplung



Type	D1 NPTF	D2	L1	L2	CH	g Δ
12 00 1/4	1/4	23,5	12,5	58,5	20	113
12 00 3/8	3/8	23,5	12,5	58,5	20	104
12 00 1/2	1/2	23,5	13,5	62	24	140,5