

cmatic[®]
P N E U M A T I C F I T T I N G S



PUX LINE



PUX

Innesti Rapidi in Acciaio Inox 316L NPT
316L Stainless Steel Couplings, NPT
Coupleurs en Acier Inox 316L, NPT
Kupplungen aus Edelstahl 1.4404, NPT




PUX	Innesto rapido multipresa in inox		Stainless steel multi socket quick coupling	Coupleur multiprofil en acier inox		Multiprofilkupplung aus Edelstahl
1	2	3	4	5	6	
Corpo Body Corps Körper	Ghiera di comando Command Sleeve Douille de commande Absperrhülse	Otturatore Valve Clapet Ventil	Molle Springs Ressorts Feder	Sfere Balls Billes Kugel	Guarnizioni Seals Joint d'étanchéité Dichtung	Innesti Plugs Embouts Stecker
Acciaio Inox AISI 316L (1.4404) Stainless Steel AISI 316L (1.4404) Acier Inox AISI 316L (1.4404) Edelstahl AISI 316L (1.4404)			Acciaio Inox AISI 302 Stainless Steel AISI 302 Acier Inox AISI 302 Edelstahl AISI 302	Acciaio Inox AISI 420 Stainless Steel AISI 420 Acier Inox AISI 420 Edelstahl AISI 420	FPM FPM FPM FPM	Acciaio Inox AISI 316L (1.4404) Stainless Steel AISI 316L (1.4404) Acier Inox AISI 316L (1.4404) Edelstahl AISI 316L (1.4404)



-20°C ÷ 150°C




0 ÷ 15 bar

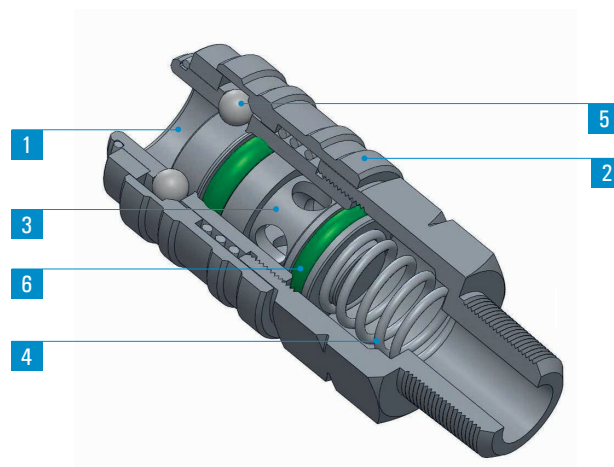

Intercambiabilità con i profili
Suitable with following plugs profiles
Interchangeable avec les suivants profils
Austauschbar mit folgenden Profilen

Portata
Flow rate
Débit
Durchfluß
NI / min
(6 bar - Δp = 1bar)




Profilo Europeo
European Profile
Profil européen
Europäisches Profil

820




Profilo ISO 6150 B
ISO 6150 B Profile
Profil ISO 6150 B
ISO 6150 B Profil

715




Profilo Svedese
Standard Swedisch Profile
Profil Standard Suédois
Standard schwedisches Profil

725




Profilo Italiano
Standard Italian Profile
Profil Standard Italien
Standard Italienisches Profil

670



Profilo MIL C4109
MIL C4109 Profile
Profil MIL C4109
MIL C4109 Profil

715



Profilo ARO 210
ARO 210 Profile
Profil ARO 210
ARO 210 Profil

705

Scala 1:1 - Scale 1:1 - Echelle 1:1 - Maßstab 1:1


PUX 10-11

Innesto rapido con filetto maschio

Male coupling

Coupleur mâle

Einschraubkupplung

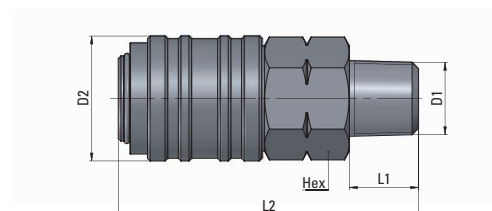

Type	D1 NPTF	D2	L1	L2	HEX	g
11 00 1/4	1/4	23,5	13	56,5	21	-
11 00 3/8	3/8	23,5	13	55,5	21	-


PUX 10-12

Innesto rapido con filetto femmina

Female coupling

Coupleur femelle

Aufschraubkupplung

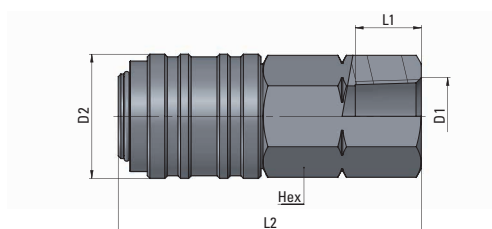

Type	D1 NPTF	D2	L1	L2	HEX	g
12 00 1/4	1/4	23,5	12,5	57,5	21	-
12 00 3/8	3/8	23,5	12,5	58,5	21	-


PUX 10-20

Innesto con filetto maschio,
profilo ISO6150 B-12

Male plug according
to ISO6150 B-12 profile

Embout mâle selon profil
ISO6150 B-12

Stecker gemäss ISO6150 B-12
Profil, Einschraub

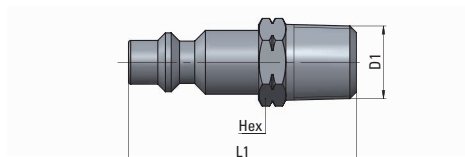

Type	D1 NPTF	L1	HEX	g
20 00 1/4	1/4	42	14	23,3
20 00 3/8	3/8	42	18	-


PUX 10-21

Innesto con filetto femmina,
profilo ISO6150 B-12

Female plug according
to ISO6150 B-12 profile

Embout femelle selon
profil ISO6150 B-12

Stecker gemäss ISO6150 B-12
Profil, Aufschraub

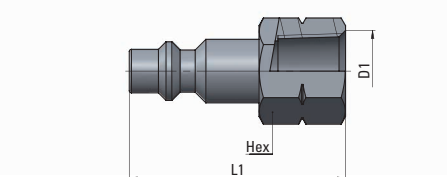

Type	D1 NPTF	L1	HEX	g
21 00 1/4	1/4	41	17	-
21 00 3/8	3/8	42	21	41