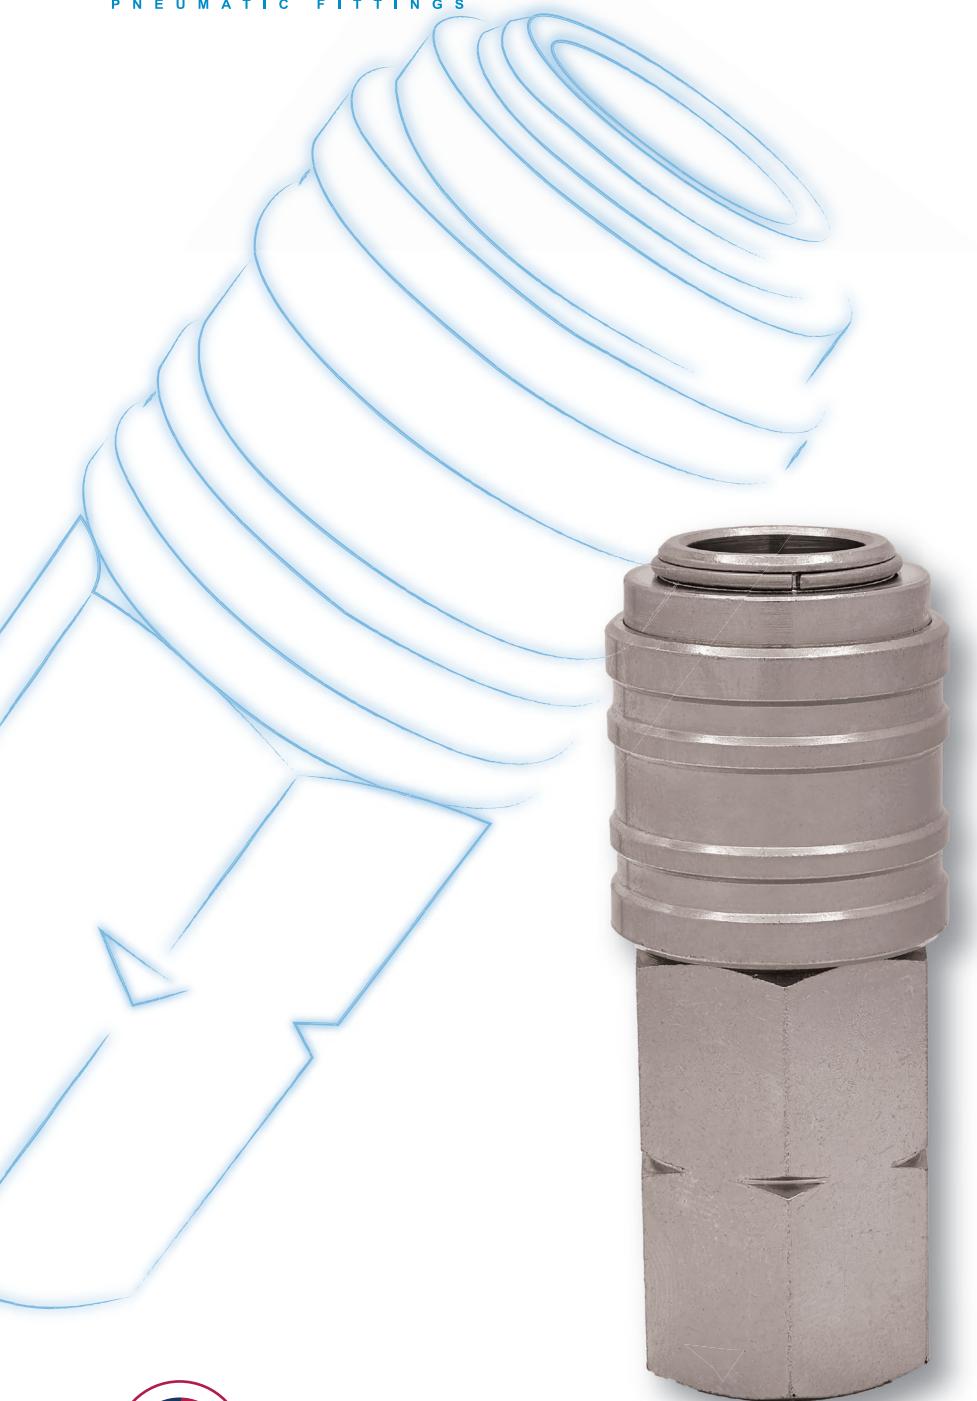




PU LINE



IT

Innesti Rapidi NPT

Innesti rapidi in ottone con filettatura NPT. Nichelatura elettrolitica.

EN

NPT Couplings

Electrolytic Nickel-plated brass quick couplings available with NPT threads.

FR

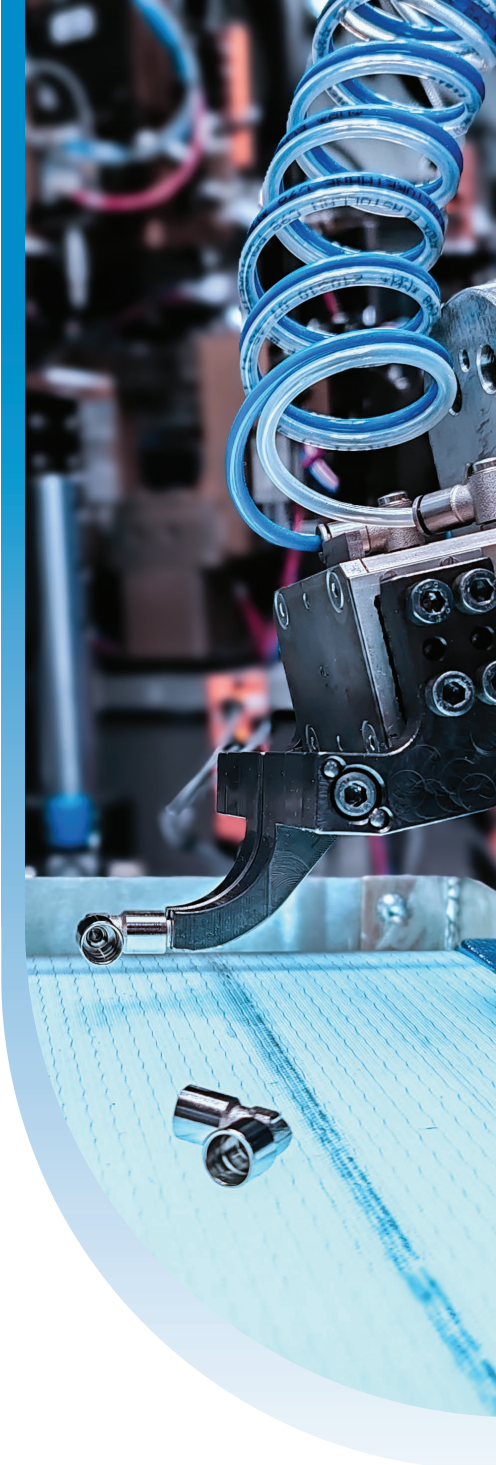
Coupleurs, NPT

Coupleurs en laiton avec filetage NPT. Nickelage électrolytique.

DE

Kupplungen, NPT

Schnellkupplungen aus Messing mit NPT-Gewinde. Elektrolitisch vernickelt.



PU 10

Innesto rapido multipresa

Multi socket quick coupling

Coupleur multiprofil

Multiprofilkupplung

1 Corpo
Body
Corps
Körper

Ottone UNI EN 12164 CW614N, nichelato
Brass UNI EN 12164 CW614N, nickel plated
Laiton UNI EN 12164 CW614N, nickelé
Messing UNI EN 12164 CW614N, vernickelt

2 Sfere
Balls
Billes
Kugel

Acciaio inox AISI 420
Stainless steel AISI 420
Acier inox AISI 420
Edelstahl AISI 420

3 Guarnizioni
Seals
Joint d'étanchéité
Dichtung

NBR
NBR
NBR
NBR

4 Molle
Springs
Ressorts
Feder

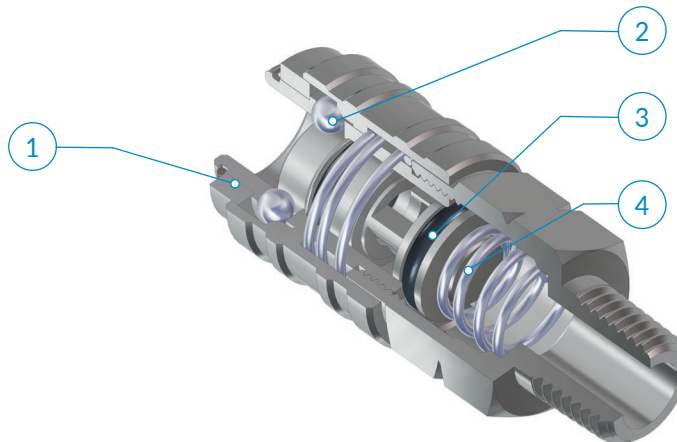
Acciaio inox AISI 302
Stainless steel AISI 302
Acier inox AISI 302
Edelstahl AISI 302



-20° ÷ 80°C



15 bar







Campi di applicazione:
Impianti pneumatici

Application fields:
Pneumatic circuits

Domaines d'application:
Circuits pneumatiques

Anwendungsbereiche:
Pneumatische Anlagen

Intercambiabilità con i profili Suitable with following plugs profiles Interchangeable avec les suivants profils Austauschbar mit folgenden Profilen		Portata Flow rate Débit Durchfluß NI/min (6 bar - Δp = 1bar)
	Profilo Europeo European Profile Profil européen Europäisches Profil	820
	Profilo ISO 6150 B ISO 6150 B Profile Profil ISO 6150 B ISO 6150 B Profil	715
	Profilo Svedese Standard Swedisch Profile Profil Standard Suédois Standard schwedisches Profil	725
	Profilo Italiano Standard Italian Profile Profil Standard Italien Standard Italienisches Profil	670
	Profilo MIL C4109 MIL C4109 Profile Profil MIL C4109 MIL C4109 Profil	715
	Profilo ARO 210 ARO 210 Profile Profil ARO 210 ARO 210 Profil	705

Scala 1:1 - Scale 1:1 - Echelle 1:1 - Maßstab 1:1

PU 10-11



Innesto rapido con filetto maschio

Male coupling

Coupleur mâle

Einschraubkupplung

Type	D1	D2	L1	L2	H1	g 
11 00 1/4	1/4 NPTF	23,5	13	56,5	20	90,9
11 00 3/8	3/8 NPTF	23,5	13	56,5	20	99,3
11 00 1/2	1/2 NPTF	23,5	17	59,5	24	129,2

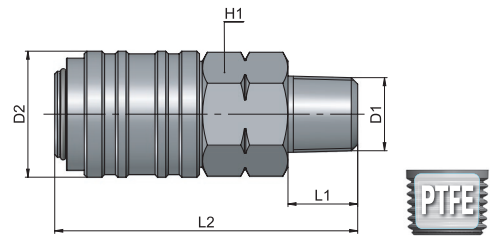

PU 10-12



Innesto rapido con filetto femmina

Female coupling

Coupleur femelle







Aufschraubkupplung

Type	D1	D2	L1	L2	H1	g 
12 00 1/4	1/4 NPTF	23,5	12,5	58,5	20	113
12 00 3/8	3/8 NPTF	23,5	12,5	58,5	20	104
12 00 1/2	1/2 NPTF	23,5	13,5	62	24	140,5

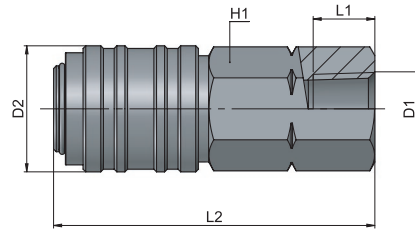

PU
LINE

AP	55
AR	63
AV	221
CO	157
CX	255
EV	217
GU	119
GU Safety	135
GX	281
GX Safety	291
HP	317
MA	27
MB	41
MC	83
MF	235
MM	333
MO	93
MP	323
MT	339
MV	171
MX	241
MY	229
OX	261
PA	113
PE	79
PM	329
PN	67
PT	347
PU	131
PU Safety	149
PUX	287
PV	203
PVX	311
PX	249
QO	363
RA	101
RF	269
RT	355
RX	275
Tools	369
Tubings	375
VF	295
VT	359
VX	299

Type	Profiles				Pag. ref.
GU41	ISO 6150 C-10	5,5		BSP	136
GU42	ISO 6150 B-12 US MIL4109	5,5		BSP	138
PU42	ISO 6150 B-12 US MIL4109	5,5		NPT	150
GU43	ISO 6150 C-14	8		BSP	140
GU44	ISO 6150 B-15	8		BSP	142
PU44	ISO 6150 B-15	8		NPT	152
GU45	ARO 210	5,5		BSP	144
PU45	ARO 210	8		NPT	154
GU46	European Profile	7,4		BSP	146
GX46 inox	European Profile	7,4		BSP	292