# **BuzziSkin | BuzziFelt**

# **Specifications BuzziSkin**

**Composition** 100% Recycled P.E.T. Felt, selfadhesive backing

**Weight** 1.000 g/m<sup>2</sup> | 29.49 oz/yd<sup>2</sup>

Width 98 cm | 38.58"

**Thickness** 6,1 mm | 0.24"

**Abrasion resistance** >7.000 Martindale

Flammability EU: EN 13501.1:2013 Class C-s2,d0

USA: ASTM E84 Class A certified

Fastness to light EU: 6-7 | USA 5 ▲ Application & Installation Restrictions see installation manual



# **Specifications BuzziFelt**

Composition 100% Recycled P.E.T. Felt, latex backing

**Weight** 1.000 g/m<sup>2</sup> | 29.49 oz/yd<sup>2</sup>

**Width** 170 cm | 66.93"

**Thickness** 6 mm | 0.236" **Abrasion resistance** >7.000 Martindale

Flammability EU: EN 13501.1 + A1/2009 Class B-s1,d0

USA: ASTM E84 Class A certified

Fastness to light EU: 6-7 | USA 5



### Maintenance BuzziSkin

Vacuum clean regularly. Don't wash. Don't remove the BuzziSkin from the product. Treat spillages immediately. Professional dry clean or wipe clean with a pH neutral soap and a damp cloth.



## **Maintenance BuzziFelt**

Vacuum clean regularly. Don't wash. Don't remove the BuzziFelt from the product. Treat spillages immediately. Professional dry clean or wipe clean with a pH neutral soap and a damp cloth.









# **BuzziSkin | BuzziFelt**






























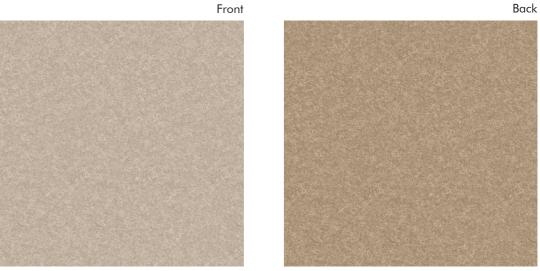

FE-Mokka 74

