

Test Report


Report No.: GZES171101929431

Date: 2017-12-26

The following sample(s) was/were submitted and identified on behalf of the client as:

Applicant: BuzziSpace
Groeningenlei 141 2550 Kontich

Manufacturer:



Testing location/address: SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch
198 Kezhu Road, Science City, Economic & Technology Development Area,
Guangzhou, Guangdong, China

Standard(s): IES LM-79-08

Test item description: BuzziSpace LED Suspended Pendant Lamp

Trade Mark/Brand:



Model/Type reference: BuzziSol Globe Suspended

Ratings: 32 W

Test result: See Page 4-5

Remark: Throughout this report a comma (point) is used as the decimal separator.
When determining for test conclusion, measurement uncertainty of tests has been considered.




Ivory Lu
Reviewer
E&E Safety Laboratory

Justin Xie
Sr Project Engineer

This document is issued by the Company subject to its General Conditions of Service, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Copy of marking plate

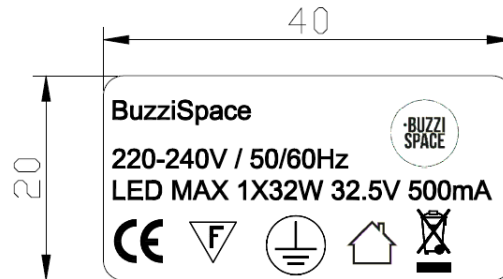

Unit: mm

Summary of testing:

The tests were conducted according to IES LM-79-08 and the client's requirements. Installed the glass shade A-0000002294 to the sample and applied 120 VAC, 60 Hz for all the tests according to the clients requirements.

Test item particulars

Lamp cap Class Spended Frosted
 Lamp identification LED (Bridgelux bxre-30G0800-B-23)
 Commission received from Manufacturer
 Date 2017-11-16
 Ambient temperature 25 °C
 IP number IP 20

Possible test case verdicts:

- test case does not apply to the test object : N/A (not applicable)
 - test object does meet the requirement : P (Pass)
 - test object does not meet the requirement : F (Fail)

Testing

Date of receipt of test item : 2017-11-22
 Date (s) of performance of tests..... : 2017-11-23 to 2017-11-30

General product information:

Model BuzziSol Globe Suspended is a product consisted of a LED control gear and a LED module, rated for 220 - 240 VAC, 50 Hz / 60 Hz, 32 W. Glass shade A-0000002294, is for Model BuzziSol Globe Suspended.

1 Test conditions

Before measurements are taken, there is no seasoning for the LED luminaire(s), and the luminaire(s) was measured after reaching the stabilization.

The Electrical quantities are measured by means of a calibrated Digital Power Meter Yokogawa WT210.

The sample was mounted in accordance with the manufacturer's installation instructions for intended orientation.

The Total Luminous Flux and Light Distribution were measured by a calibrated Type C Goniophotometer.



The Color Characteristics were measured by a calibrated Everfine Integrating Sphere System which consists of an integrating sphere, spectroradiometer and software.

The ambient temperature during measurements was $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$.

2 Test Results

I) The Electrical Power, Luminous Flux and Light Distribution according to IES LM-79-08

Test Voltage: 120 V AC
 Power: 19,34 W
 Total Luminous Flux: 1499 lm
 Luminous Efficacy: 77,5 lm/W

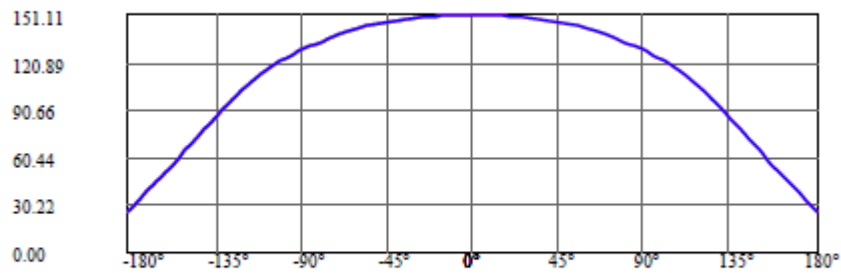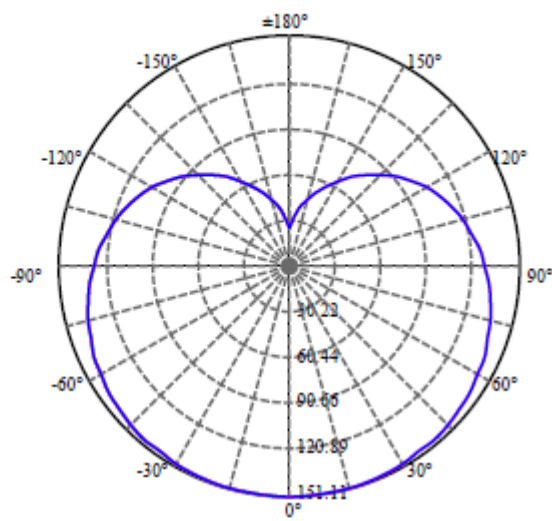

C270(Max): ———
 C0/C180: ———
 C90/C270: ———

Test Report


Report No.: GZES171101929431

Date: 2017-12-26

II) Color Characteristics according to IES LM-79-08

Test Voltage:	120 V AC
Chromaticity Coordinate	x=0, 4326; y=0, 3955 u'=0, 2515; v'=0, 5173
Correlated Color Temperature	3002K
Render Index Ra	92,6
Peak Wavelength	620 nm

Spectrum

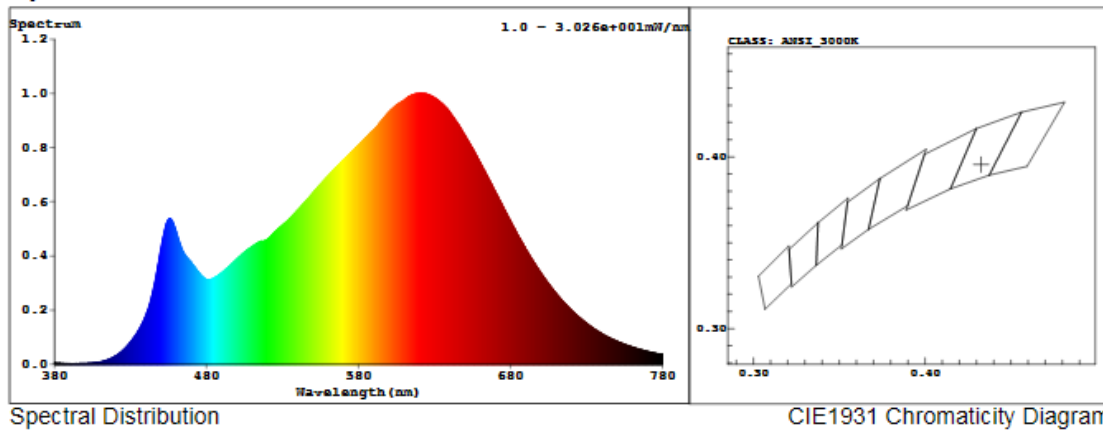

Test Report

Report No.: GZES171101929431

Date: 2017-12-26

Photo documentation:

Details of: View of the product BuzziSol Globe Suspended installed the glass shade A-0000002294

View:


- general
- front
- rear
- right
- left
- top
- bottom



Details of: View of product BuzziSol Globe Suspended and it's shade A-0000002294

View:

- general
- front
- rear
- right
- left
- top
- bottom

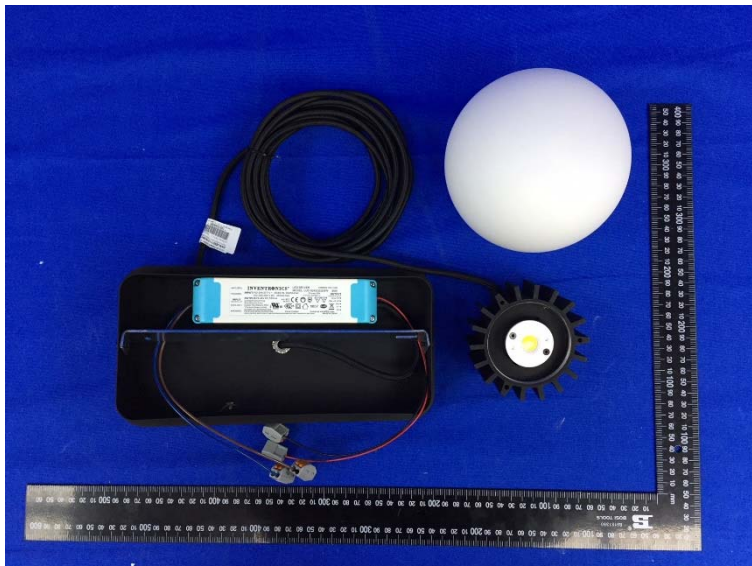

--- End of Report ---