



BuzziSkin Printed

INSTALLATION MANUAL



Technical info

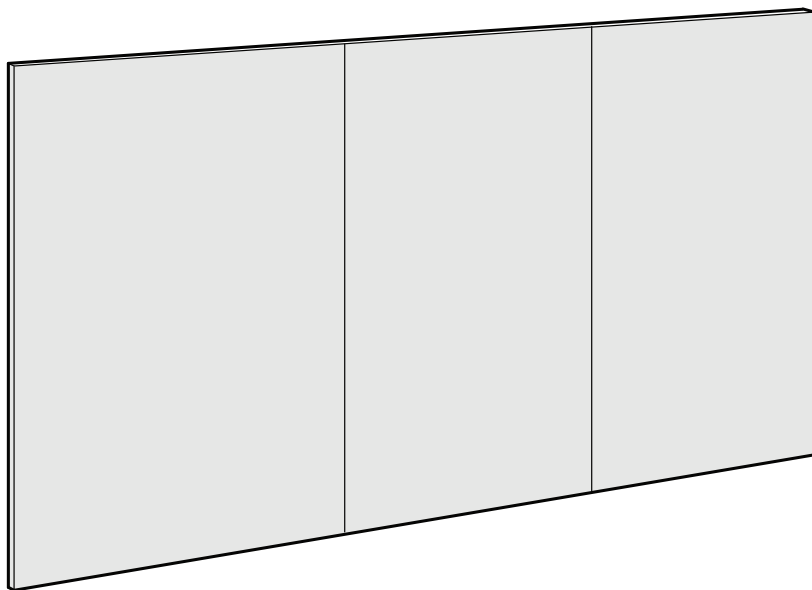

17
DoP_P0066-Skin-01
EN15102
0493
Wall Covering
www.buzzi.space
C-s2,do
Formaldehyd: pass
VCM: pass
Heavy metals: pass

The felt layer of BuzziSkin Printed is made of 100% recycled PET bottles and has excellent acoustic characteristics.

No claims concerning deviation in color, size, and thickness can be accepted. Because of the nature of the product this can vary. The risk is more likely in different batches.

Even from the same batch we can not guarantee that there will be no color differences. However the risk will be lower.

Please specify the batch number if a re-order needs to be done.

If possible we deliver from the same batch.

USE

BuzziSkin Printed can be used on all surfaces with the following exception.

- BuzziSkin Printed can not be applied on vinyl or any other plasticized surface.
- BuzziSkin Printed is not suitable as seating because it will become fluffy.
- We do not recommend installing BuzziSkin Printed to the ceiling or the floor.

INSTALLATION TIPS

▲ When opening the boxes keep notice of the batch number.
(Charge number)

After installation, no claims are accepted.


It's not intended to align the image at the seams.

Installation should be done by professionals!

- Please keep the direction of the BuzziSkin Printed in mind. This is printed on the back of the foil.
- Do not apply on bare, untreated surfaces. Treat the surface with water-based primer before applying BuzziSkin Printed for optimal adhesion results.
- The surface should be smooth, dry, well degreased and dust free.
- Pre-measure the whole surface and cut the BuzziSkin Printed with a sharp knife.
- All corners must be made of separate lanes.
- For easy mounting it is possible to use wallpaper paste but this is not necessary.
- BuzziSkin Printed is not intended to mask roughnesses.

BuzziSkin Printed



2 PERS. 




Excl.



Optional: Wallpaper paste for easy positioning.



Incl.

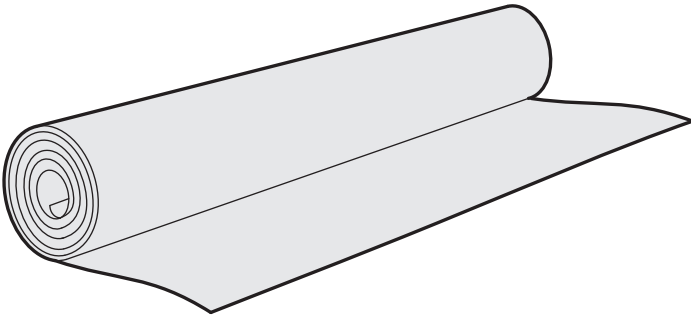



Variation in color, thickness and density may occur.

1




Treat the surface with water-based primer before applying BuzziSkin Printed for optimal adhesion results. The surface should be smooth, dry, well degreased and dust free.

2 (optional)





3


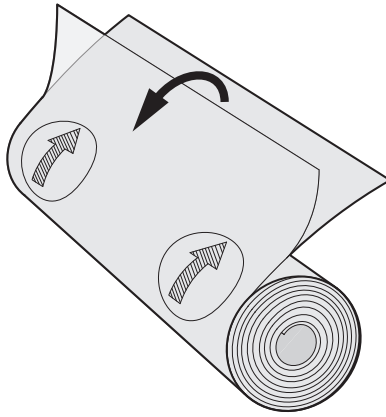


Keep notice of the arrow direction


4

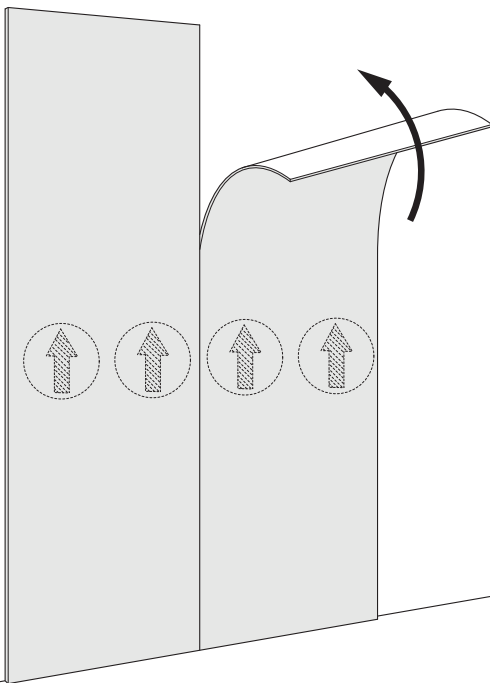



DO




DON'T



DO



DON'T



BuzziSpace
Groeningenlei 141
2550 Antwerp, Kontich
Belgium
☎ +32 (0)3 846 10 00
✉ info@buzzi.space
🌐 www.buzzi.space



Doc nr.: A-0000001973/3
Last update: 11/01/2019