

EQUIVALENT SOUNDABSORPTION AREA PER OBJECT conform ISO 354:2003




principal: BuzziSpace

#3; BuzziShield Light L (H 20 cm)



— 1/3 oct.
* 1/1 oct.

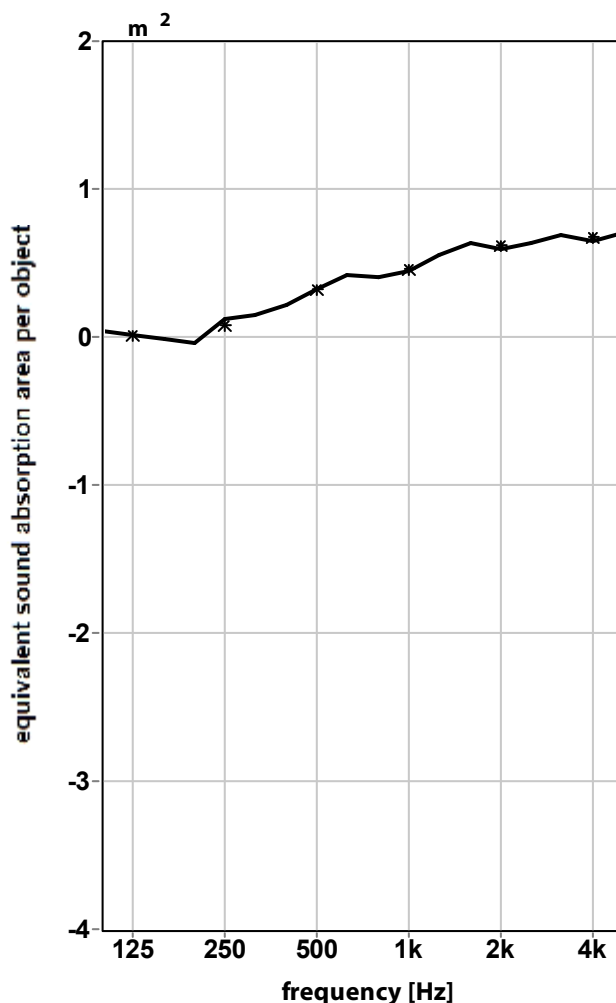

1/3 oct.	0,04	-0,04	0,22	0,40	0,63	0,69
	0,01	0,12	0,33	0,44	0,59	0,65
	-0,02	0,15	0,42	0,55	0,64	0,70
1/1 oct.	0,01	0,08	0,32	0,46	0,62	0,68

Absorb, versie 5.9 mode 9, PM: RA, file: a4183 E#:1-36 F#:139-174 A#:175 T₁ = 17,1 °C T₂ = 17,4 °C p₁ = 102,2 kPa p₂ = 102,2 kPa h₁ = 51,9 % h₂ = 50,8 %

volume reverberation room: 214 m³

number of elements: 2

measured at: Peutz Laboratory for Acoustics

signal: broad-band noise

bandwidth: 1/3 octave

publication is permitted for the entire page only

Mook, measured at 15-03-2022

report A 4183-2E-RA

figure 5