

## EQUIVALENT SOUNDABSORPTION AREA PER OBJECT conform ISO 354:2003




principal: BuzziSpace

#4; BuzziShield Light L (H 60 cm)



— 1/3 oct.  
\* 1/1 oct.

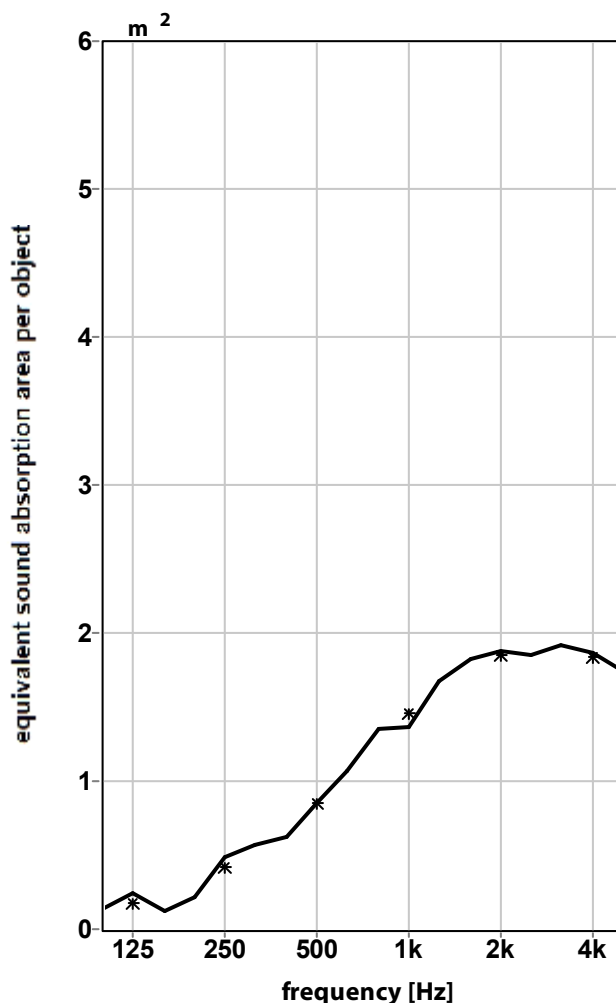

1/3 oct.	0,14	0,21	0,62	1,35	1,82	1,92
	0,24	0,48	0,85	1,37	1,88	1,86
	0,12	0,57	1,07	1,67	1,85	1,74
<b>1/1 oct.</b>	<b>0,17</b>	<b>0,42</b>	<b>0,85</b>	<b>1,46</b>	<b>1,85</b>	<b>1,84</b>

Absorb, versie 5.9 mode 9, PM: RA, file: a4183 Eh:1-36 F#:176-211 A#:212 T<sub>1</sub> = 17,1 °C T<sub>2</sub> = 17,3 °C p<sub>1</sub> = 102,2 kPa p<sub>2</sub> = 102,2 kPa h<sub>1</sub> = 51,9 % h<sub>2</sub> = 51,5 %

volume reverberation room: 214 m<sup>3</sup>

number of elements: 2

measured at: Peutz Laboratory for Acoustics

signal: broad-band noise

bandwidth: 1/3 octave

publication is permitted for the entire page only

Mook, measured at 15-03-2022

report A 4183-2E-RA

figure 6