


The Family

Model BuzziFez



LED

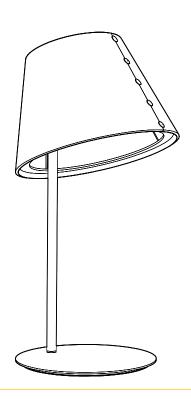

Required order information

1. Shade Color

Lighting Data

Lighting Unit

LED




Dimming



Touchbutton for on and off. Hold longer for dimming.

Power Adapter

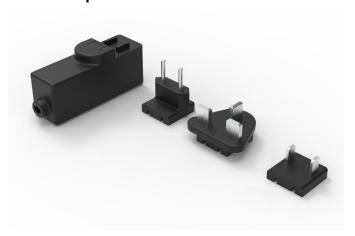

Power Adapter available for US/EU/UK Included Power Cord 1,5 m | 59.06"

Lighting specifications

BuzziFez

Lighting Unit	Voltage	Wattage	Light Output Luminaire	Efficacy (Lm/W)	CRI	Dimming	Color Temperature	UGR	Standard (stock) On request (>LT)	Color Power Cable	Color Metal Frame	Fabric Collection	Fabric Color
LED	100-240V	Max. 4,5 W	330 Lm	73	90	Touchdimmer	2700K	-	Standard	Black	Black	Use color codes below	Use color codes below



Product Data


Shade





Shade outside available in Felt: StoneGrey, Anthracite or OffWhite. Shade inside always in Fabric Ivory. The shade can be tilted 17°. Finished with glossy black push buttons.


Dimensions

BuzziFez









Weights

BuzziFez



4,2 kg | 9.26 lbs

Fabrics

Felt

Composition 100% Recycled P.E.T. Felt, latex backing

Weight 1.000 g/m2 | 29.49 oz/yd2 Abrasion resistance >7.000 Martindale

Flammability EU: EN 13501.1 + A1/2009 Class B-s1,d0

USA: ASTM E84 Class A certified

Fastness to light USA 5









Offwhite 63

StoneGrey 67

Anthracite 68

Fabric

 $\textbf{Category} \ \mathsf{A}$

Composition 70% Recycled Wool, 25% Recycled Polyacryl,

5% Recycled Other Fabrics

Weight 405 g/m² | 11.94 oz/yd²

Abrasion resistance 40.000 Martindale, 50,000 Wyzenbeek

Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette).

EN 1021.2/2006 | BS EN 1021.2/2006 (match)

USA: CAL TB 117 | ASTM E84 CLASS A

Fastness to light EU: 4 | USA 4

Fastness to rubbing EU: Wet 3-4 | Dry 4-5 Fastness to crocking USA: Wet 5 | Dry 5











Ivory 101

8 | BuzziSpace | BuzziFez Last update: 29/08/2023