



BuzziBooth

Product Specification Sheet

This document contains technical
information about the BuzziBooth



www.buzzi.space

Upholstered temporary workstation

There has been a big shift toward working in open-plan offices that have a loft-like feeling of home. While there are many benefits, the challenge is maintaining space to make a phone call or work quietly and independently. Designer Alain Gilles' solution is the BuzziBooth: a phonebooth made of sound absorbing felt that dampens outside sounds. Now you can have a moment alone even in the noisiest of surroundings. Micro-architecture for maxi spaces!

Design by Alain Gilles

General

- ◆ BuzziBooth Single | BuzziBooth Targa
Pattern: Inside: 3D Rib or 3D Diamond
Outside: Flat
- 🌲 Structure: Poplar plywood: 18 mm | 0.71"
Cover: Inside: acoustic foam covered with fabric
Outside: layer of felt covered with fabric
- 🔧 Flat Packed
- ... Light Panel
Bicolor

Acoustics



Absorption



Diffusion



Attenuation



Mid tones



High tones

Certifications



Content

Configurations	3
Pattern	6
Fabrics	6
Dimensions	8
Dimensions Worktop	11
Option BackLight / LightPanel	13

Configurations


BuzziBooth Single

- Single
 - Pattern: Inside: 3D Rib or 3D Diamond
 - Outside: Flat
 - Worktop upholstered
- Core: Poplar plywood: 18 mm | 0.71"
- Cover: Inside: acoustic foam covered with fabric
- Outside: layer of felt covered with Fabric, Trevira CS+

- Standard: Height: 216 cm | 85.04"
- Width: 129 cm | 50.79"
- Depth: 120 cm | 47.24"
- Lightboard: Height: 43,5 cm | 17.13"
- Width: 93 cm | 36.61"
- Packaging: Height: 142,5 cm | 56.10"
- Width: 44 cm | 17.32"
- Depth: 228,5 cm | 89.96"


- Booth: 88 kg | 194.01 lbs
- Packaging (including Booth): 120,5 kg | 265.66 lbs

- LightPanel EU/ US/ UK (optional)
- Worktop Antwerp Oak
- Worktop Antwerp Oak cable tray
- Worktop White Laminate


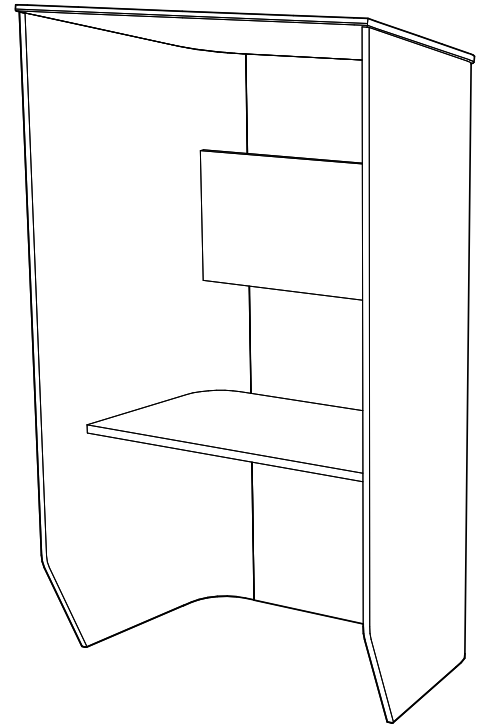


BuzziBooth Targa

-  Targa Small | Medium
Pattern: Inside: 3D Rib
Outside: Flat
- Core: Poplar plywood: 18 mm | 0.71"
Cover: Inside: acoustic foam covered with fabric
Outside: layer of felt covered with fabric
-  H 120: Fabric, Trevira CS+ | CS, Clara 2, Remix 3, Hero 2, Tonus 4, Memory 2
H 135: Fabric, Trevira CS+
- Standard: Height: 120 or 135 cm | 47.27" or 53.15"
Width: S: 130 cm | 51.18"
M: 170 cm | 66.93"
L: 210 cm | 82.68"
Depth: 115 cm | 47.24"
-  Packaging: Height: S: 130 cm | 51.18"
M: 170 cm | 66.93"
L: 210 cm | 82.68"
Width: 80 cm | 31.50"
Depth: 120 cm | 47.24"
- Booth Targa: S: 59 kg | 130.07 lbs
M: 69 kg | 152.12 lbs
L: 79 kg | 174.17 lbs
-  Packaging (including Booth Targa): S: 89 kg | 196.21 lbs
M: 99 kg | 218.26 lbs
L: 109 kg | 240.30 lbs
- Worktop Antwerp Oak
Worktop Antwerp Oak cable tray
- ... Set of 6~8 alu brackets for customer own worktop
BackLight EU/ US/ UK (optional in combination with worktop oak with cabletray)

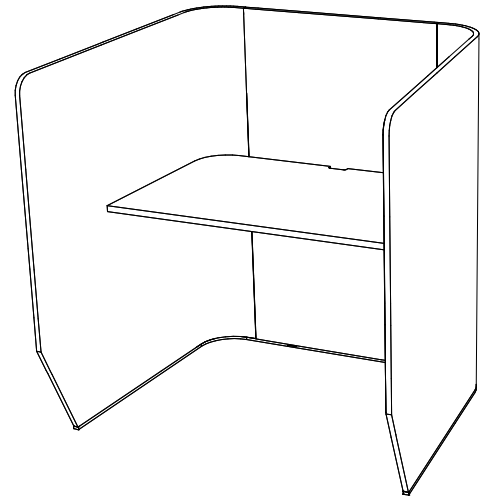

Pattern




Pattern inside:
Booth Single : 3D Rib or 3D Diamond
Booth Targa : 3D Rib

Fabrics

BuzziBooth Single: Fabric, Trevira CS+
BuzziBooth Targa: Height 120: Fabric, Trevira CS+ | CS, Clara 2, Remix 3, Hero 2, Tonus 4, Memory 2
Height 135: Fabric, Trevira CS+


Fabric (45 colors)



Category A
Composition 70% Recycled Wool, 25% Recycled Polyacryl,
5% Recycled Other Fabrics
Weight 405 g/m² | 11.94 oz/yd²
Abrasion resistance 40.000 Martindale, 50,000 Wyzenbeek
Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette).
EN 1021.2/2006 | BS EN 1021.2/2006 (match)
USA: CAL TB 117 | ASTM E84 CLASS A
Fastness to light EU: 4 | USA 4
Fastness to rubbing EU: Wet 3-4 | Dry 4-5
Fastness to crocking USA: Wet 5 | Dry 5

Trevira CS+ | CS (47 colors)




Category A
Weight 420 g/m² | 12.39 oz/yd²
Composition 100% Polyester, Trevira CS
Abrasion resistance 100.000 Martindale, 90,000 Wyzenbeek
Flammability BS 5852 part II: CRIB 5 | BS 7176 Medium Hazard
USA: CAL TB 117 | M1 | B1 | EN 1021/1-2 | C1 |
IMO Res. A652 (16)
Fastness to light EU: 6 | USA 5
Fastness to rubbing EU: Wet 4-5 | Dry 4-5
Fastness to crocking USA: Wet 5 | Dry 5

Hero 2 (24 colors)

kvadrat



Category C

Composition 97% new wool, 3% nylon

Weight 580 g/lin.m

Abrasion resistance 45.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B2 | NF D 60 013
UNI 9175 1IM | US Cal. Bull. 117-2013 | NFPA 260
IMO A.652 (16)

Fastness to light Note 5-6, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4-5

Pilling Note 3-4, EN ISO 12945



Tonus 4 (47 colors)

kvadrat



Category D

Composition 90% new wool, 10% Helanca

Weight 665 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1 | DIN 4102 B2
Önorm B1/Q1 | NF D 60 013 | UNI 9175 1IM
US Cal. Bull. 117-2013 | NFPA 260 | IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 3-5, wet 3-5

Pilling Note 3, EN ISO 12945



Memory 2 (20 colors)

kvadrat



Category E

Composition 100% Trevira CS

Weight 700 g/lin.m

Abrasion resistance

35.000 rubs acc. to the Martindale method, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1
NF D 60 013 | NF P 92 507 M1 | UNI 9175 1IM
UNI 9177 classe 1 | US Cal. Tech. Bull. 117
IMO A.652 (16)

Fastness to light Note 5-8, ISO 105-B02


Fastness to rubbing (ISO) dry 4-5, wet 4-5

Pilling Note 4, EN ISO 12945




Dimensions

BuzziBooth Single

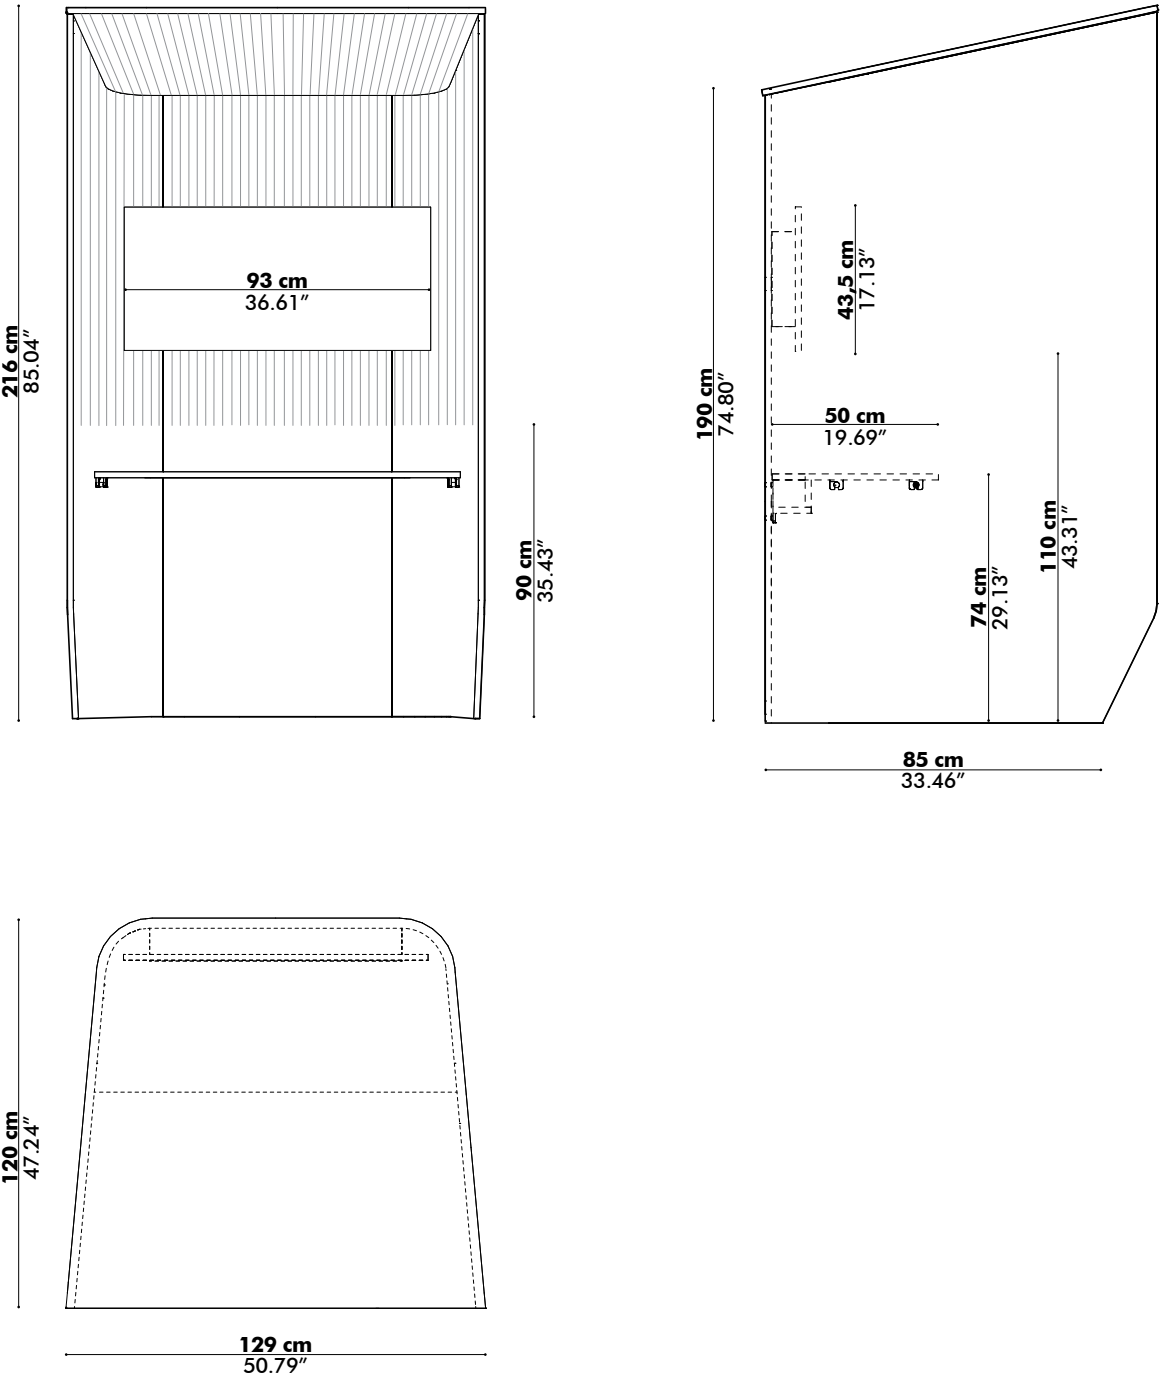


BuzziBooth Targa

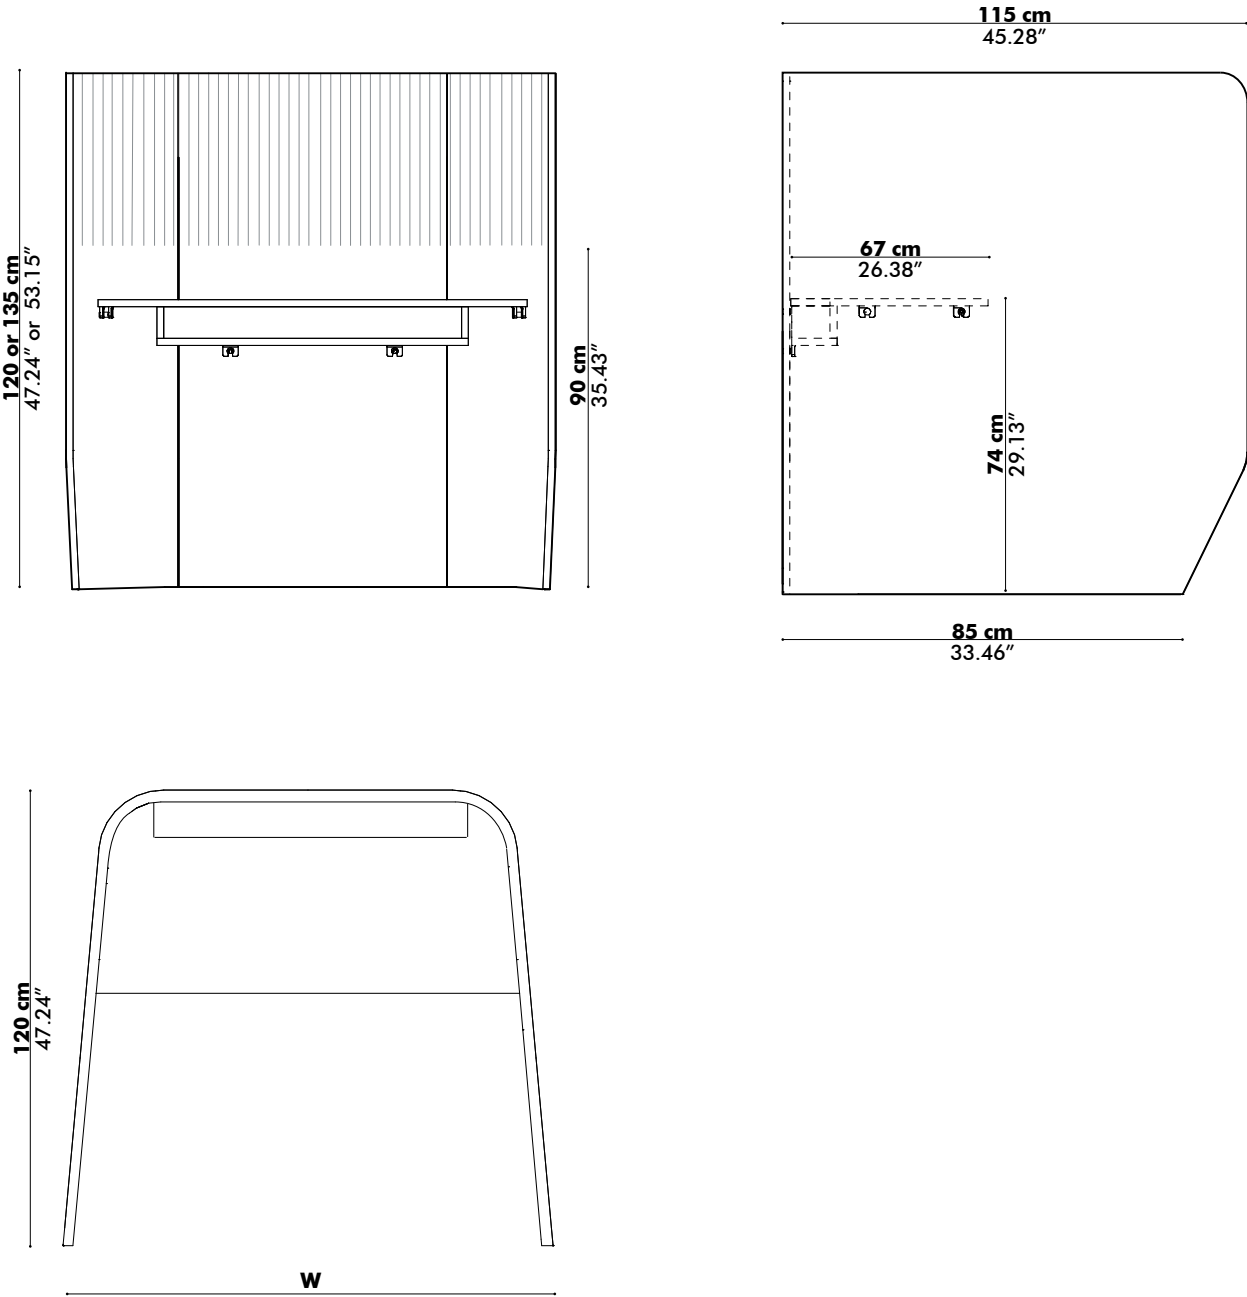


	Small	Medium
W = Width	130 cm 51.18"	170 cm 66.93"

Dimensions Worktop


Worktop in Antwerp Oak | White Laminate
without cabletray

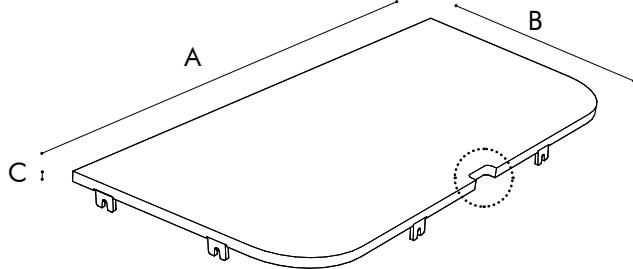


Upholstered worktop with cabletray
(Not for Targa)

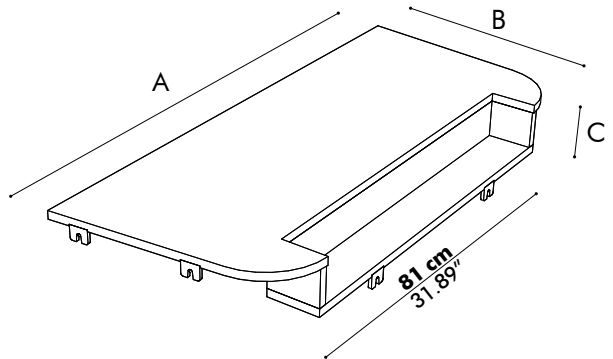

Worktop in Antwerp Oak
with cabletray

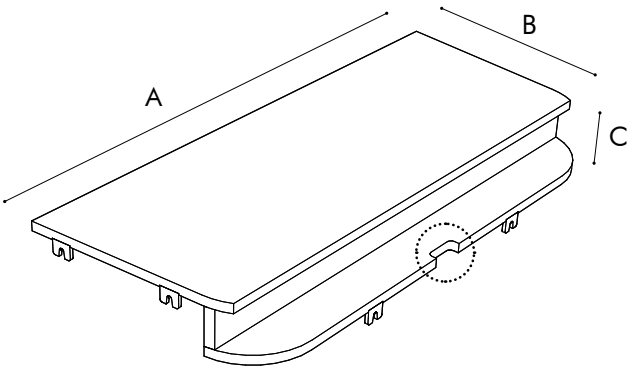

Detail

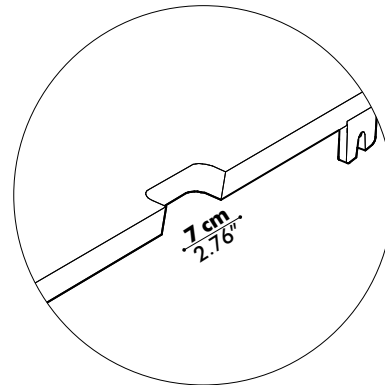

BuzziBooth Single

	'A' Width	'B' Depth	'C' Height	Weight
Upholstered worktop with cabletray	110 cm 43.31"	50 cm 19.69"	12 cm 4.72"	5,4 kg 11.90 lbs
Worktop in White Laminate- without cabletray	110 cm 43.31"	50 cm 19.69"	2 cm 0.79"	7,6 kg 16.76 lbs
Worktop in Antwerp Oak* without cabletray	110 cm 43.31"	50 cm 19.69"	2 cm 0.79"	8 kg 17.64 lbs
Worktop in Antwerp Oak* with cabletray	110 cm 43.31"	50 cm 19.69"	12 cm 4.72"	10,3 kg 22.71 lbs

*These solid wood worktops may contain knots, natural color variations and drying splits as normal features of the product. This contributes to the uniqueness of each worktop.

BuzziBooth Targa

	'A' Width	'B' Depth	'C' Height	Weight
Worktop in Antwerp Oak* with cabletray	S			S
	110 cm			10,3 kg
	43.31"	67 cm	12 cm	22.71 lbs
	M	26.38"	4.72"	M
	150 cm			14,02 kg
	59.06"			30.91 lbs
Worktop in Antwerp Oak* without cabletray	S			S
	110 cm			8 kg
	43.31"	67 cm	2 cm	17.64 lbs
	M	26.38"	0.79"	M
	150 cm			10,88 kg
	59.06"			23.99 lbs

*These solid wood worktops may contain knots, natural color variations and drying splits as normal features of the product. This contributes to the uniqueness of each worktop.

Option BackLight / LightPanel

General

- 💡 Connectable integrated LED tube
- 🌲 Material: Aluminum body, Clear PC cover
- LED: SMD 3014
- 💡 Color temperature: 3000 Kelvin
- Input Voltage / Frequency: 100 - 277 V 50/60Hz



Certifications


cULus Listed E471267 or ETL Certified
CE

Specifications per element

Wattage: 7W / element
Lumen: 700 $\pm$ 10% / element
Length: 55,5 cm - 21.85" / element
1 On-Off switch / element

Accessories

Power cable: White
4 m – 157.48"
Type B Plug (US, ...), Type G Plug (UK, ...) or Schuko Plug (BE, NL,...)
Mounting clips
Connector accessories

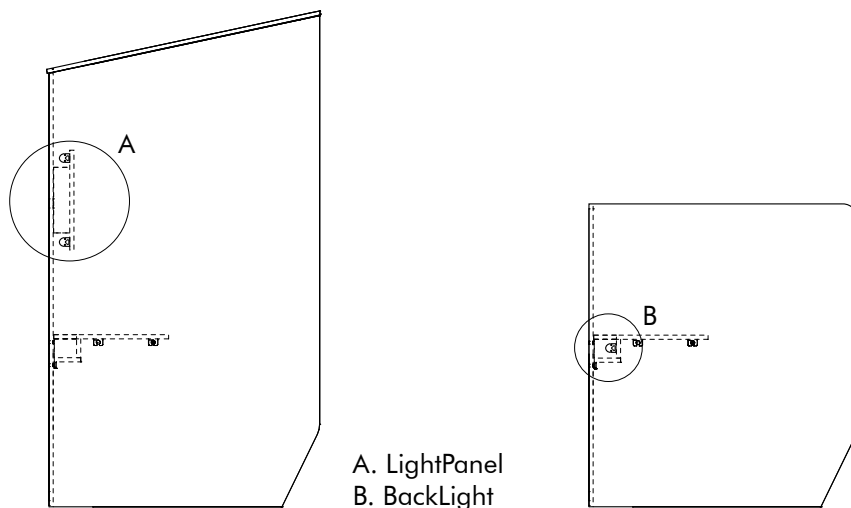

BuzziBooth

	Single	Targa	
		Small	Medium
Qty LED tubes	2	1	2
Total wattage	14W	7W	14W
LED tube dimensions	2x 55,5 cm 2x 21.85"	2x 55,5 cm 2x 21.85"	2x 111 cm 2x 43.70"
Total lumen	700 up 700 down	700	1400
Power cable (4 m)	1	1	1
Configuration	A	B	C

Configurations

- A** Two LED tube elements linked by a 50 cm - 19.69" connection cable, located behind the light panel, positioned on top and bottom of the light panel. LED tubes are pre-installed onto the light panel.
- B** A LED tube element located inside the cable tray. LED tube needs to be installed by the customer.
- C** Two LED tube elements connected with a connector create a double length LED tube, located inside the cable tray. LED tube needs to be installed by the customer.