



Product Specification Sheet

BuzziChandelier US

— By Sas Adriaenssens

An eye-catching lighting solution


Make a statement with your lighting by opting for the BuzziChandelier. A contemporary take on the classic chandelier. The perfect way to add atmosphere to your room with artful shadows and softened sounds. BuzziChandelier is an ideal design statement and acoustical solution for offices, restaurants, hotels, institutions, residences and more.




The Family

Models

BuzziChandelier

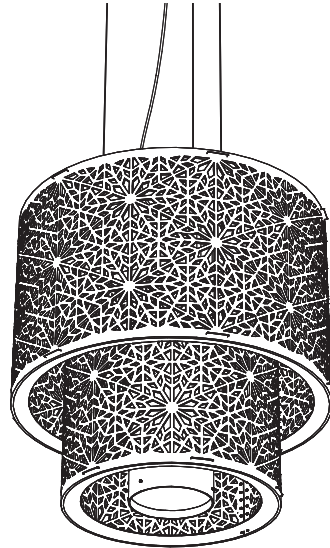

BuzziChandelier Plain

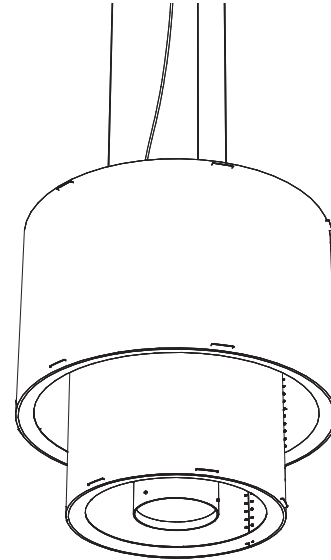

Lighting Units

Retrofit bulb
(bulb excluded)

Required order information

1. Model
2. Color BuzziFelt or Pattern BuzziFelt Printed
3. Mounting Option

Lighting Data

Lighting Units

Retrofit Lighting unit



Retrofit Bulb 2G11 excluded Max 40W CFL or
Max 40W self ballasted LED in compliance with
UL1993

BuzziChandelier | BuzziChandelier Plain



Lighting Unit	Voltage	Wattage	Light Output Luminaire	Efficacy (Lm/W)	CRI	Dimming	Color Temperature	UGR	Standard (stock) On request (> LT)	Color Power Cable	Color Ceiling Canopy	Color Metal Frame	Fabric Collection	Fabric Color	Mounting Option
Retrofit 2G11 bulb excl.	120V	Max. 40 W	-	-	-	-	-	-	Standard	Black	Black	Black	Use color codes below	Use color codes below	3 cables of 78.74" or 196.85" Alu or Black



Product Data

Fixing System

Fixing System Acoustic Panel

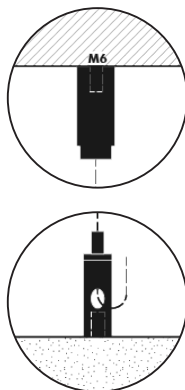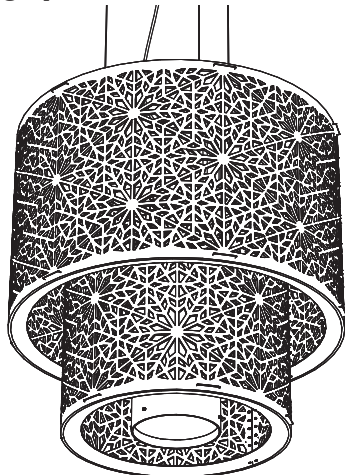

BuzziChandelier is suspended on 3 cables of 78.74" or 196.85" black or alu colored cables, with fixing system screw.

⚠ If installing on suspended ceiling, verify load capacity prior to installation.

Acoustic Shade



The acoustic shade consists of one layer of BuzziFelt with push snaps.

Shade in BuzziFelt or Offwhite BuzziFelt Printed (outside) in Gold, Emperador or Carrara.



Absorption



Diffusion



Mid tone




High tone

Acoustics

BuzziChandelier


Equivalent sound absorption area in m² per object

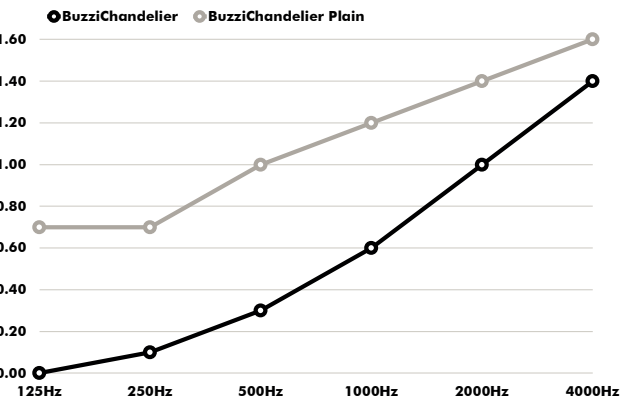

Hz	Aeq/m²	Plain Aeq/m²
125	0,0	0,7
250	0,1	0,7
500	0,3	1
1000	0,6	1,2
2000	1,0	1,4
4000	1,4	1,6

Dimensions


BuzziChandelier

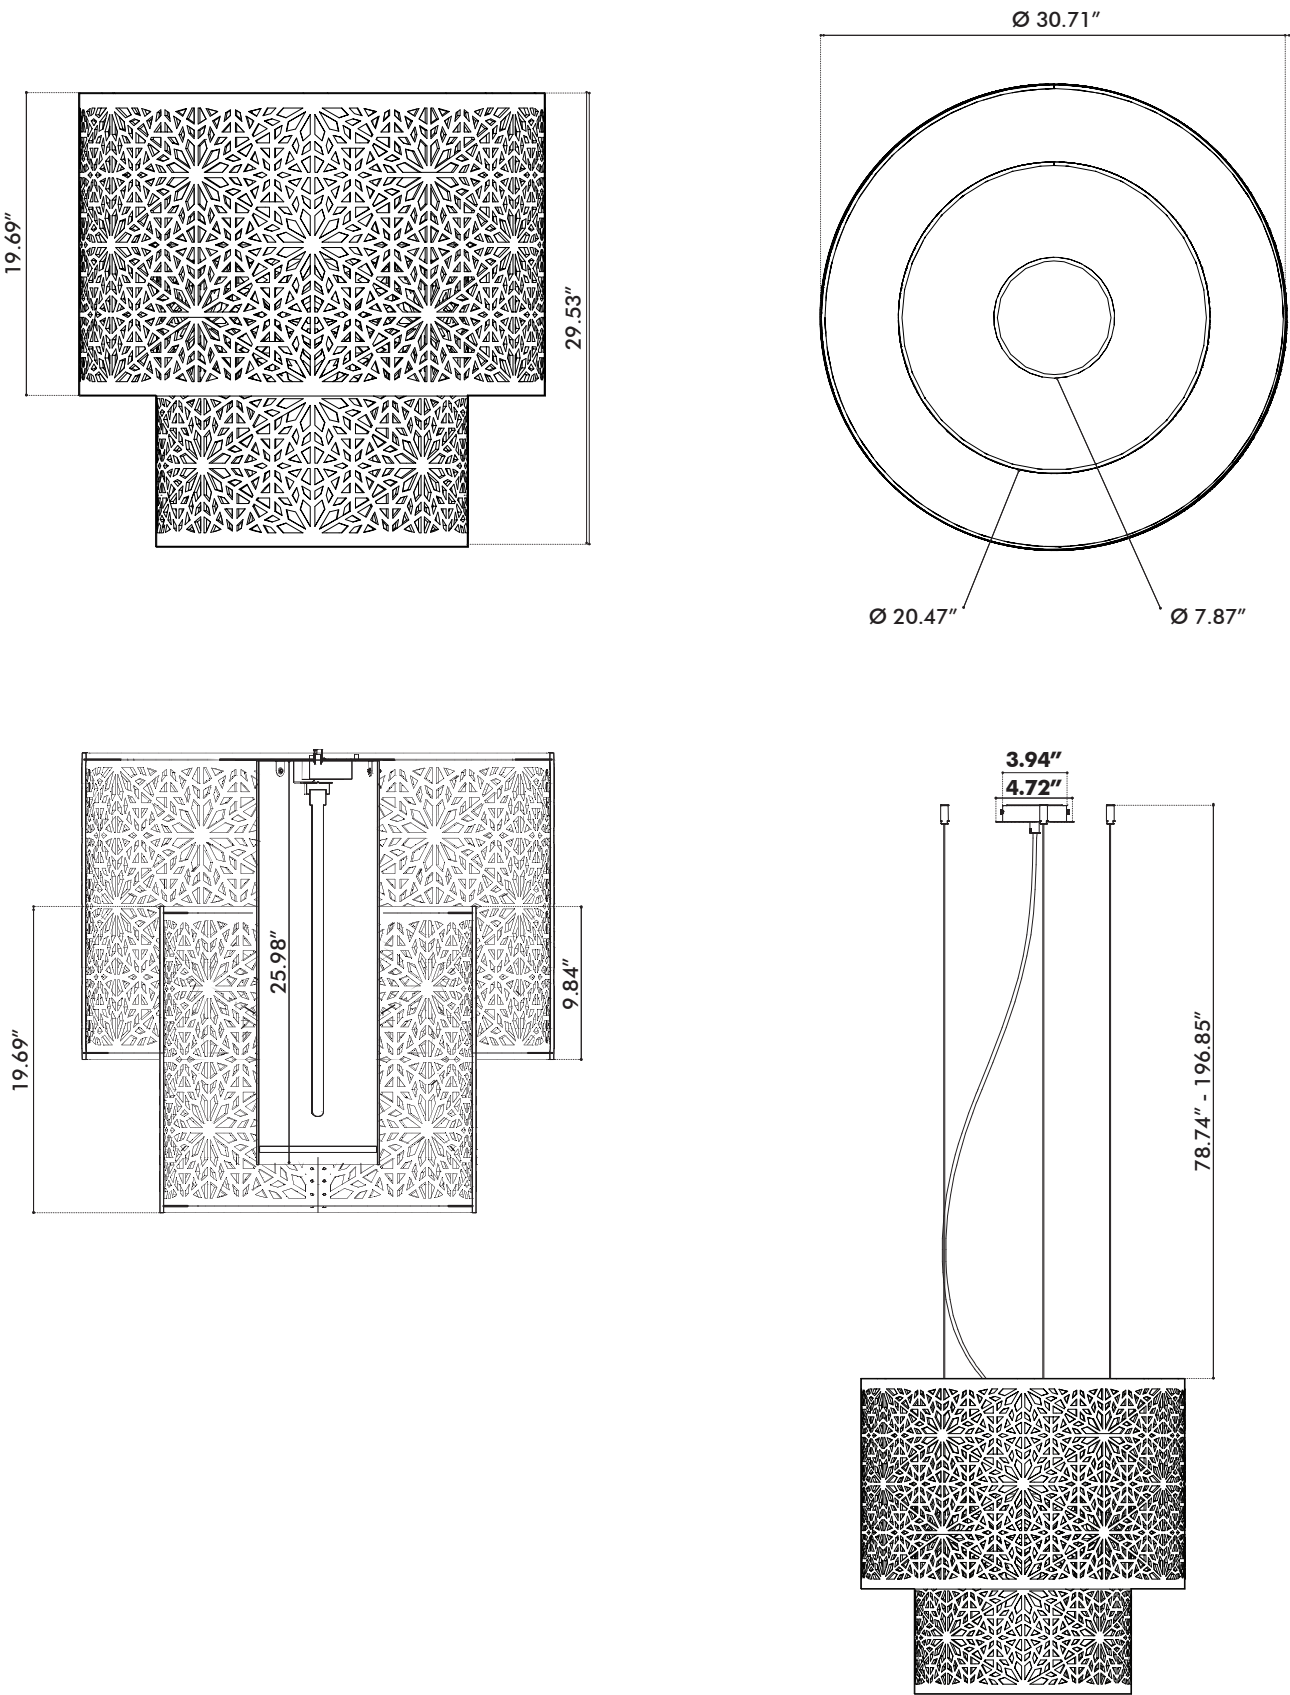

Acoustics

BuzziChandelier


Equivalent sound absorption area in m² per object

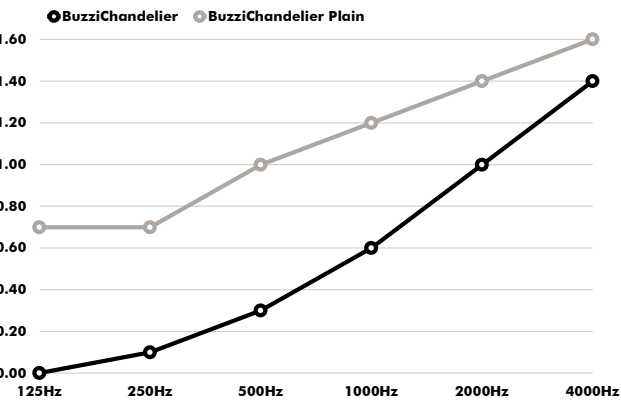

Hz	Aeq/m²	Plain Aeq/m²
125	0,0	0,7
250	0,1	0,7
500	0,3	1
1000	0,6	1,2
2000	1,0	1,4
4000	1,4	1,6

Weights


BuzziChandelier

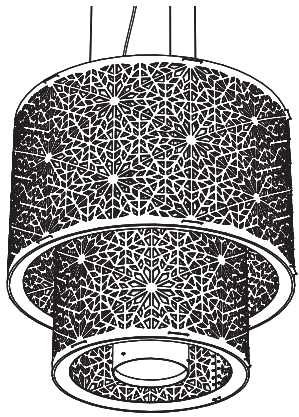

27.56 lbs

Fabrics


Felt (12 colors)



Composition 100% Recycled PE.T. Felt
Weight 1.000 g/m2 | 29.49 oz/yd2
Abrasion resistance >7.000 Martindale
Flammability EU: EN 13501.1+A1/2009
BS476 Part 6 and 7 Class 0
USA: ASTM E84 Class A certified
Fastness to light USA 5




Felt OffWhite Printed



Composition 100% Recycled PE.T. Felt
Weight 1.000 g/m2 | 29.49 oz/yd2
Abrasion resistance >7.000 Martindale
Flammability EU: EN 13501.1+A1/2009
BS476 Part 6 and 7 Class 0
USA: ASTM E84 Class A certified
Fastness to light USA 5



Gold



Emperor



Carrara