
BuzziCube Flat

Product Specification Sheet

This document contains technical information about the BuzziCube Flat Solo, Duo, Trio, Quatro



www.buzzi.space



Sound absorbing pouf

The BuzziCube Flat makes sitting a pleasure for your eyes and your bottom. Upholstered with soft foam and Covered by a variety of BuzziSpace fabrics, it is bound to steal the show in any interior!

Design by BuzziSpace Studio

General

- 🛋 BuzziCube Flat Solo, Duo, Trio, Quatro
- 🌲 Filling: Acoustic Foam
- 🌳 Upholstered in: Fabric, Trevira CS, Reflect, Revive 1, Velvet, Clara 2, Remix 3, Hero 2, Tonus 4, Arda, Memory 2
- ☁ Dry usage
- 🔧 Assembled

Acoustics



Absorption



Diffusion



Low tone



Mid tone



High tone

Certifications



Content

Configurations	3
Components	4
Fabrics	5
Dimensions	8
Acoustics	9

Configurations


BuzziCube Flat

- ◆ Solo | Duo | Trio | Quatro
- ◆ Flat
- ◆ Bottom in antiskid, wood or with wheels (wheels only for Solo)
- ◆ Upholstery in Fabric, Trevira CS, Reflect, Revive 1, Velvet, Clara 2, Remix 3, Hero 2, Tonus 4, Arda, Memory 2


			Antiskid	Wood	Wheels (only for Solo)
✂	Solo:	L 46 cm	W 46 cm	H 47 cm	H 50 cm
		L 18.11"	W 18.11"	H 18.50"	H 19.69"
	Duo:	L 92 cm	W 46 cm	H 47 cm	H 50 cm
		L 36.22"	W 18.11"	H 18.50"	H 19.69"
	Trio:	L 138 cm	W 46 cm	H 47 cm	H 50 cm
		L 54.33"	W 18.11"	H 18.50"	H 19.69"
	Quatro:	L 184 cm	W 46 cm	H 47 cm	H 50 cm
		L 72.44"	W 18.11"	H 18.50"	H 19.69"

		Antiskid	Wood	Wheels (only for Solo)
⚖	Solo:	4 kg	6 kg	6 kg
		8.82 lbs	13.23 lbs	13.23 lbs
	Duo:	7,5 kg	11,5 kg	
		16.53 lbs	25.35 lbs	
	Trio:	10,8 kg	17,5 kg	
		23.81 lbs	38.58 lbs	
	Quatro:	14,5 kg	22,6 kg	
		31.97 lbs	49.82 lbs	


Solo




Duo



Trio




Quatro

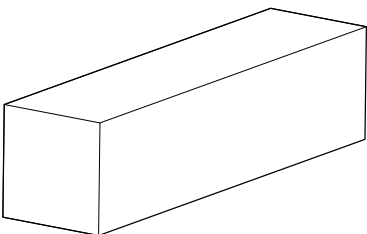

Components


Bottom

Antiskid




Bottom:
Antiskid

Wood

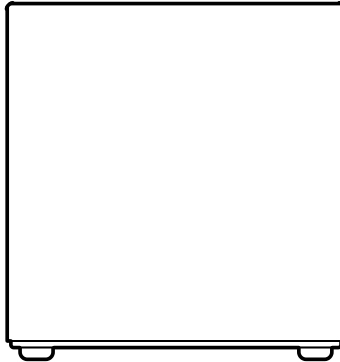


Bottom:
Black MDF
4 Plastic Feet

Wheels (only for Solo)

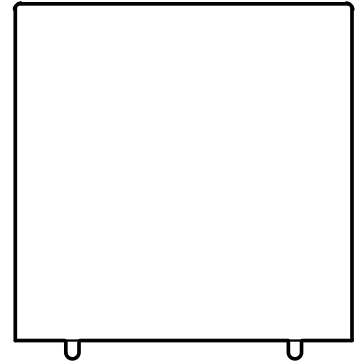


Bottom:
Poplar multiplex
MDF covered with antiskid
4 Wheels
(load capacity: 40 kg | 88.18 lbs
per wheel)

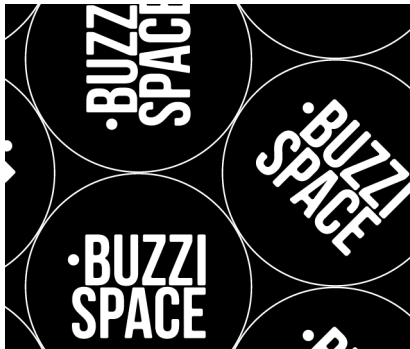

Fabrics

Fabric (45 colors)



Category A

Composition 70% Recycled Wool, 25% Recycled Polyacryl,
5% Recycled Other Fabrics

Weight 405 g/m² | 11.94 oz/yd²

Abrasion resistance 40.000 Martindale, 50,000 Wyzenbeek

Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette).
EN 1021.2/2006 | BS EN 1021.2/2006 (match)
USA: CAL TB 117 | ASTM E84 CLASS A


Fastness to light EU: 4 | USA 4

Fastness to rubbing EU: Wet 3-4 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Trevira CS (47 colors)



Category A

Weight 420 g/m² | 12.39 oz/yd²

Composition 100% Polyester, Trevira CS

Abrasion resistance 100.000 Martindale, 90,000 Wyzenbeek

Flammability BS 5852 part II: CRIB 5 | BS 7176 Medium Hazard
USA: CAL TB 117 | M1 | B1 | EN 1021/1-2 | C1 |
IMO Res. A652 (16)


Fastness to light EU: 6 | USA 5

Fastness to rubbing EU: Wet 4-5 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Reflect (34 colors)



Category A

Weight 430 g/m² | 13.78 oz/yd²

Composition 100% Post-consumer recycled polyester

Abrasion resistance 100.000 Martindale

Flammability AS/NZS 3837 class 1 | ASTM E84 Class A Unadhered
ASTM E84 Class B Adhered | BS 5852 crib 5 with treatment
BS 5852 part 1 with treatment | EN 1021-1/2 | US Cal. Bull. 117-2013

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing EU: Wet 5-5 | Dry 5-5


Pilling Note 4, EN ISO 12945



kvadrat

Revive 1 (25 colors)

kvadrat



Category A

Composition 100% recycled polyester FR

Weight 430 g/lin.m

Abrasion resistance 60.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1

UNI 9175 1IM | US Cal. Tech. Bull. 117

IMO A.652 (16)


Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 5, wet 4-5

Pilling Note 4-5, EN ISO 12945



Velvet (12 colors)



Category B

Composition 100% PES

Weight 375 g/m² | 11.06 oz/yd²

Abrasion resistance > 100.000 Martindale


Fastness to light EU: 4-5

Fastness to rubbing EU: Wet 4 | Dry 4-5

Pilling EU: 4-5

Clara 2 (24 colors)

kvadrat



Category B

Composition 92% new wool, 8% nylon

Weight 400 g/lin.m

Abrasion resistance 80.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852, ignition source 2-3 | DIN 4102 B2

NF D 60 013 | UNI 9175 1IM | US Cal. Tech. Bull. 117, Sec. E

NFPA 260 | IMO A.652(16)

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 4, EN ISO 12945



Remix 3 (73 colors)

kvadrat



Category B

Composition 90% new wool, 10% nylon

Weight 415 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1

Önorm B1/Q1 | NF D 60 013 | UNI 9175, 1IM

AS/NZS 1530.3 | Cal. Tech. Bull. 117-2013

NFPA 260 | IMO FTP Code 2010:Part 8

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 4, EN ISO 12945



Hero 2 (33 colors)

kvadrat



Category C

Composition 97% new wool, 3% nylon

Weight 580 g/lin.m

Abrasion resistance 45.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B2 | NF D 60 013

UNI 9175 1IM | US Cal. Bull. 117-2013 | NFPA 260

IMO A.652 (16)

Fastness to light Note 5-6, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4-5

Pilling Note 3-4, EN ISO 12945



Tonus 4 (47 colors)

kvadrat



Category D

Composition 90% new wool, 10% Helanca

Weight 665 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1 | DIN 4102 B2

Önorm B1/Q1 | NF D 60 013 | UNI 9175 1IM

US Cal. Bull. 117-2013 | NFPA 260 | IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 3-5, wet 3-5

Pilling Note 3, EN ISO 12945



Arda (12 colors)

kvadrat



Category E

Composition 70% new wool 21% polyester 9% nylon

Weight 800 g/lin. m | 25.8 oz/ly

Abrasion resistance

Approx. 50.000 Martindale rubs, EN ISO 12947

Flammability ASTM E84 Class A Unadhered | AS/NZS 3837 class 2 | BS 5852 part 1
BS 5852 crib 5 | DIN 4102 B2 | EN 1021-1/2 | IMO FTP Code 2010 Part 8
UNI 9175 1IM | US Cal. Bull. 117-2013

Fastness to light Note 5-8, ISO 105-B02


Fastness to rubbing Dry note 3-5 ISO 105-X12
Wet note 3-5 ISO 105-X12

Pilling Note 4, EN ISO 12945



Memory 2 (20 colors)

kvadrat



Category E

Composition 100% Trevira CS

Weight 700 g/lin.m

Abrasion resistance

35.000 rubs acc. to the Martindale method, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1
NF D 60 013 | NF P 92 507 M1 | UNI 9175 1IM
UNI 9177 classe 1 | US Cal. Tech. Bull. 117
IMO A.652 (16)

Fastness to light Note 5-8, ISO 105-B02


Fastness to rubbing (ISO) dry 4-5, wet 4-5

Pilling Note 4, EN ISO 12945




Dimensions


Solo




Duo




Trio

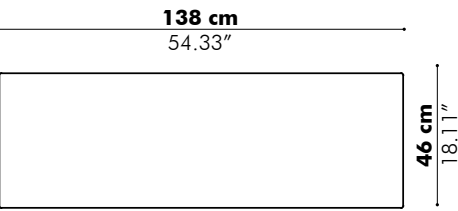


Quattro

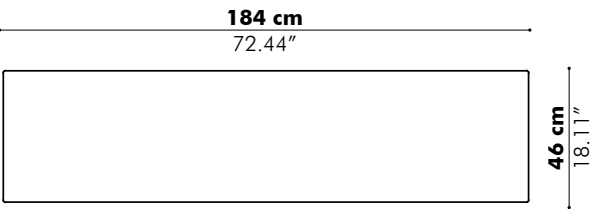


Antiskid



Wood




Wheels



Acoustics

BuzziCube Flat

Equivalent sound absorption area in m² per object

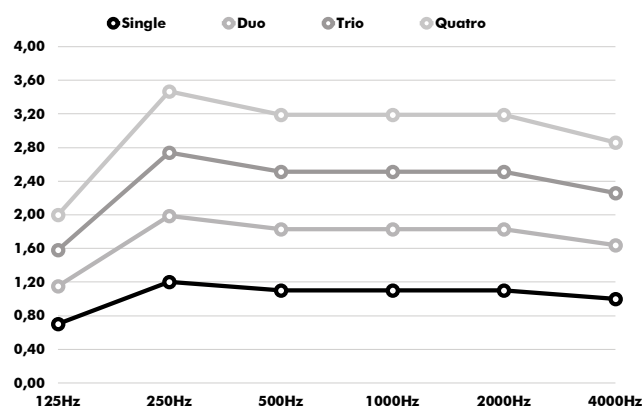

Hz	Solo Aeq/m²	Duo Aeq/m²	Trio Aeq/m²	Quatro Aeq/m²
125	0.70	1.15	1.58	2.00
250	1.20	1.99	2.74	3.47
500	1.10	1.83	2.51	3.19
1000	1.10	1.83	2.51	3.19
2000	1.10	1.83	2.51	3.19
4000	1.00	1.64	2.26	2.86