



Product Specification Sheet

BuzziSurf US










— By BuzziSpace Studio

An acoustic sanctuary

BuzziSurf is a height-adjustable acoustic lighting solution that can adapt to different zoning areas and spaces with low ceilings. Crafted from a plush, upholstered honeycomb and foam body, BuzziSurf helps to absorb excessive noise in any interior. For even more design freedom, adjust the height of the lighting fixture and BuzziSurf (Medium and Large only) separately for a unique and dynamic look.



The Family

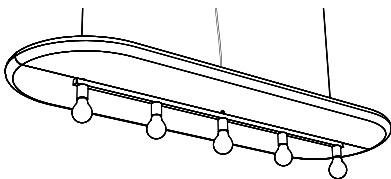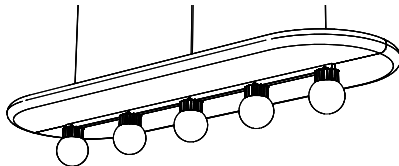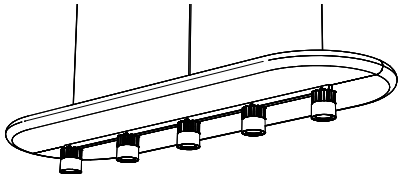		Models		
Lighting Units	Retrofit E26 (Bulb excluded)	BuzziSurf Small	BuzziSurf Medium	BuzziSurf Large
				
	LED Solo Globe			
	LED Solo Spot			
	LED Trio Globe			
	LED Trio Spot			
	LED Quintet Globe			
	LED Quintet Spot			

Required order information

1. Size
2. Light Option
3. Fabric (CAT -> Collection -> Color)
4. Mounting Option

Lighting Data

Lighting Units

Retrofit Lighting unit



The Surf Small retrofit includes 1 x E26 fitting.
BuzziSurf Medium retrofit includes 3 x E26 fitting.
BuzziSurf Large retrofit includes 5 x E26 fitting.
Bulb excluded, Max. 100W

LED Globe



The LED fixtures consists of 1,3 or 5 powder-coated black heatsinks with LED chip on board (COB) light source(s).
The product can be finished with a frosted glass globe diffuser which spreads the light in a large beam angle of 170°, enlighting the surroundings or a reflector spot adaptor directing the light with a beam angle of 38° downwards.

LED Spot



BuzziSurf

Model: Small

Lighting Options

Characteristics

Mounting

Lighting Unit	Voltage Input	Technical	Visual	Options
Retrofit Solo	110-120V	Wattage: Max. 100W	Color: Power Cable: Black Ceiling Canopy: Black	2 cables of 78.74" or 196.85" Alu or Black

Lighting Options

Characteristics

Mounting

Lighting Unit	Voltage Input	Color Temperature	UGR (Diffuser type)	Dimming	Technical	Visual	Options
LED Solo	100-240V/277V	3000K	23 (Globe)	1-10V DALI	Power consumption: 20W Light output: 1500 Lm Efficacy: 75 Lm/W CRI: > 90	Color: Power Cable: Black Ceiling Canopy: Black	2 cables of 78.74" or 196.85" Alu or Black
			12 (Spot)	1-10V DALI	Power consumption: 20W Light output: 1500 Lm Efficacy: 75 Lm/W CRI: >w 90		

Model: Medium

Lighting Options

Characteristics

Mounting

Lighting Unit	Voltage Input	Technical	Visual	Options
Retrofit Trio	110-120V	Wattage: 3 x Max. 100W	Color: Power Cable: Black Ceiling Canopy: Black	2 cables of 78.74" or 196.85" Alu or Black

Lighting Options

Characteristics

Mounting

Lighting Unit	Voltage Input	Color Temperature	UGR (Diffuser type)	Dimming	Technical	Visual	Options
LED Trio	100-240V/277V	3000K	23 (Globe)	1-10V	Power consumption: 51W Light output: 3 x1500 Lm Efficacy: 88 Lm/W CRI: > 90	Color: Power Cable: Black Ceiling Canopy: Black	2 cables of 78.74" or 196.85" Alu or Black
			12 (Spot)	1-10V	Power consumption: 51W Light output: 3 x1500 Lm Efficacy: 88 Lm/W CRI: > 90		

Model: Large

Lighting Options

Characteristics

Mounting

Lighting Unit	Voltage Input	Technical	Visual	Options
Retrofit Quintet	110-120V	Wattage: 5 x Max. 100W	Color: Power Cable: Black Ceiling Canopy: Black	1 cable of 78.74" or 196.85" Alu or Black

Lighting Options

Characteristics

Mounting


Lighting Unit	Voltage Input	Color Temperature	UGR (Diffuser type)	Dimming	Technical	Visual	Options
LED Quintet	100-240V/277V	3000K	23 (Globe)	1-10V	Power consumption: 89W Light output: 5 x 1500 Lm Efficacy: 84 Lm/W CRI: > 90	Color: Power Cable: Black Ceiling Canopy: Black	1 cable of 78.74" or 196.85" Alu or Black
			12 (Spot)	1-10V	Power consumption: 89W Light output: 5 x 1500 Lm Efficacy: 84 Lm/W CRI: > 90		




Photometric Data

BuzziSurf Small LED Solo


LED Solo Globe Cartesian diagram




LED Solo Globe Polar curve

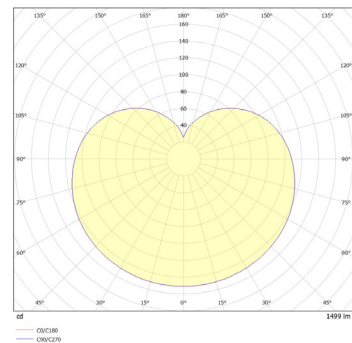

LED Solo Spot Cartesian diagram




LED Solo Spot Polar curve

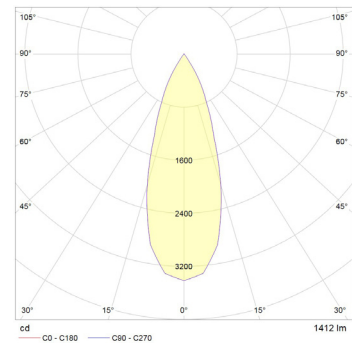


BuzziSurf Medium LED Trio


LED Trio Globe Cartesian diagram




LED Trio Globe Polar curve

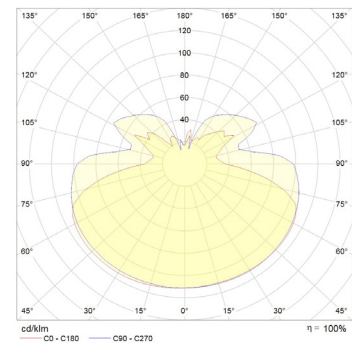

LED Trio Spot Cartesian diagram




LED Trio Spot Polar curve

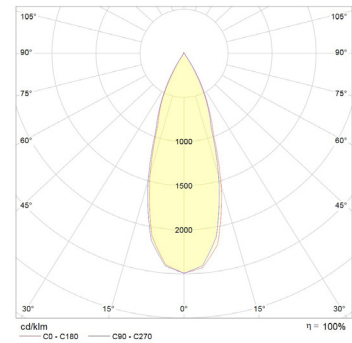


BuzziSurfa Large LED Quintet


LED Quintet Globe Cartesian diagram

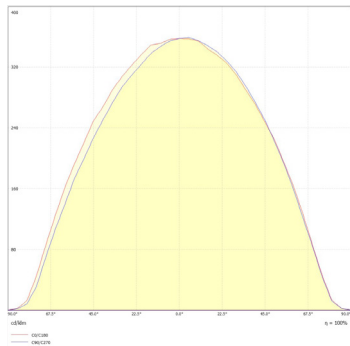


LED Quintet Globe Polar curve



LED Quintet Spot Cartesian diagram

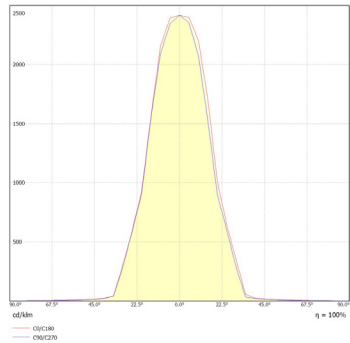

LED Quintet Spot Polar curve




Tips and Tricks - Light Options

To enlight your workplace with optimal lux levels take following measurements into account:

BuzziSurf Small BuzziSol Solo


Solo Spot

Office,
Meeting room



Solo Globe


Office,
Meeting room



BuzziSurf Medium BuzziSol Trio


Trio Spot

Office,
Meeting room



Trio Globe


Office,
Meeting room



BuzziSurf Large BuzziSol Quintet


Quintet Spot

Office
Meeting room



Quintet Globe

Office,
Meeting room






* According to EN12464

Product Data




Fixing System

Fixing System Acoustic Panel

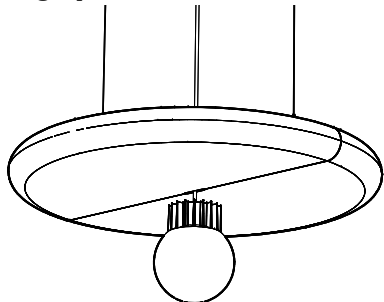

BuzziSurf Small is suspended on 2 cables of 78.74" or 196.85", black or alu colored, with fixing screw.

Fixing System Lighting

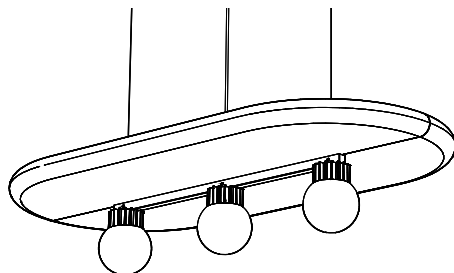

The light elements of BuzziSurf Medium and BuzziSurf Large are suspended independently from the acoustic panel with 2 cables of 78.74" or 196.85", black or alu colored, with fixing system screw

⚠ If installing on suspended ceiling, verify load capacity prior to installation.

Acoustic Panel



The acoustic panel is upholstered front to back in a chosen fabric.



Absorption



Diffusion



Low tone




Mid tone





High tone

Dimensions




BuzziSurf Small Retrofit

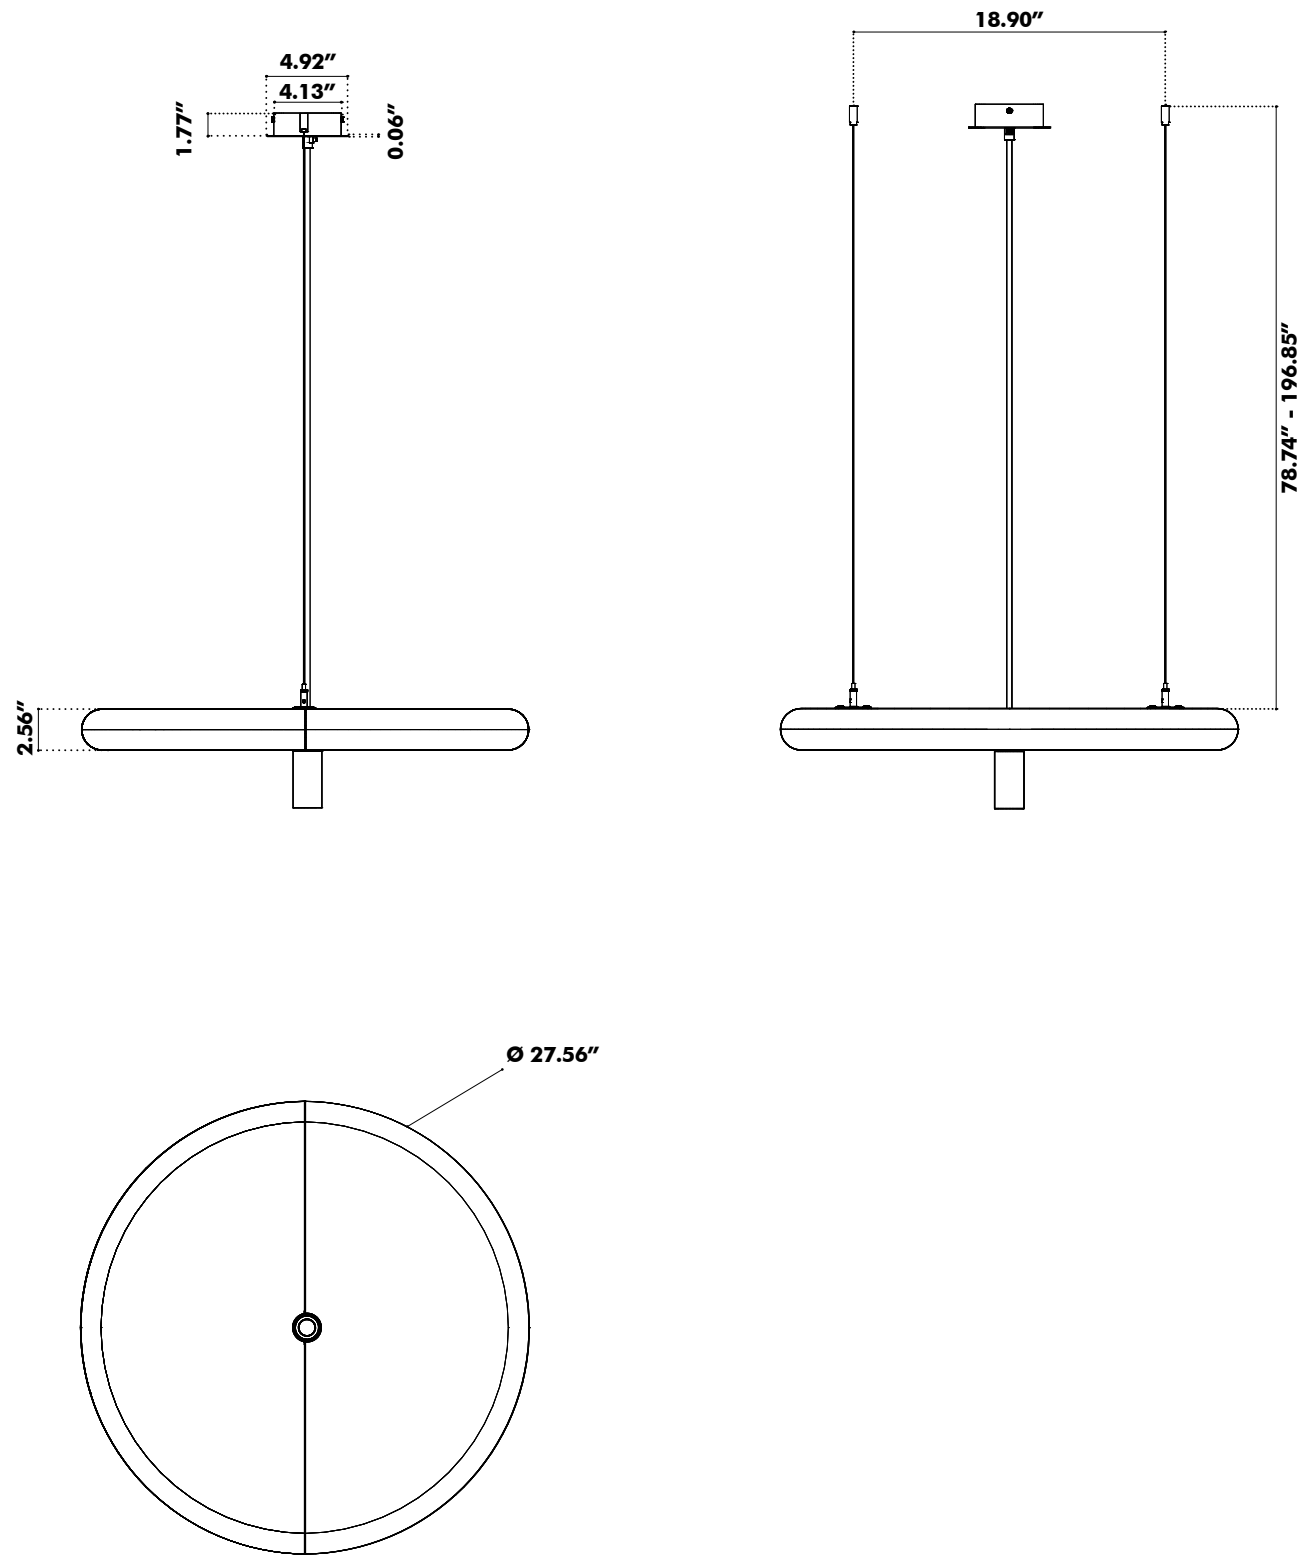


BuzziSurf Small LED

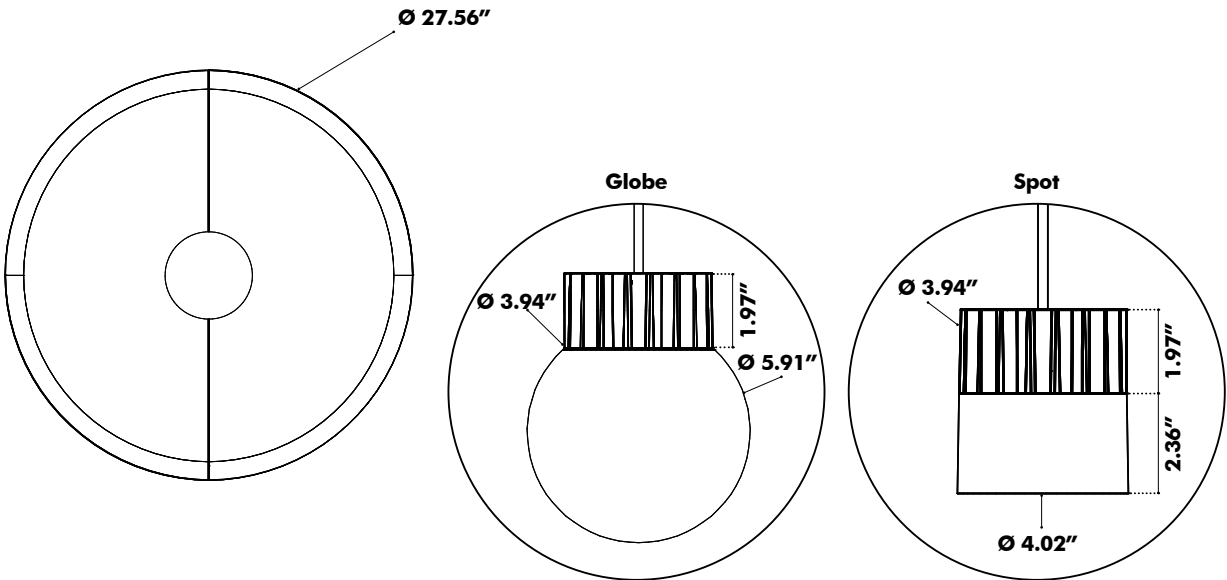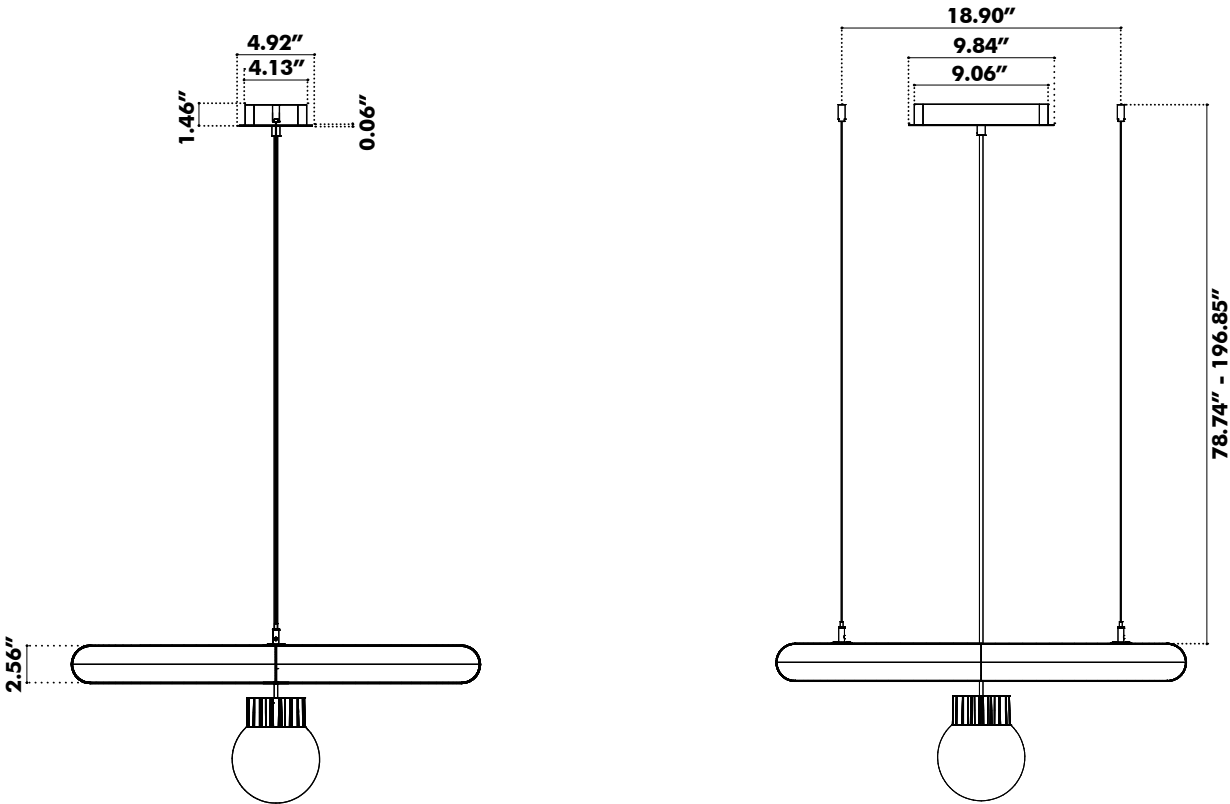


BuzziSurf Medium Retrofit

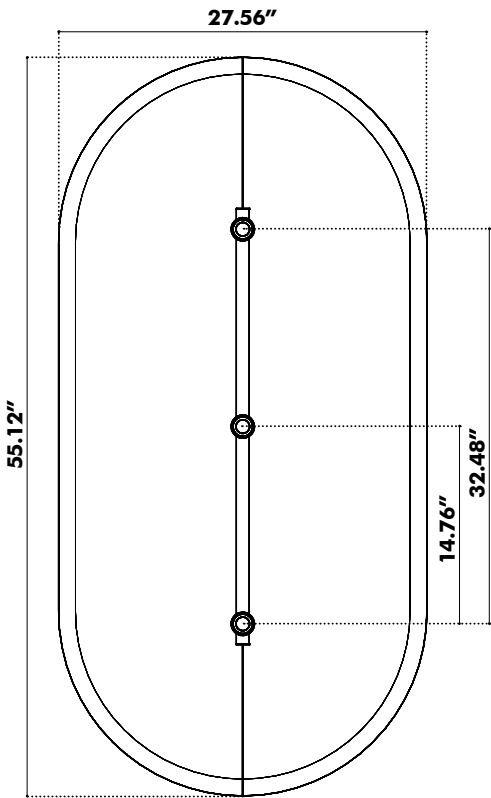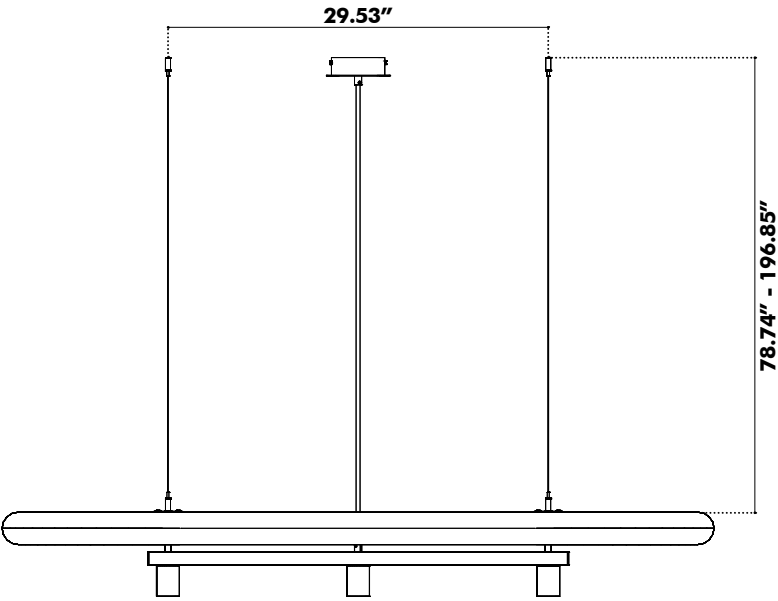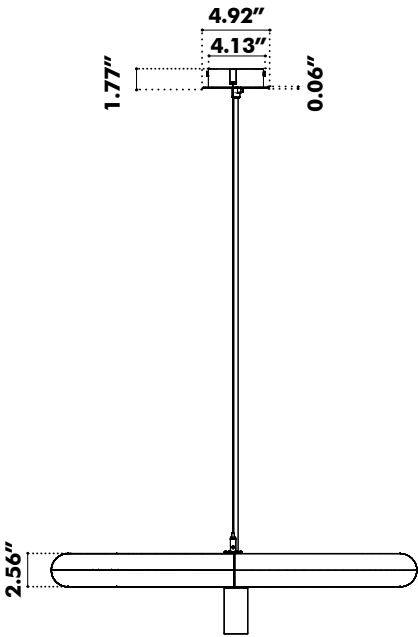


BuzziSurf Medium LED

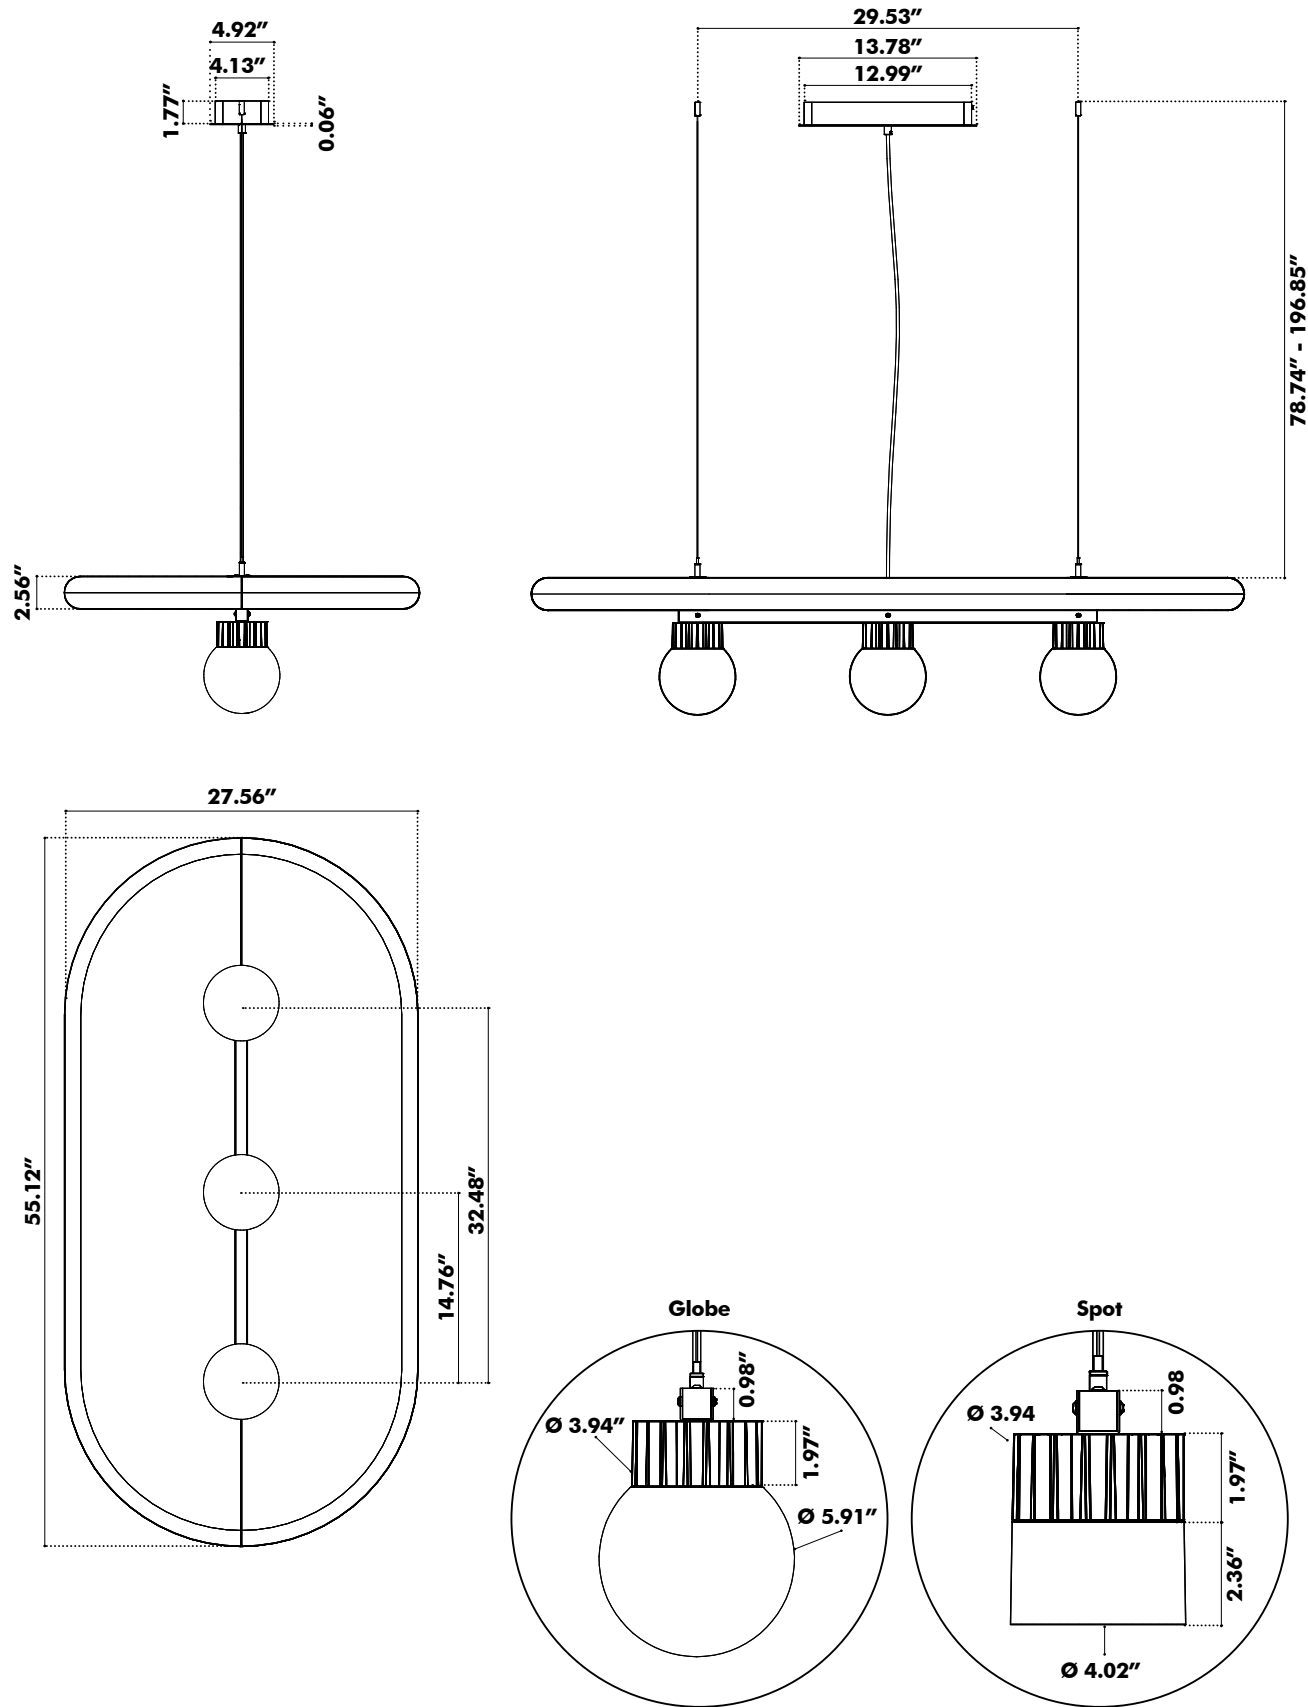

BuzziSurf Large Retrofit

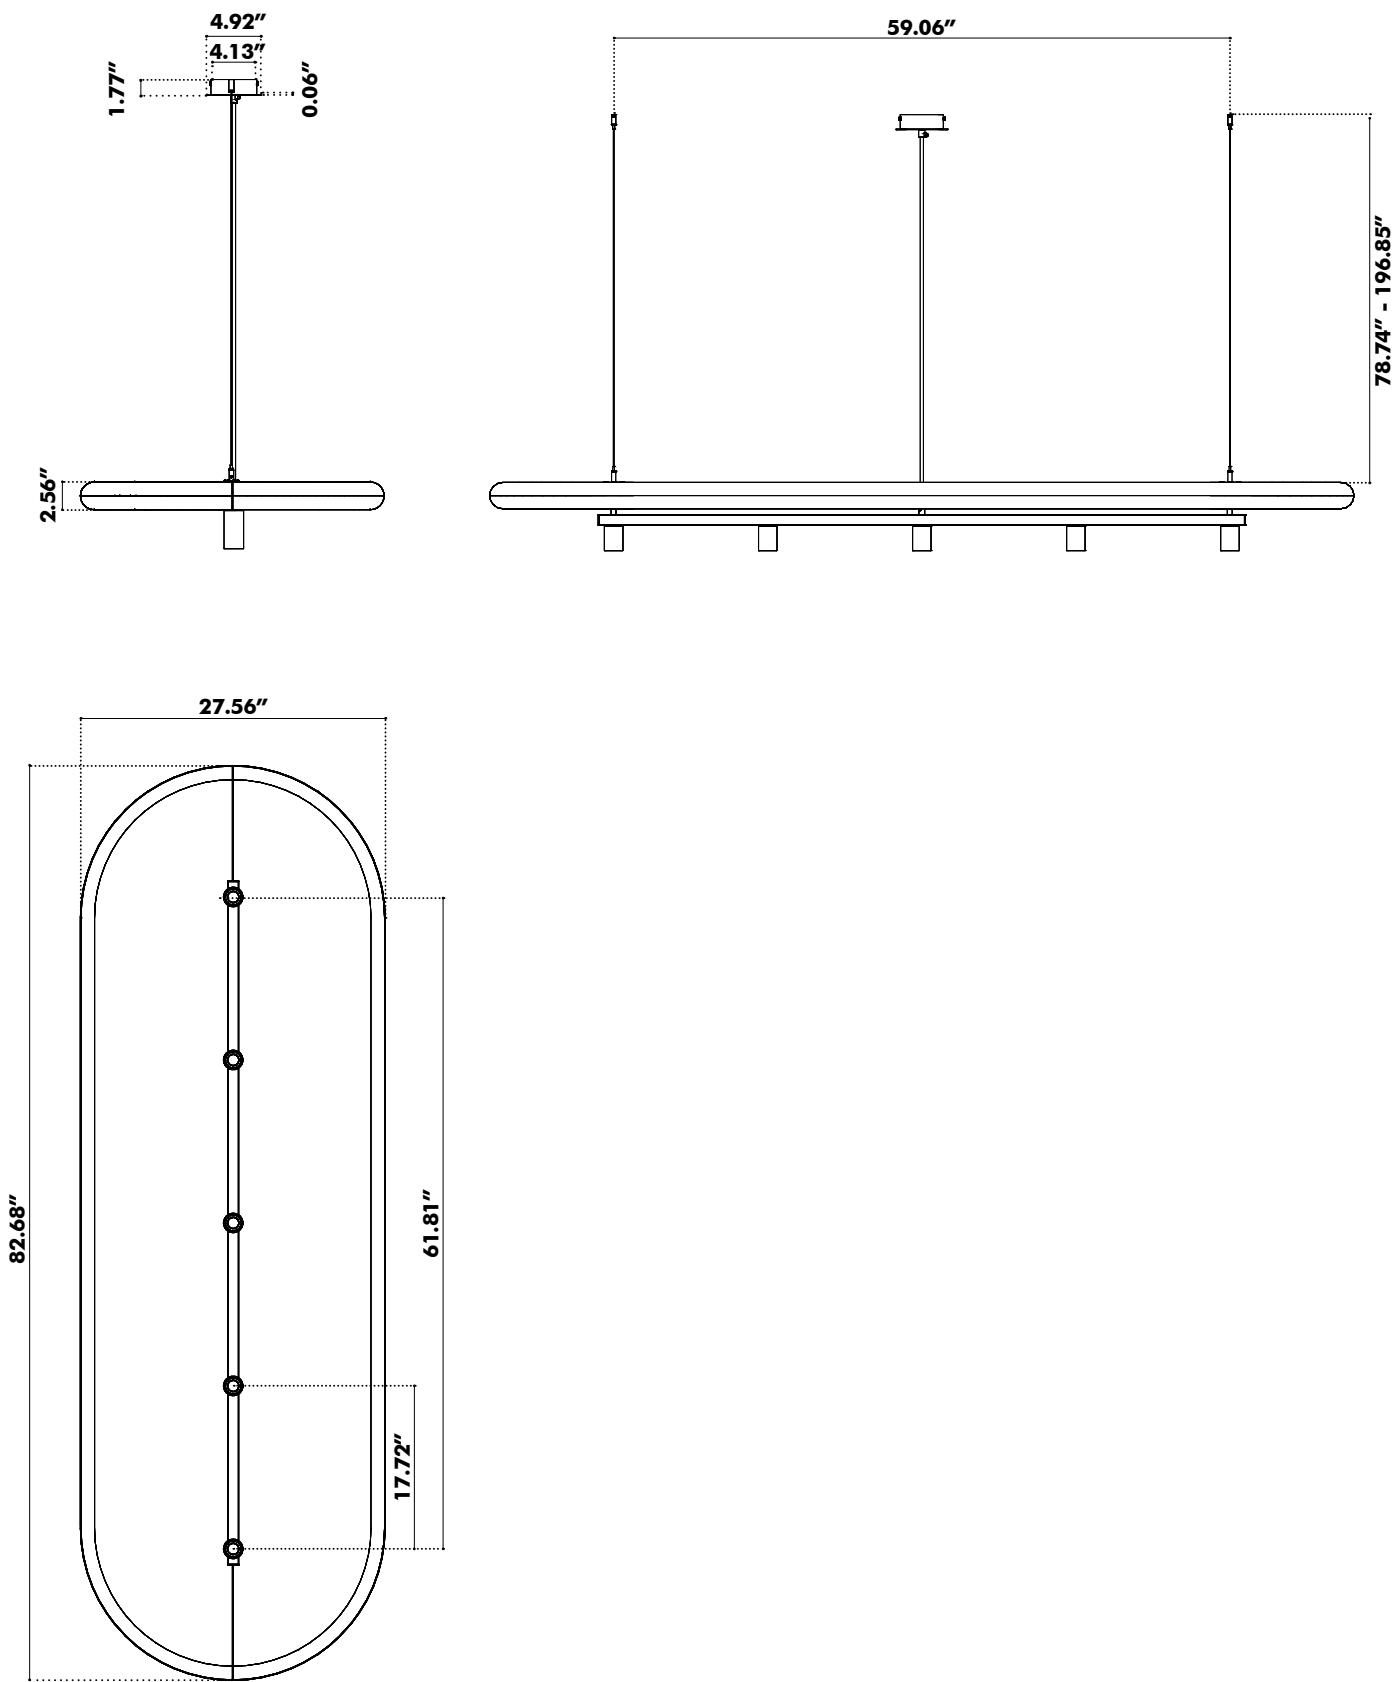


BuzziSurf Large LED

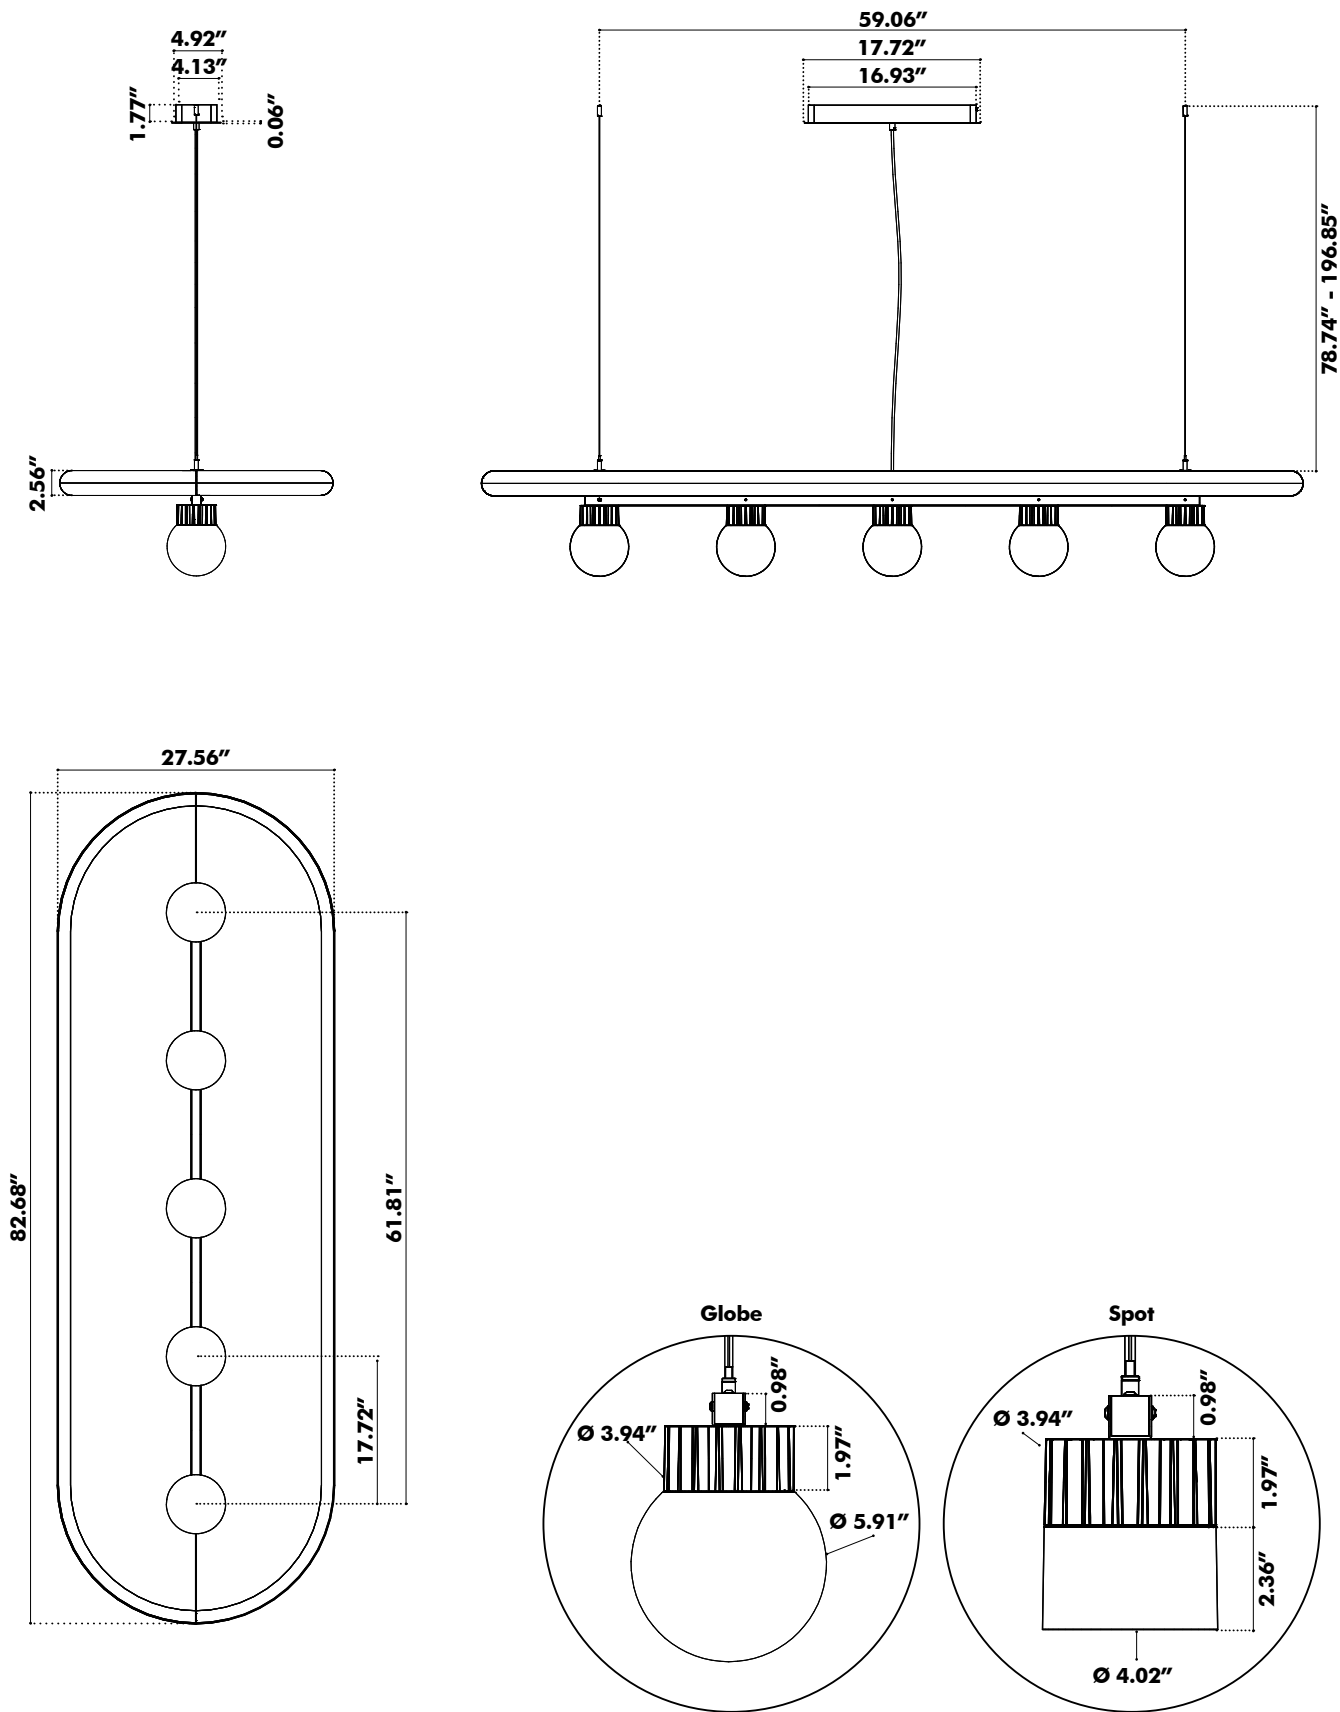


Weights

BuzziSurf Small Retro




8.38 lbs

BuzziSurf Small LED




10.58 lbs

BuzziSurf Medium Retrofit

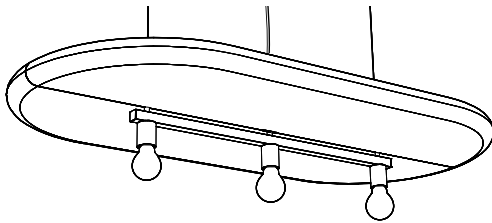


20.94 lbs

BuzziSurf Medium LED

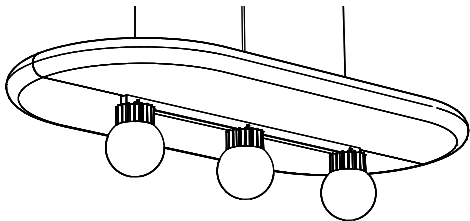


23.15 lbs

BuzziSurf Large Retrofit

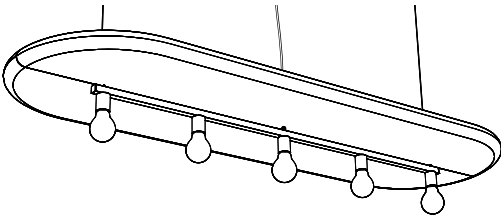

33.51 lbs


BuzziSurf Large LED

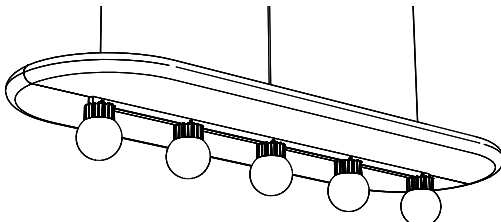

35.71 lbs

Fabrics

Fabric (45 colors)



Category A

Composition 70% Recycled Wool, 25% Recycled Polyacryl,
5% Recycled Other Fabrics

Weight 405 g/m² | 11.94 oz/yd²

Abrasion resistance 40.000 Martindale, 50,000 Wyzenbeek

Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette).
EN 1021.2/2006 | BS EN 1021.2/2006 (match)
USA: CAL TB 117 | ASTM E84 CLASS A


Fastness to light EU: 4 | USA 4

Fastness to rubbing EU: Wet 3-4 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Trevira CS (47 colors)



Category A

Weight 420 g/m² | 12.39 oz/yd²

Composition 100% Polyester, Trevira CS

Abrasion resistance 100.000 Martindale, 90,000 Wyzenbeek

Flammability BS 5852 part II: CRIB 5 | BS 7176 Medium Hazard
USA: CAL TB 117 | M1 | B1 | EN 1021/1-2 | C1 |
IMO Res. A652 (16)


Fastness to light EU: 6 | USA 5

Fastness to rubbing EU: Wet 4-5 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Reflect (34 colors)



Category A

Weight 430 g/m² | 13.78 oz/yd²

Composition 100% Post-consumer recycled polyester

Abrasion resistance 100.000 Martindale

Flammability AS/NZS 3837 class 1 | ASTM E84 Class A Unadhered
ASTM E84 Class B Adhered | BS 5852 crib 5 with treatment

BS 5852 part 1 with treatment | EN 1021-1/2 | US Cal. Bull. 117-2013

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing EU: Wet 5-5 | Dry 5-5


Pilling Note 4, EN ISO 12945



kvadrat

Revive 1 (25 colors)

kvadrat



Category A

Composition 100% recycled polyester FR

Weight 430 g/lin.m

Abrasion resistance 60.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1

UNI 9175 1IM | US Cal. Tech. Bull. 117

IMO A.652 (16)


Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 5, wet 4-5

Pilling Note 4-5, EN ISO 12945



Velvet (12 colors)



Category B

Composition 100% PES

Weight 375 g/m² | 11.06 oz/yd²

Abrasion resistance > 100.000 Martindale


Fastness to light EU: 4-5

Fastness to rubbing EU: Wet 4 | Dry 4-5

Pilling EU: 4-5

Clara 2 (24 colors)

kvadrat



Category B

Composition 92% new wool, 8% nylon

Weight 400 g/lin.m

Abrasion resistance 80.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852, ignition source 2-3 | DIN 4102 B2

NF D 60 013 | UNI 9175 1IM | US Cal. Tech. Bull. 117, Sec. E

NFPA 260 | IMO A.652(16)

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 4, EN ISO 12945



Remix 3 (73 colors)

kvadrat



Category B

Composition 90% new wool, 10% nylon

Weight 415 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1

Önorm B1/Q1 | NF D 60 013 | UNI 9175, 1IM

AS/NZS 1530.3 | Cal. Tech. Bull. 117-2013

NFPA 260 | IMO FTP Code 2010:Part 8

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 4, EN ISO 12945



Hero 2 (33 colors)

kvadrat



Category C

Composition 97% new wool, 3% nylon

Weight 580 g/lin.m

Abrasion resistance 45.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B2 | NF D 60 013

UNI 9175 1IM | US Cal. Bull. 117-2013 | NFPA 260

IMO A.652 (16)

Fastness to light Note 5-6, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4-5

Pilling Note 3-4, EN ISO 12945



Tonus 4 (47 colors)

kvadrat



Category D

Composition 90% new wool, 10% Helanca

Weight 665 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1 | DIN 4102 B2

Önorm B1/Q1 | NF D 60 013 | UNI 9175 1IM

US Cal. Bull. 117-2013 | NFPA 260 | IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 3-5, wet 3-5

Pilling Note 3, EN ISO 12945



Arda (12 colors)

kvadrat



Category E

Composition 70% new wool 21% polyester 9% nylon

Weight 800 g/lin. m | 25.8 oz/ly

Abrasion resistance

Approx. 50.000 Martindale rubs, EN ISO 12947

Flammability ASTM E84 Class A Unadhered | AS/NZS 3837 class 2 | BS 5852 part 1

BS 5852 crib 5 | DIN 4102 B2 | EN 1021-1/2 | IMO FTP Code 2010 Part 8

UNI 9175 1IM | US Cal. Bull. 117-2013

Fastness to light Note 5-8, ISO 105-B02

Fastness to rubbing Dry note 3-5 ISO 105-X12


Wet note 3-5 ISO 105-X12

Pilling Note 4, EN ISO 12945



Memory 2 (20 colors)

kvadrat




Category E
Composition 100% Trevira CS
Weight 700 g/lin.m
Abrasion resistance
35.000 rubs acc. to the Martindale method, EN ISO 12947
Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1
NF D 60 013 | NF P 92 507 M1 | UNI 9175 1IM
UNI 9177 classe 1 | US Cal. Tech. Bull. 117
IMO A.652 (16)
Fastness to light Note 5-8, ISO 105-B02
Fastness to rubbing (ISO) dry 4-5, wet 4-5
Pilling Note 4, EN ISO 12945



Acoustics

BuzziSurf Ceiling

Equivalent sound absorption area in m² per object

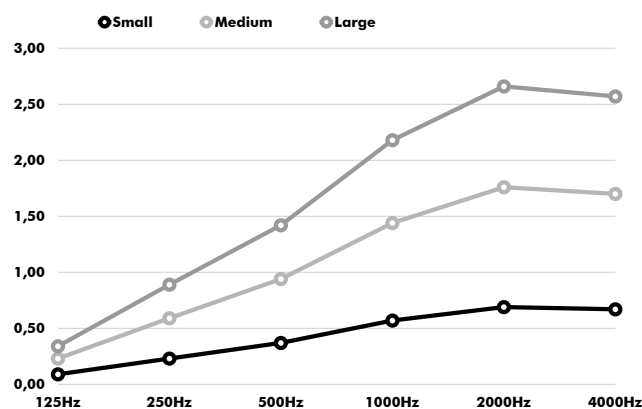

Hz	Small Aeq/m²	Medium Aeq/m²	Large Aeq/m²
125	0.09	0.23	0.34
250	0.23	0.59	0.89
500	0.37	0.94	1.42
1000	0.57	1.44	2.18
2000	0.69	1.76	2.66
4000	0.67	1.70	2.57