
BuzziTube

Product Specification Sheet

This document contains technical
information about the BuzziTube



www.buzzi.space

Create different atmospheres

BuzziTube's voluminous geometric design finds a perfect balance between a suspended acoustic ceiling panel and a work of art. Due to its 3-dimensional, yet soft and delicate look, BuzziTube instantly elevates any modern residential or commercial space while absorbing excessive noise.

The acoustic solution can be used as a standalone or combined with our BuzziJet family or any pre-existing lighting units to create a dynamic touch in any open space. BuzziTube arrives in seven different models and can be upholstered in a wide range of fabrics and colors, making it easy to suit your needs. Additionally, the cable is colored in either a discreet black or alu, so it will not overpower any pre-existing design.

Design by BuzziSpace Studio

General



Ceiling Suspended

S | M | L | XL | XXL | 3XL | 4XL



Upholstered acoustic foam element

Powder coated metal frame in white (RAL 9010)

Cover: Fabric, Trevira CS, Revive 1, Clara 2, Remix 3, Hero 2, Tonus 4, Arda, Memory 2



Dry Use



Assembled



Ceiling Suspended Straight or Split (only available for BuzziTube S | M)



If installing on suspended ceiling, verify load capacity prior to installation.

Certifications



PEFC™ PEFC/07-32-385

Acoustics



Absorption



Diffusion



Low Tone



Mid Tone




High Tone

Content

Configurations	3
Mounting	5
Fabrics	6
Dimensions	9
Acoustics	13

Configuration

BuzziTube S

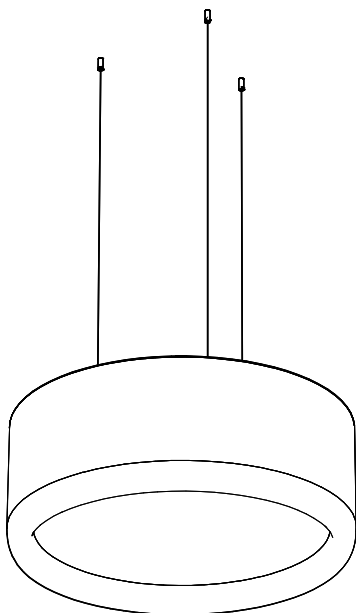

🔑 Ceiling Suspended

Upholstered acoustic foam element
Powder coated metal frame in white (RAL 9010)
🌲 Cover: Fabric, Trevira CS+ | CS, Revive 1, Clara 2, Remix 3, Hero 2, Tonus 4, Memory 2


✂ Ø 80 cm H: 22,5 cm
Ø 31.50" H: 8.86"

⚖ 5,7 kg | 12.57 lbs

⋮ Ceiling Suspended Straight or Split
3x black or alu cables 2 or 5 m | 78.74" or 196.85"

⚠ If installing on suspended ceiling, verify load capacity prior to installation.

BuzziTube M

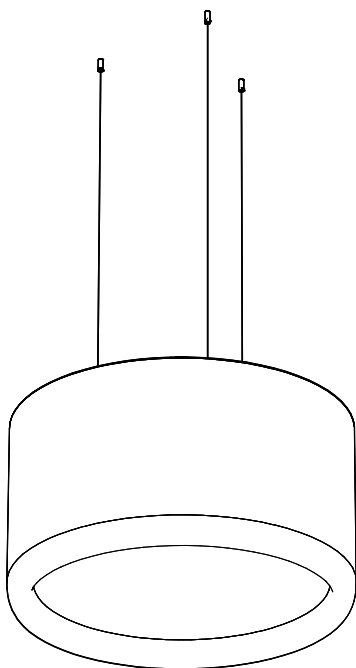

🔑 Ceiling Suspended

Upholstered acoustic foam element
Powder coated metal frame in white (RAL 9010)
🌲 Cover: Fabric, Trevira CS+ | CS, Revive 1, Clara 2, Remix 3, Hero 2, Tonus 4, Memory 2


✂ Ø 80 cm H: 45 cm
Ø 31.50" H: 17.72"

⚖ 6,8 kg | 14.99 lbs

⋮ Ceiling Suspended Straight or Split
3x black or alu cables 2 or 5 m | 78.74" or 196.85"

⚠ If installing on suspended ceiling, verify load capacity prior to installation.

BuzziTube L

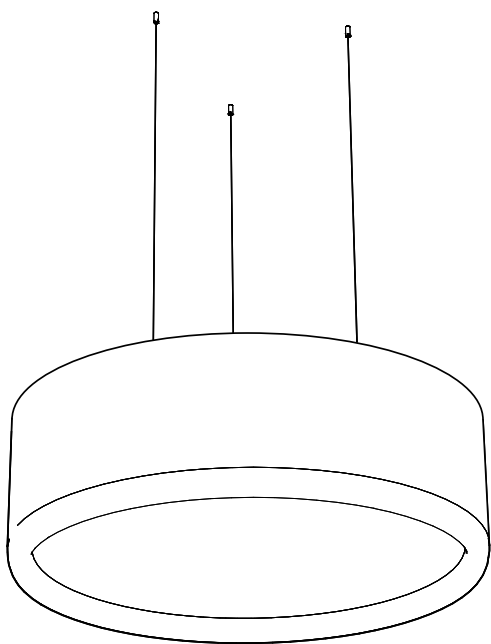

🔑 Ceiling Suspended

Upholstered acoustic foam element



Powder coated metal frame in white (RAL 9010)

Cover: Fabric, Trevira CS, Revive 1, Clara 2, Remix 3, Hero 2, Tonus 4, Arda, Memory 2



Ø 120 cm H: 40 cm

Ø 47.2" H: 15.75"



11 kg | 24.25 lbs




Ceiling Suspended Straight

3x black or alu cables 2 or 5 m | 78.74" or 196.85"



If installing on suspended ceiling, verify load capacity prior to installation.

BuzziTube XL

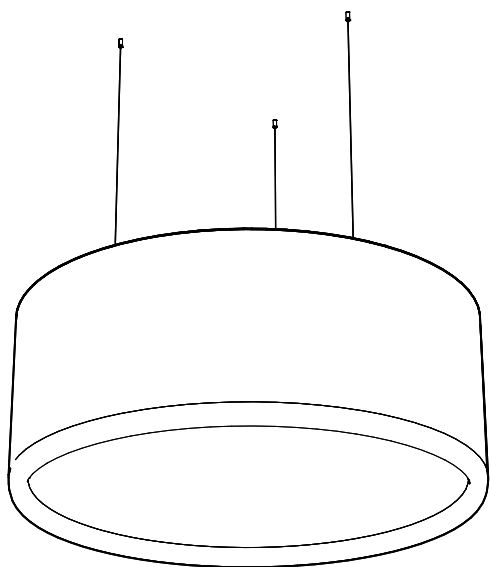

🔑 Ceiling Suspended

Upholstered acoustic foam element



Powder coated metal frame in white (RAL 9010)

Cover: Fabric, Trevira CS, Revive 1, Clara 2, Remix 3, Hero 2, Tonus 4, Arda, Memory 2



Ø 120 cm H: 52,5 cm

Ø 47.24" H: 20.67"



13 kg | 28.66 lbs




Ceiling Suspended Straight

3x black or alu cables 2 or 5 m | 78.74" or 196.85"



If installing on suspended ceiling, verify load capacity prior to installation.

BuzziTube XXL

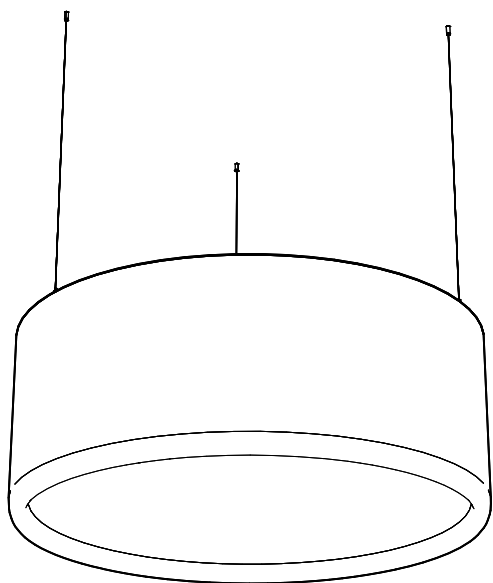

🔑 Ceiling Suspended

Upholstered acoustic foam element



Powder coated metal frame in white (RAL 9010)

Cover: Fabric, Trevira CS, Revive 1, Clara 2, Remix 3, Hero 2, Tonus 4, Arda, Memory 2



Ø 150 cm H: 60 cm

Ø 59.06" H: 23.62"



18 kg | 39.68 lbs




Ceiling Suspended Straight

3x black or alu cables 2 or 5 m | 78.74" or 196.85"



If installing on suspended ceiling, verify load capacity prior to installation.

BuzziTube 3XL

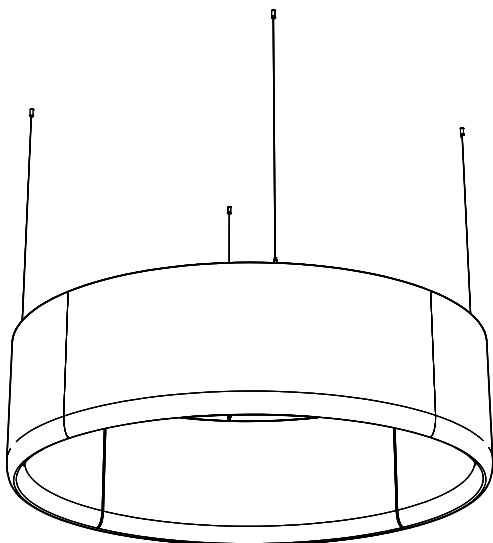

🔑 Ceiling Suspended

Upholstered acoustic foam element



Powder coated metal frame in white (RAL 9010)

Cover: Fabric, Trevira CS, Revive 1, Clara 2, Remix 3, Hero 2, Tonus 4, Arda, Memory 2



Ø 180 cm H: 52,5 cm

Ø 70.87" H: 20.67"



24 kg | 52.91 lbs




Ceiling Suspended Straight

4 x black or alu cables 2 or 5 m | 78.74" or 196.85"



If installing on suspended ceiling, verify load capacity prior to installation.

BuzziTube 4XL

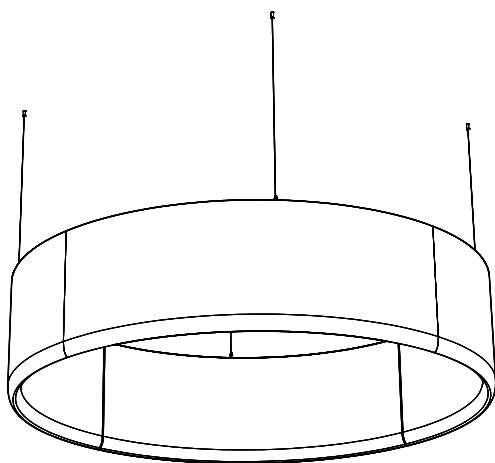

🔑 Ceiling Suspended

Upholstered acoustic foam element



Powder coated metal frame in white (RAL 9010)

Cover: Fabric, Trevira, Revive 1, Clara 2, Remix 3, Hero 2, Tonus 4, Arda, Memory 2



Ø 250 cm H: 62,5 cm

Ø 98.43" H: 24.60"



36 kg | 79.37 lbs



Ceiling Suspended Straight



4 x black or alu cables 2 or 5 m | 78.74" or 196.85"



If Installing on suspended ceiling, verify load capacity prior to installation.

Mounting


Ceiling Suspended Straight

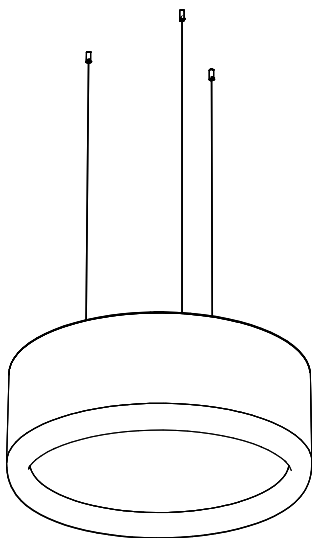

Ceiling Suspended Straight

Fixing System Screw with:
S | M | L | XL | XXL:

3 cables of 2 or 5 m | 78.74" or 196.85" (black or alu)





3XL | 4XL:

4 cables of 2 or 5 m | 78.74" or 196.85" (black or alu)

Min. distance of shade to ceiling is 10 cm | 3.94"


Ceiling Suspended Split (only available for BuzziTube S | M)

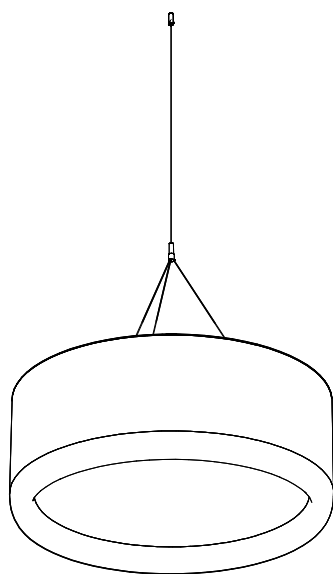

Ceiling Suspended Split


Fixing System Screw with 3 split cables and 1 main
cable, total length of 2 - 5 m | 78.74" – 196.85"
(black or alu)

Min. distance of shade to ceiling is 50 cm | 19.69"



Fabrics

Fabric (45 colors)



Category A

Composition 70% Recycled Wool, 25% Recycled Polyacryl,
5% Recycled Other Fabrics

Weight 405 g/m² | 11.94 oz/yd²

Abrasion resistance 40.000 Martindale, 50,000 Wyzenbeek

Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette).
EN 1021.2/2006 | BS EN 1021.2/2006 (match)
USA: CAL TB 117 | ASTM E84 CLASS A


Fastness to light EU: 4 | USA 4

Fastness to rubbing EU: Wet 3-4 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Trevira CS (47 colors)



Category A

Weight 420 g/m² | 12.39 oz/yd²

Composition 100% Polyester, Trevira CS

Abrasion resistance 100.000 Martindale, 90,000 Wyzenbeek

Flammability BS 5852 part II: CRIB 5 | BS 7176 Medium Hazard
USA: CAL TB 117 | M1 | B1 | EN 1021/1-2 | C1 |
IMO Res. A652 (16)


Fastness to light EU: 6 | USA 5

Fastness to rubbing EU: Wet 4-5 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Revive 1 (25 colors)



Category A

Composition 100% recycled polyester FR

Weight 430 g/lin.m

Abrasion resistance 60.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1
UNI 9175 1IM | US Cal. Tech. Bull. 117
IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 5, wet 4-5


Pilling Note 4-5, EN ISO 12945



kvadrat

Clara 2 (24 colors)

kvadrat



Category B

Composition 92% new wool, 8% nylon

Weight 400 g/lin.m

Abrasion resistance 80.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852, ignition source 2-3 | DIN 4102 B2
NF D 60 013 | UNI 9175 1IM | US Cal. Tech. Bull. 117, Sec. E
NFPA 260 | IMO A.652(16)

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 4, EN ISO 12945



Remix 3 (73 colors)

kvadrat



Category B

Composition 90% new wool, 10% nylon

Weight 415 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1
Önorm B1/Q1 | NF D 60 013 | UNI 9175, 1IM
AS/NZS 1530.3 | Cal. Tech. Bull. 117-2013
NFPA 260 | IMO FTP Code 2010:Part 8

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 4, EN ISO 12945



Hero 2 (33 colors)

kvadrat



Category C

Composition 97% new wool, 3% nylon

Weight 580 g/lin.m

Abrasion resistance 45.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B2 | NF D 60 013
UNI 9175 1IM | US Cal. Bull. 117-2013 | NFPA 260
IMO A.652 (16)

Fastness to light Note 5-6, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4-5

Pilling Note 3-4, EN ISO 12945



Tonus 4 (47 colors)

kvadrat



Category D

Composition 90% new wool, 10% Helanca

Weight 665 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1 | DIN 4102 B2

Önorm B1/Q1 | NF D 60 013 | UNI 9175 1IM

US Cal. Bull. 117-2013 | NFPA 260 | IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 3-5, wet 3-5

Pilling Note 3, EN ISO 12945



Arda (12 colors)

kvadrat



Category E

Composition 70% new wool 21% polyester 9% nylon

Weight 800 g/lin. m | 25.8 oz/ly

Abrasion resistance

Approx. 50.000 Martindale rubs, EN ISO 12947

Flammability ASTM E84 Class A Unadhered | AS/NZS 3837 class 2 | BS 5852 part 1

BS 5852 crib 5 | DIN 4102 B2 | EN 1021-1/2 | IMO FTP Code 2010 Part 8

UNI 9175 1IM | US Cal. Bull. 117-2013

Fastness to light Note 5-8, ISO 105-B02

Fastness to rubbing Dry note 3-5 ISO 105-X12


Wet note 3-5 ISO 105-X12

Pilling Note 4, EN ISO 12945



Memory 2 (20 colors)

kvadrat



Category E

Composition 100% Trevira CS

Weight 700 g/lin.m

Abrasion resistance

35.000 rubs acc. to the Martindale method, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1

NF D 60 013 | NF P 92 507 M1 | UNI 9175 1IM

UNI 9177 classe 1 | US Cal. Tech. Bull. 117

IMO A.652 (16)

Fastness to light Note 5-8, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4-5


Pilling Note 4, EN ISO 12945





Dimensions

BuzziTube S




Straight

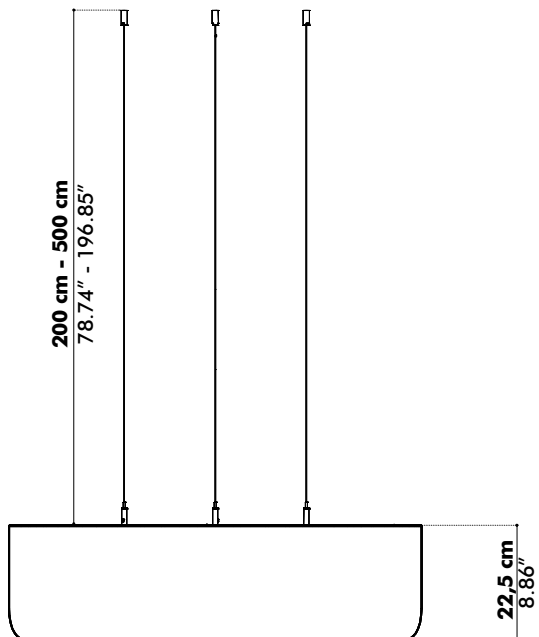



Split

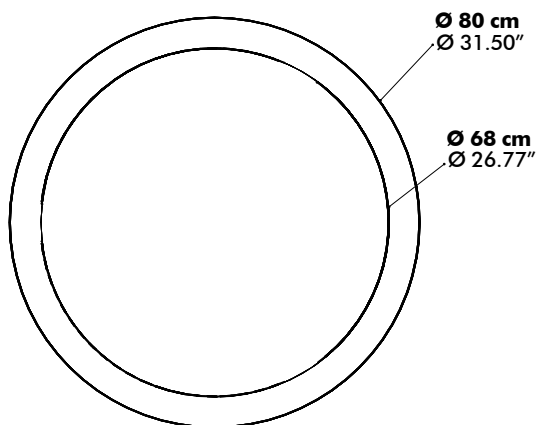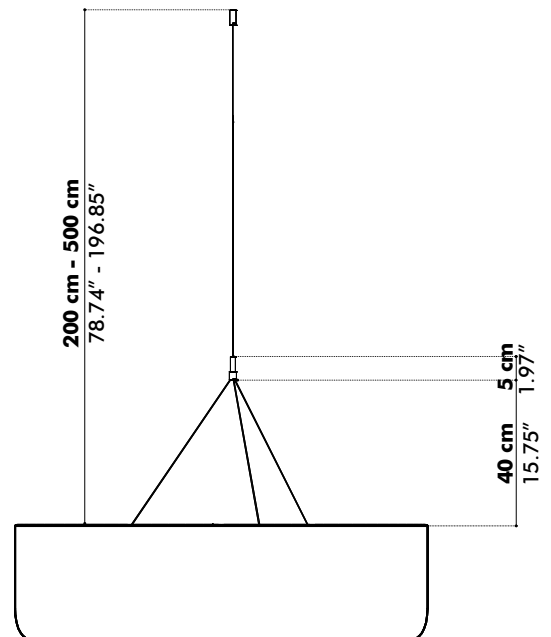



BuzziTube M

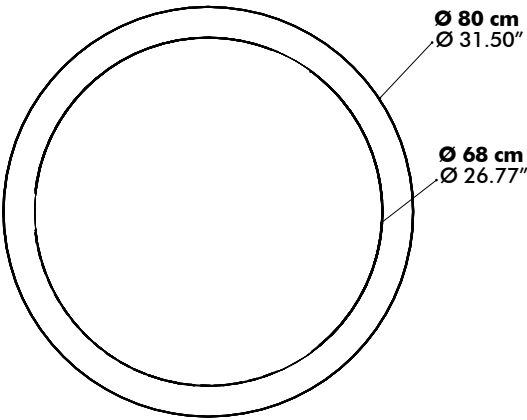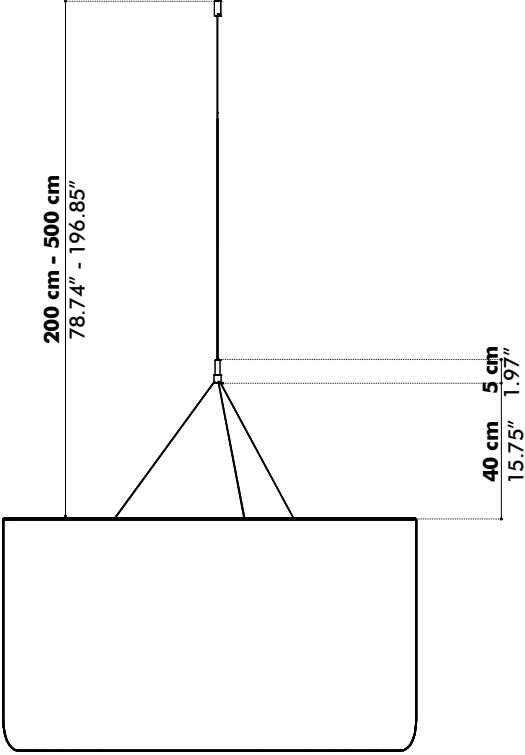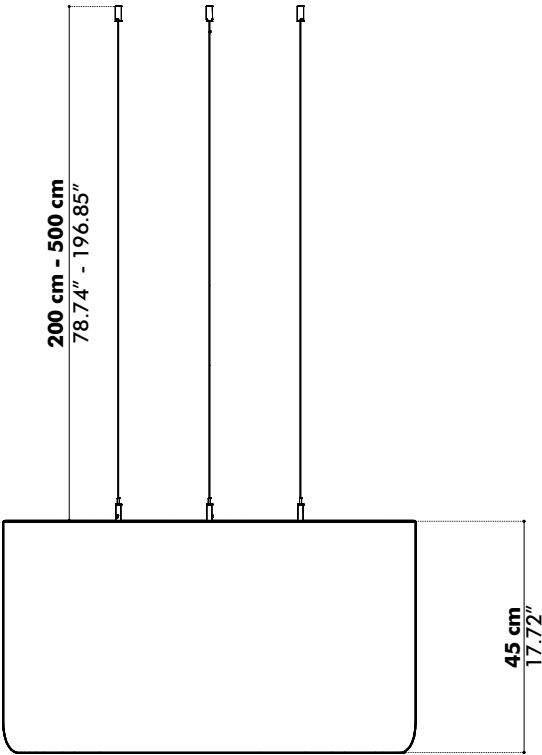



BuzziTube L

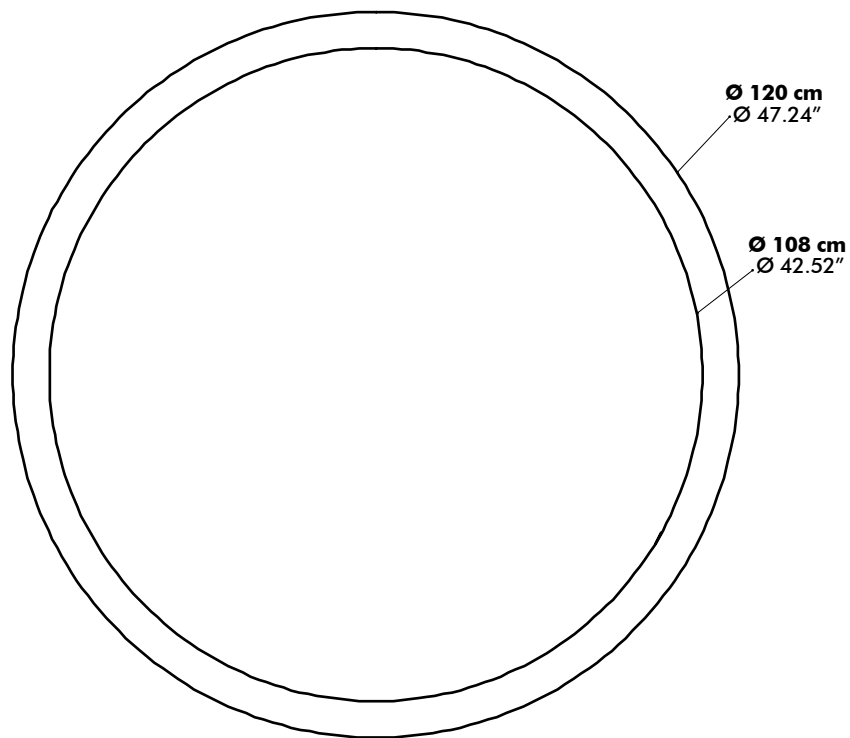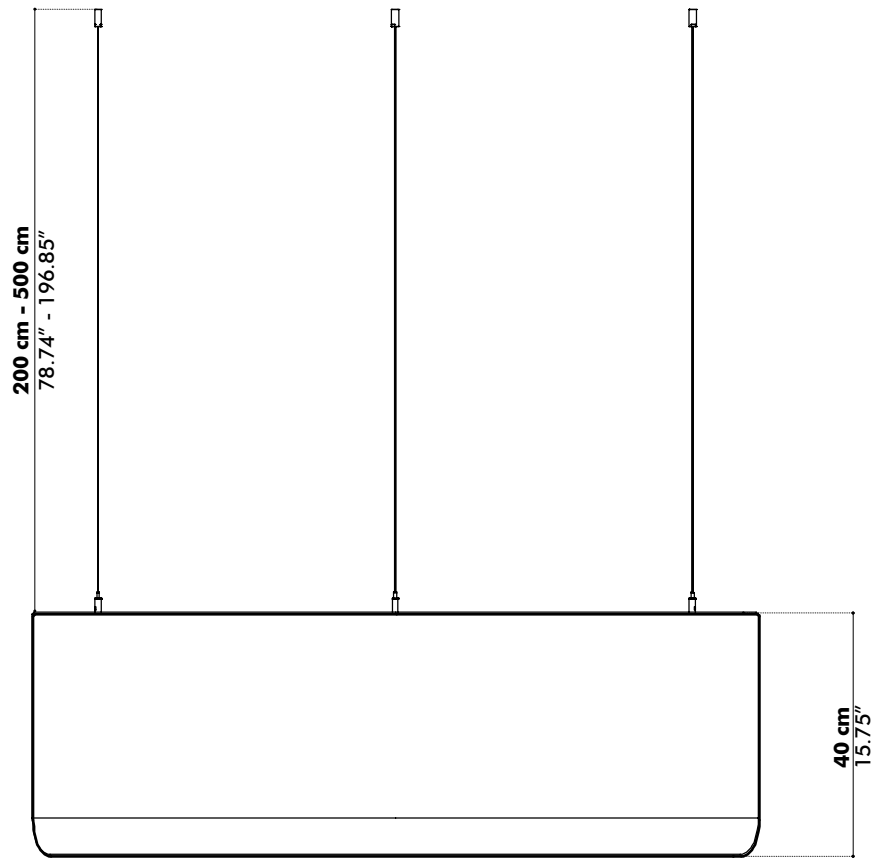



BuzziTube XL

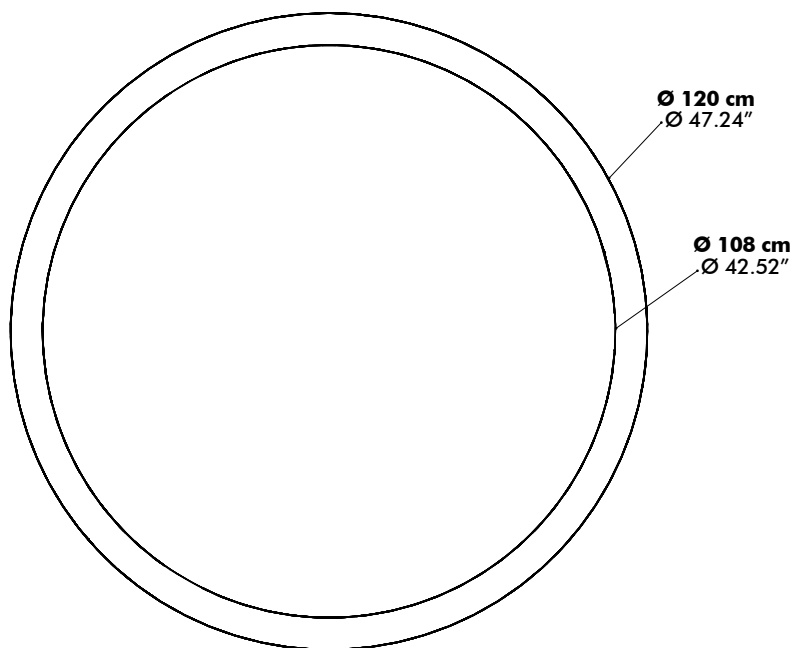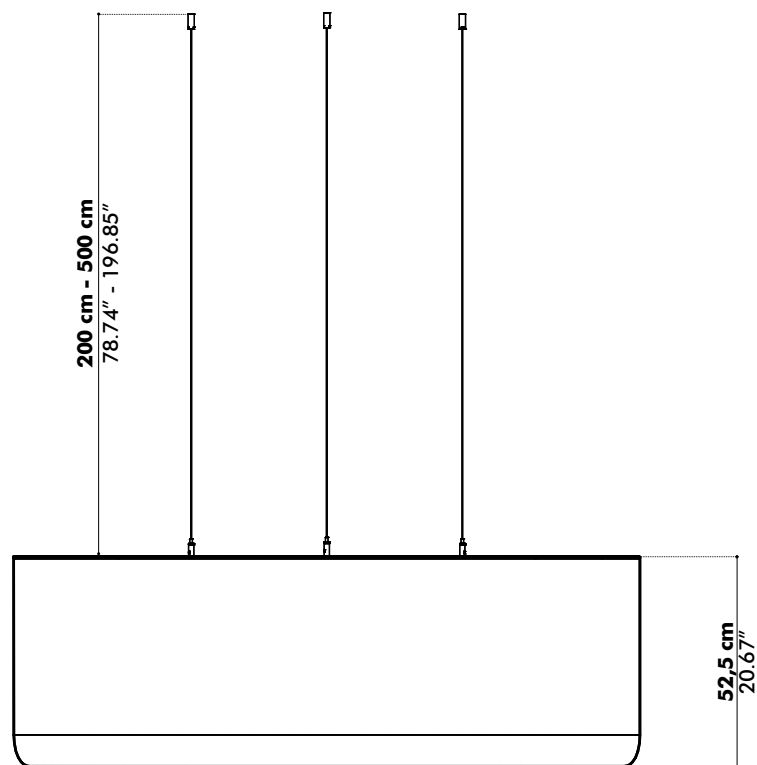



BuzziTube XXL

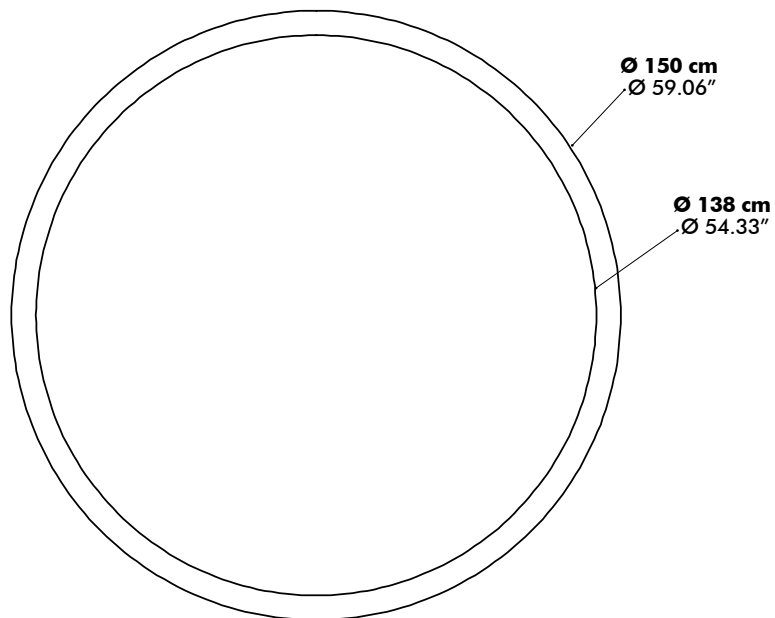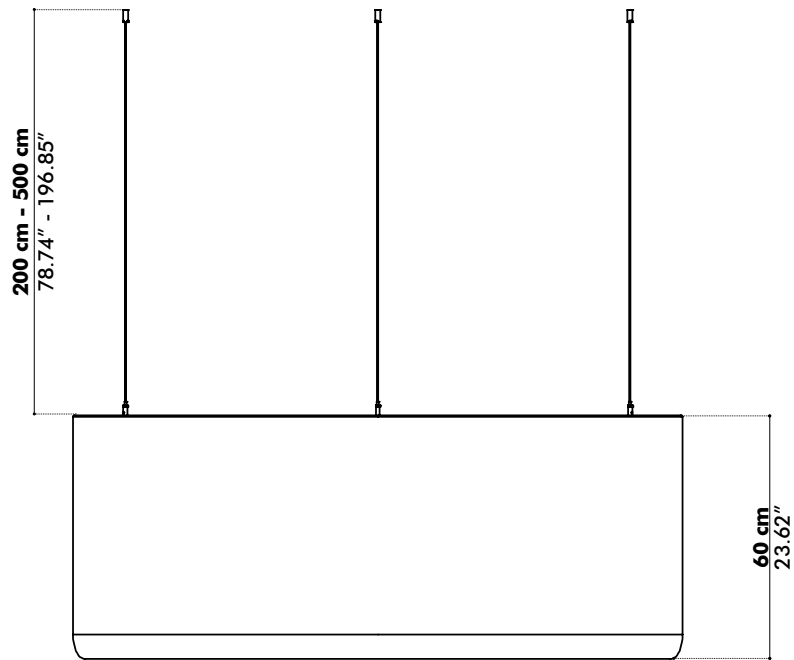

BuzziTube 3XL

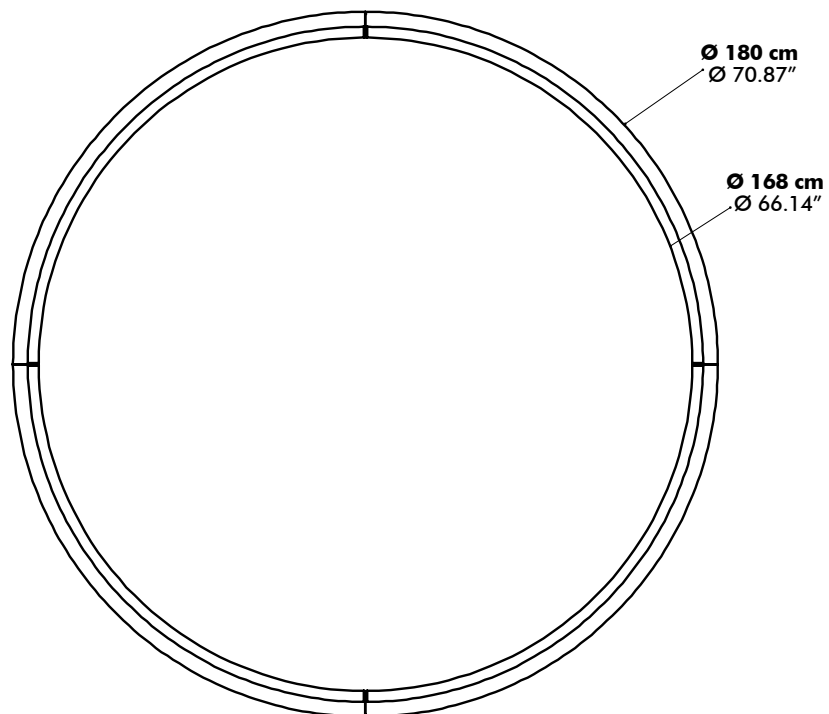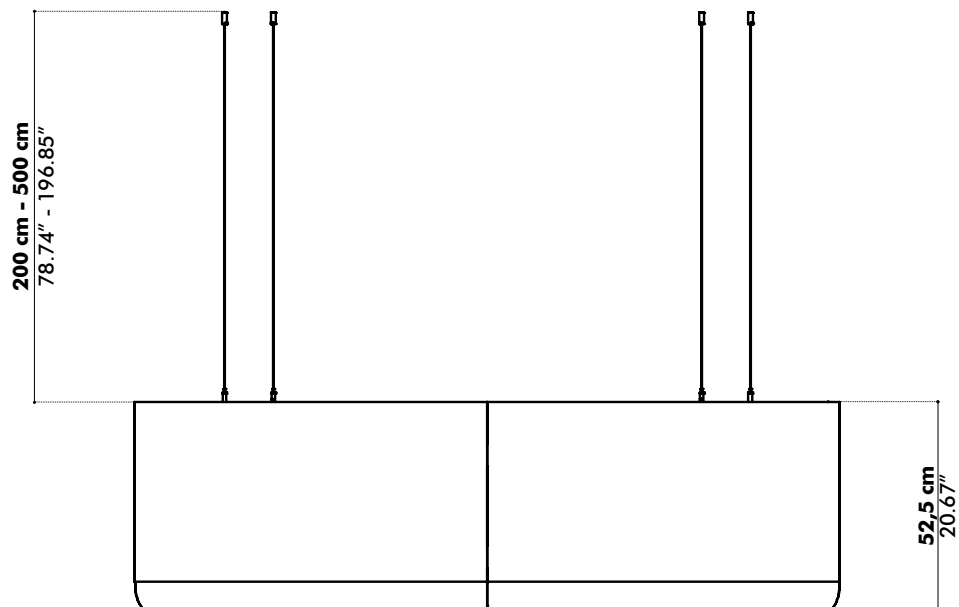

BuzziTube 4XL

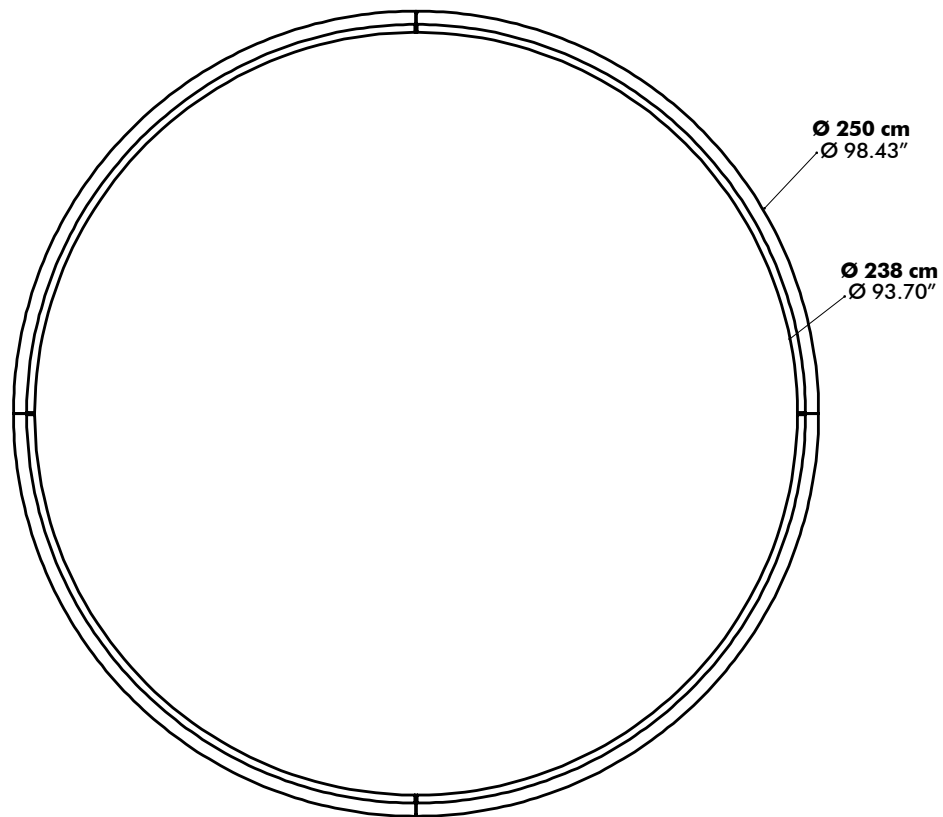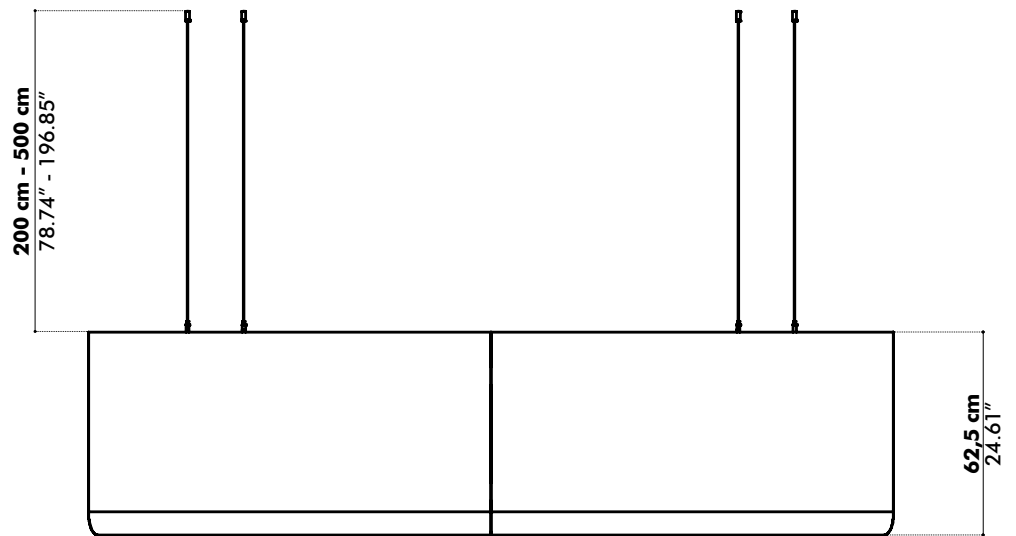

Acoustics

BuzziTube

Equivalent sound absorption area in m² per object

