

A modern wooden desk with a teal chair and a stool in a bright room. The desk is made of light-colored wood and has a teal chair with a backrest. A small stool with a teal seat and dark wood legs is positioned next to the desk. On the desk, there is a pen holder with pens and a small electronic device. The background shows a window with a view of a building and a teal board on the wall.

BuzziFrontDesk

Product Specification Sheet

This document contains technical
information about the BuzziFrontDesk



www.buzzi.space

Frontpanel for worktop

This workspace divider safeguards your privacy at work or at home. Hide away your cable clutter and computer screen in an orderly fashion. Easy to install on any workstation.

Design by BuzziSpace Studio

General



BuzziFrontDesk

Cover: BuzziFelt



Filling: cardboard + poplar plywood

Fix: Powder coated metal in black (RAL 9005) or white (9010)



Min. W 100 cm D 3,5 cm H 90 cm | W 39.37" D 1.38" H 35.43"

Max. W 180 cm D 3,5 cm H 110 cm | W 70.87" D 1.38" H 43.31"



Dry use



Flat Packed

Desk mounted

Extra layer Fabric, Trevira CS, Reflect, Revive 1, Clara 2, Remix 3, Hero 2, Tonus 4, Arda, Memory 2



Bicolor (different color front - back)

Round or straight corner

Fix L, L-Plus, XL or XXL

Certifications



Acoustics



Absorption



Diffusion



Attenuation



Mid tone




High tone

Content

Configurations	3
Components	4
Fabrics	5
Dimensions	8
Acoustics	10

Configurations

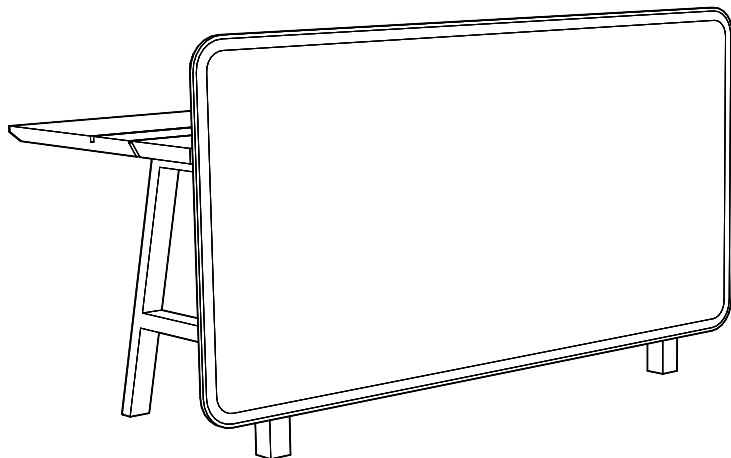

BuzziFrontDesk

Cover: BuzziFelt



Filling: cardboard + poplar plywood

Fix: Powder coated metal in black (RAL 9005) or white (9010)



Min. W 100 cm D 3,5 cm H 90 cm | W 39.37" D 1.38" H 35.43"

Max. W 180 cm D 3,5 cm H 110cm | W 70.87" D 1.38" H 43.31"

Extra layer Fabric, Trevira CS, Reflect, Revive 1, Clara 2, Remix 3, Hero 2, Tonus 4, Arda, Memory 2



Bicolor (different color front - back)


Round or straight corner

Fix L, L-Plus, XL or XXL

Components

Round or straight edges

- Round or straight corner

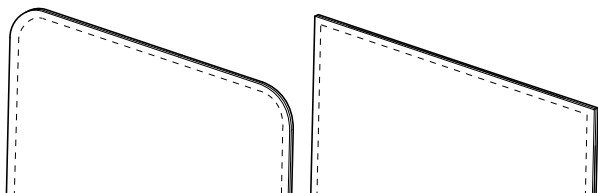

BuzziFix



Desk Mounted

Powder coated metal Black (RAL 9005) or White (RAL 9010)

- L: Worktop: 12 > 27 mm 0.47" > 1.06"
- L Plus: Worktop: 18 > 43 mm 0.71" > 1.69"
- XL: Worktop: 28 > 57 mm 1.10" > 2.24"
- XXL: Worktop: 72 mm > 98 mm 2.83" > 3.86"
(XXL applicable for PicNic desk front side)

Distance holder




Additional distance holders are included and can be mounted at the front side to provide space for electrical cables etc.

(L 1,5 cm Ø 1,5 | L 0.59" Ø 0.59")

Fabrics


Felt (12 colors)



Composition 100% Recycled P.E.T. Felt, latex backing
Weight 1.000 g/m² | 29.49 oz/yd²
Abrasion resistance >7.000 Martindale
Flammability EU: EN 13501.1 + A1/2009 Class B-s1,d0
USA: ASTM E84 Class A certified
Fastness to light USA 5




Fabric (45 colors)



Category A
Composition 70% Recycled Wool, 25% Recycled Polyacryl,
5% Recycled Other Fabrics
Weight 405 g/m² | 11.94 oz/yd²
Abrasion resistance 40.000 Martindale, 50,000 Wyzenbeek
Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette).
EN 1021.2/2006 | BS EN 1021.2/2006 (match)
USA: CAL TB 117 | ASTM E84 CLASS A
Fastness to light EU: 4 | USA 4
Fastness to rubbing EU: Wet 3-4 | Dry 4-5
Fastness to crocking USA: Wet 5 | Dry 5



Trevira CS (47 colors)




Category A
Weight 420 g/m² | 12.39 oz/yd²
Composition 100% Polyester, Trevira CS
Abrasion resistance 100.000 Martindale, 90,000 Wyzenbeek
Flammability BS 5852 part II: CRIB 5 | BS 7176 Medium Hazard
USA: CAL TB 117 | M1 | B1 | EN 1021/1-2 | C1 |
IMO Res. A652 (16)
Fastness to light EU: 6 | USA 5
Fastness to rubbing EU: Wet 4-5 | Dry 4-5
Fastness to crocking USA: Wet 5 | Dry 5



Reflect (34 colors)

kvadrat



Category A

Weight 430 g/m² | 13.78 oz/yd²

Composition 100% Post-consumer recycled polyester

Abrasion resistance 100.000 Martindale

Flammability AS/NZS 3837 class 1 | ASTM E84 Class A Unadhered

ASTM E84 Class B Adhered | BS 5852 crib 5 with treatment

BS 5852 part 1 with treatment | EN 1021-1/2 | US Cal. Bull. 117-2013

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing EU: Wet 5-5 | Dry 5-5

Pilling Note 4, EN ISO 12945



Revive 1 (25 colors)

kvadrat



Category A

Composition 100% recycled polyester FR

Weight 430 g/lin.m

Abrasion resistance 60.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1

UNI 9175 1IM | US Cal. Tech. Bull. 117

IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 5, wet 4-5

Pilling Note 4-5, EN ISO 12945



Clara 2 (24 colors)

kvadrat



Category B

Composition 92% new wool, 8% nylon

Weight 400 g/lin.m

Abrasion resistance 80.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852, ignition source 2-3 | DIN 4102 B2

NF D 60 013 | UNI 9175 1IM | US Cal. Tech. Bull. 117, Sec. E

NFPA 260 | IMO A.652(16)

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 4, EN ISO 12945



Remix 3 (73 colors)

kvadrat



Category B

Composition 90% new wool, 10% nylon

Weight 415 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1

Önorm B1/Q1 | NF D 60 013 | UNI 9175, 1IM

AS/NZS 1530.3 | Cal. Tech. Bull. 117-2013

NFPA 260 | IMO FTP Code 2010:Part 8

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 4, EN ISO 12945



Hero 2 (33 colors)

kvadrat



Category C

Composition 97% new wool, 3% nylon

Weight 580 g/lin.m

Abrasion resistance 45.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B2 | NF D 60 013
UNI 9175 1IM | US Cal. Bull. 117-2013 | NFPA 260
IMO A.652 (16)

Fastness to light Note 5-6, ISO 105-B02


Fastness to rubbing (ISO) dry 4-5, wet 4-5

Pilling Note 3-4, EN ISO 12945



Tonus 4 (47 colors)

kvadrat



Category D

Composition 90% new wool, 10% Helanca

Weight 665 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1 | DIN 4102 B2
Önorm B1/Q1 | NF D 60 013 | UNI 9175 1IM
US Cal. Bull. 117-2013 | NFPA 260 | IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 3-5, wet 3-5

Pilling Note 3, EN ISO 12945



Arda (12 colors)

kvadrat



Category E

Composition 70% new wool 21% polyester 9% nylon

Weight 800 g/lin. m | 25.8 oz/ly

Abrasion resistance

Approx. 50.000 Martindale rubs, EN ISO 12947

Flammability ASTM E84 Class A Unadhered | AS/NZS 3837 class 2 | BS 5852 part 1
BS 5852 crib 5 | DIN 4102 B2 | EN 1021-1/2 | IMO FTP Code 2010 Part 8
UNI 9175 1IM | US Cal. Bull. 117-2013

Fastness to light Note 5-8, ISO 105-B02

Fastness to rubbing Dry note 3-5 ISO 105-X12


Wet note 3-5 ISO 105-X12

Pilling Note 4, EN ISO 12945



Memory 2 (20 colors)

kvadrat





Category E
Composition 100% Trevira CS
Weight 700 g/lin.m
Abrasion resistance
35.000 rubs acc. to the Martindale method, EN ISO 12947
Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1
NF D 60 013 | NF P 92 507 M1 | UNI 9175 11M
UNI 9177 classe 1 | US Cal. Tech. Bull. 117
IMO A.652 (16)
Fastness to light Note 5-8, ISO 105-B02
Fastness to rubbing (ISO) dry 4-5, wet 4-5
Pilling Note 4, EN ISO 12945



Dimensions

Panel

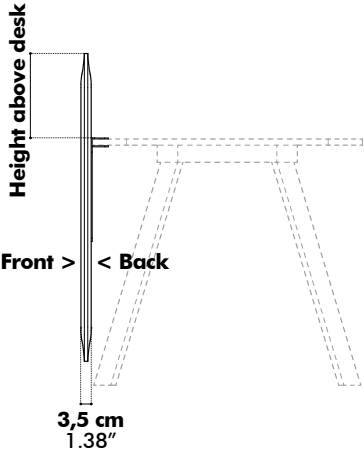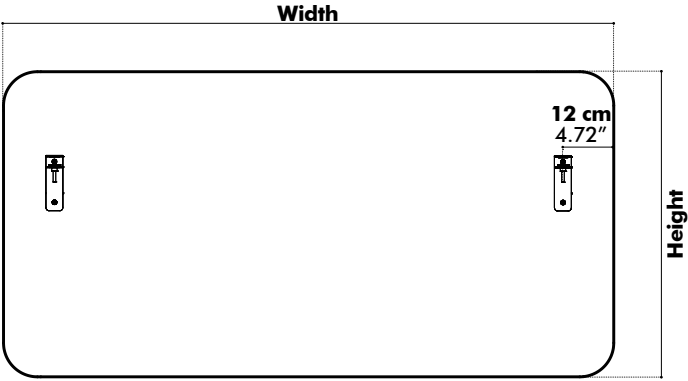


Height above Desk		Width	Weight
Total height			
25 cm 9.84"	XS	100 cm 39.37"	3,4 kg 7.5 lbs
	S	120 cm 47.24"	4,1 kg 9.04 lbs
	M	140 cm 55.12"	4,8 kg 10.58 lbs
	L	160 cm 62.99"	5,5 kg 12.13 lbs
	XL	180 cm 70.87"	6,2 kg 13.67 lbs
35 cm 13.78"	XS	100 cm 39.37"	3,8 kg 8.38 lbs
	S	120 cm 47.24"	4,6 kg 10.14 lbs
	M	140 cm 55.12"	5,4 kg 11.90 lbs
	L	160 cm 62.99"	6,1 kg 13.45 lbs
	XL	180 cm 70.87"	6,9 kg 15.21 lbs
45 cm 17.72"	XS	100 cm 39.37"	4,2 kg 9.26 lbs
	S	120 cm 47.24"	5,1 kg 11.24 lbs
	M	140 cm 55.12"	5,9 kg 13.01 lbs
	L	160 cm 62.99"	6,7 kg 14.77 lbs
	XL	180 cm 70.87"	7,6 kg 16.76 lbs

Fixes



Fix L

Worktop: 12 > 27 mm | 0.47" > 1.06"

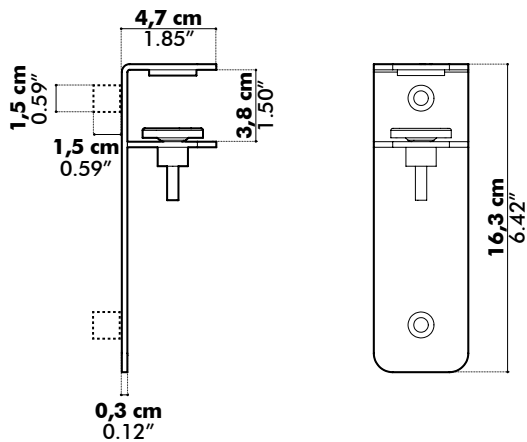


Fix L Plus

Worktop: 18 > 43 mm | 0.71" > 1.69"

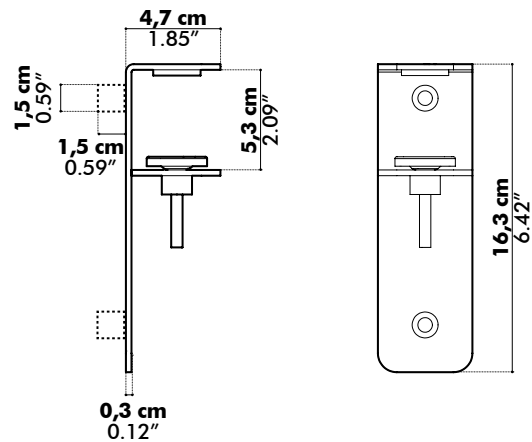


Fix XL

Worktop: 28 > 57 mm | 1.10" > 2.24"

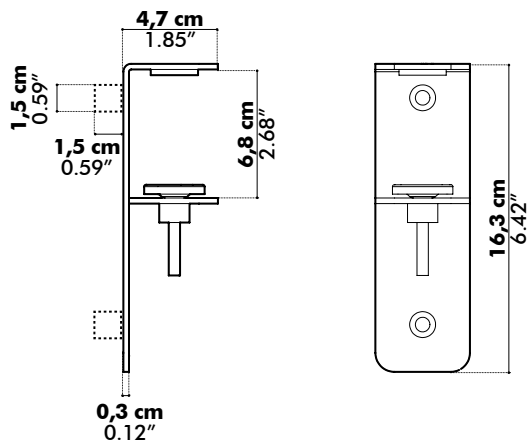


Fix XXL

Worktop: 72 mm > 98 mm | 2.83" > 3.86"

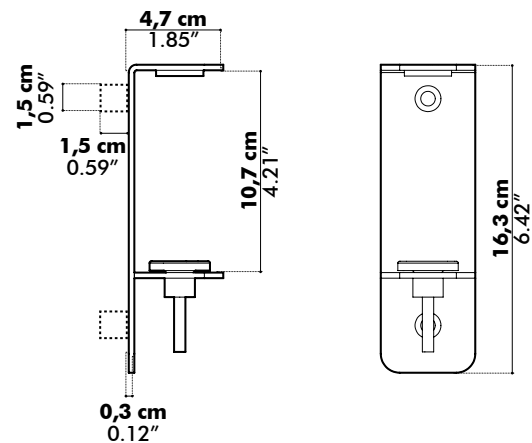

Acoustics

Equivalent sound absorption area in m² per object

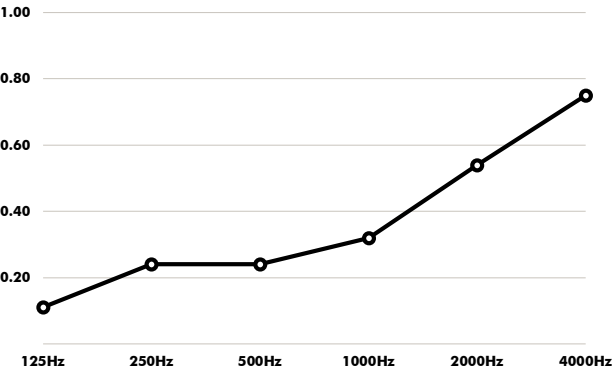

Hz	Aeq/m²
125	0.11
250	0.24
500	0.24
1000	0.32
2000	0.54
4000	0.75