

BuzziHug

Product Specification Sheet

This document contains technical
information about the BuzziHug



www.buzzi.space

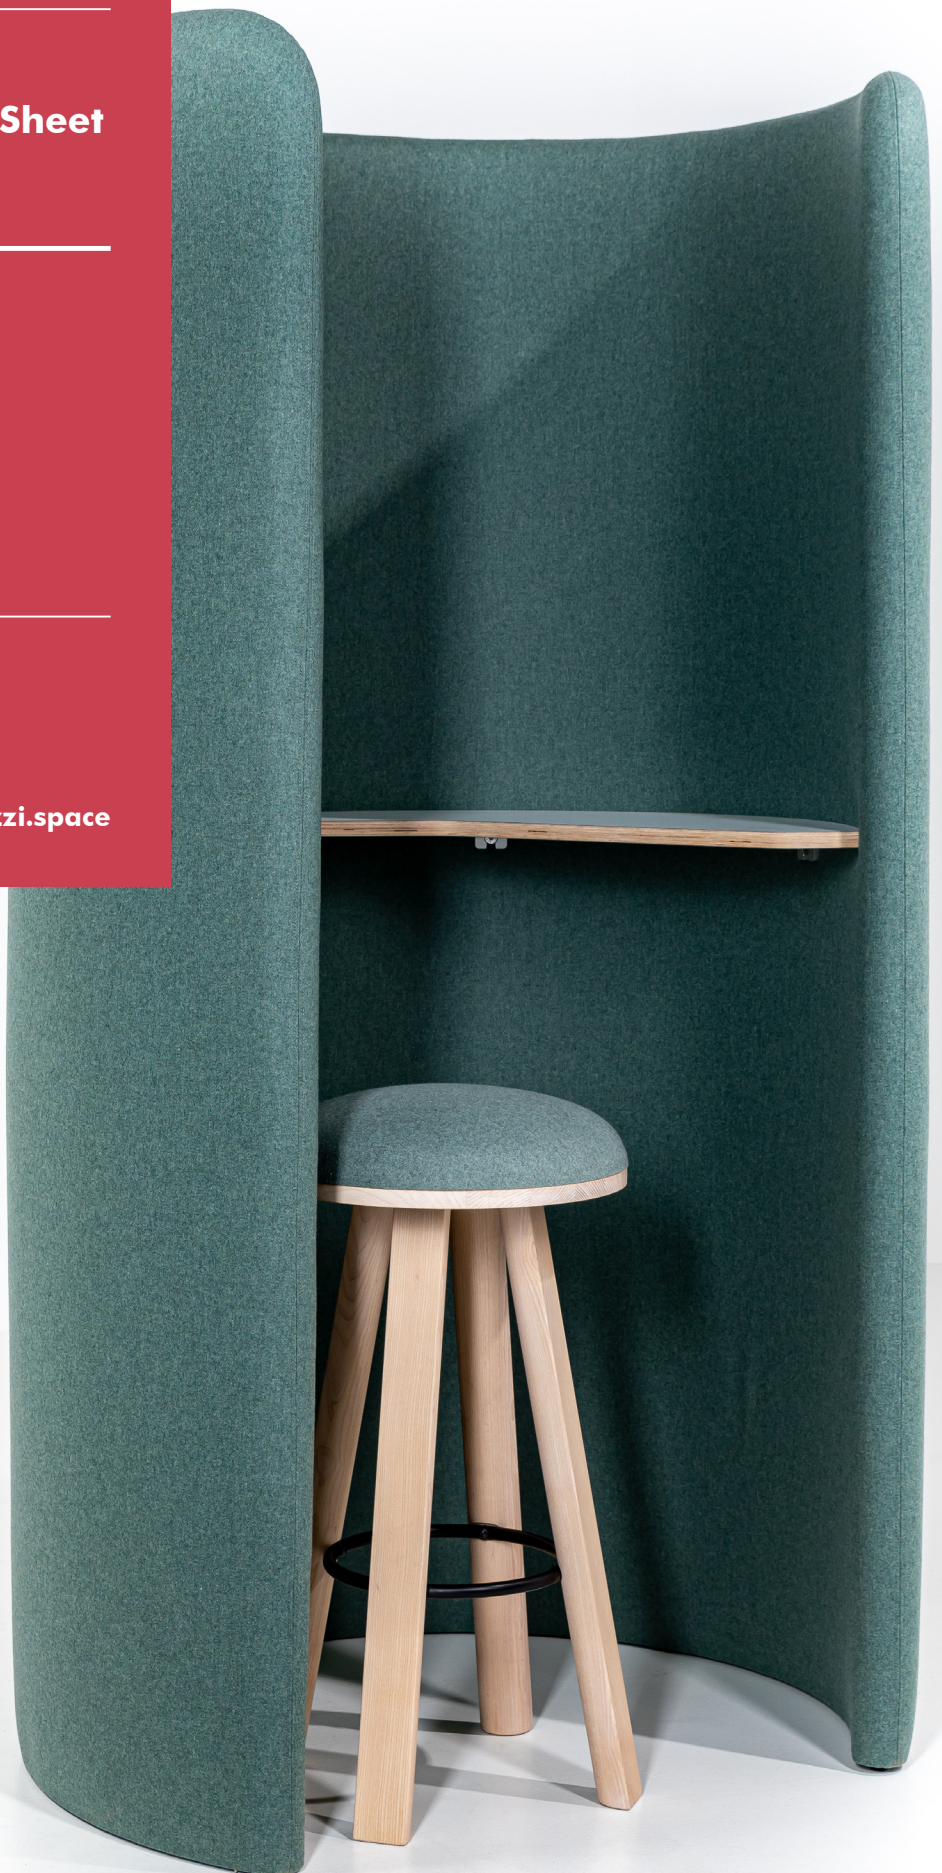

A versatile privacy booth for the ever-changing workspace

BuzziHug is a semi-enclosed privacy booth that instantly creates a cozy and safe working environment for employees to hold video calls or to get focused work done. Due to its voluminous upholstered body, BuzziHug effectively mitigates excessive noise while doubling as an unexpected design element within any workspace. BuzziHug is equipped with a built-in table in either Antwerp Oak or White Laminate. Select an optional LED light with one USB charging port so you can keep your laptop, smartphone, and other devices charged at all times. Due to its lightweight and flexible attributes, BuzziHug can be placed anywhere in an open space. Built with a sturdy core and adjustable feet, BuzziHug can also be bolted to the ground to prevent it from falling over during earthquakes and seismic shocks.

Design by BuzziSpace Studio

General



BuzziHug



Upholstered acoustic foam element with wooden structure

Tablet: Antwerp Oak or White Laminate

Fabrics: Fabric, Trevira CS, Revive 1, Remix 3, Clara 2, Hero 2, Tonus 4, Arda or Memory 2



Dry Use



Assembled



LED light in black aluminium with one USB charger

Certifications

Light: CE/CB, cULus Listed E473379

Acoustics



Absorption



Attenuation



Low Tone



Mid Tone




High Tone

Content

Configurations	3
Components	4
Options	5
Photometric Data	5
Fabrics	6
Dimensions	9
Acoustics	11

Configuration

BuzziHug

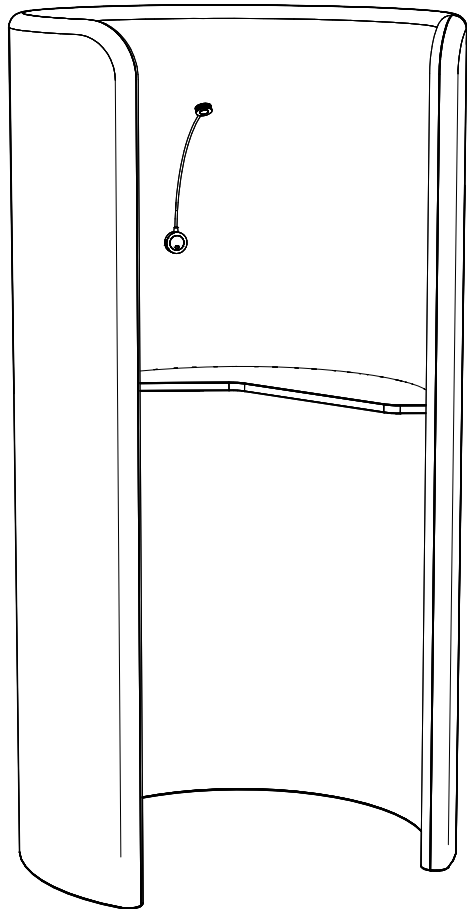

Upholstered acoustic foam element with wooden structure
Tablet: Antwerp Oak or White Laminate
Fabrics: Fabric, Trevira CS, Revive 1, Remix 3, Clara 2, Hero 2, Tonus 4, Arda or Memory 2



Length: 100 cm | 39.37"
Width: 100 cm | 39.37"
Height: 190 cm | 74.80"
Height Worktop: 105 cm | 41.34"



33 kg | 72.75 lbs

LED light in black aluminium with one USB charger
Switch: built-in switch with 2 light levels
USB: 1x USB charging 5V/2,5A
Wattage: 1,4W




Input Voltage: 12V
Lumen Output: 120 lumen
Color Temperature: 3000K
Color Rendering Index: >90
Material: aluminium

Components

Tablet



Antwerp Oak: These solid wood tablet may contain knots, natural color variations and drying splits as normal features of the product. This contributes to the uniqueness of each tablet.

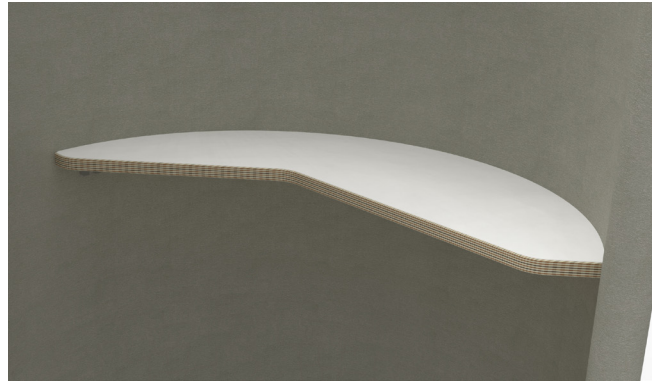

White Laminate with birch multiplex core

Feet



4 adjustable feet are included

Fixing plates



BuzziHug can be bolted to the ground to prevent it from falling over during earthquakes and seismic shocks.

2 fixing plates are included
(powder coated metal in black RAL 9005)

Options

Light Source



LED light in black aluminium with one USB charger
Switch: built-in switch with 2 light levels
USB: 1x USB charging 5V/2,5A
Wattage: 1,4W
Input Voltage: 12V
Lumen Output: 120 lumen
Color Temperature: 3000K
Color Rendering Index: >90
Material: aluminium

Certification: CE | cULus Listed E473379


Power Cord



Power Cord available for EU/US/UK
Included Power Cord 2 m | 78.74"


Photometric Data

Light Source

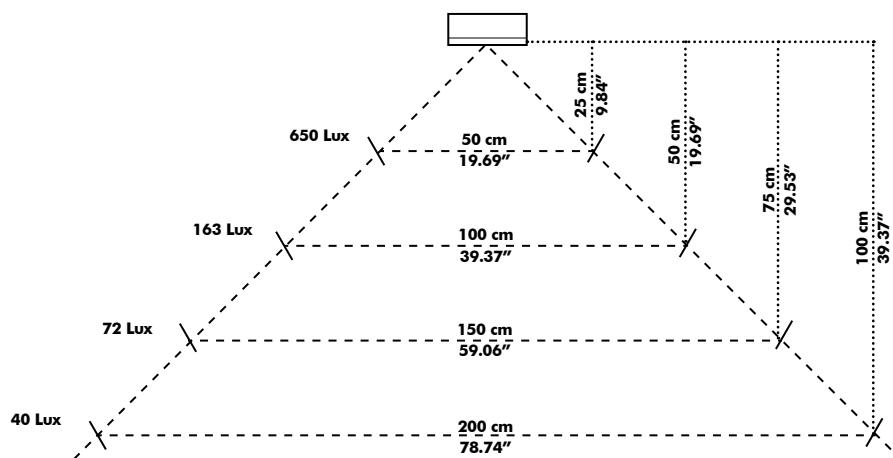

Fabrics

Fabric (45 colors)



Category A

Composition 70% Recycled Wool, 25% Recycled Polyacryl,
5% Recycled Other Fabrics

Weight 405 g/m² | 11.94 oz/yd²

Abrasion resistance 40.000 Martindale, 50,000 Wyzenbeek

Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette).
EN 1021.2/2006 | BS EN 1021.2/2006 (match)
USA: CAL TB 117 | ASTM E84 CLASS A


Fastness to light EU: 4 | USA 4

Fastness to rubbing EU: Wet 3-4 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Trevira CS (47 colors)



Category A

Weight 420 g/m² | 12.39 oz/yd²

Composition 100% Polyester, Trevira CS

Abrasion resistance 100.000 Martindale, 90,000 Wyzenbeek

Flammability BS 5852 part II: CRIB 5 | BS 7176 Medium Hazard
USA: CAL TB 117 | M1 | B1 | EN 1021/1-2 | C1 |
IMO Res. A652 (16)


Fastness to light EU: 6 | USA 5

Fastness to rubbing EU: Wet 4-5 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Revive 1 (25 colors)



Category A

Composition 100% recycled polyester FR

Weight 430 g/lin.m

Abrasion resistance 60.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1
UNI 9175 1IM | US Cal. Tech. Bull. 117
IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 5, wet 4-5


Pilling Note 4-5, EN ISO 12945



kvadrat

Clara 2 (24 colors)

kvadrat



Category B

Composition 92% new wool, 8% nylon

Weight 400 g/lin.m

Abrasion resistance 80.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852, ignition source 2-3 | DIN 4102 B2
NF D 60 013 | UNI 9175 11M | US Cal. Tech. Bull. 117, Sec. E
NFPA 260 | IMO A.652(16)

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 4, EN ISO 12945



Remix 3 (73 colors)

kvadrat



Category B

Composition 90% new wool, 10% nylon

Weight 415 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1
Önorm B1/Q1 | NF D 60 013 | UNI 9175, 11M
AS/NZS 1530.3 | Cal. Tech. Bull. 117-2013
NFPA 260 | IMO FTP Code 2010:Part 8

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 4, EN ISO 12945



Hero 2 (33 colors)

kvadrat



Category C

Composition 97% new wool, 3% nylon

Weight 580 g/lin.m

Abrasion resistance 45.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B2 | NF D 60 013
UNI 9175 11M | US Cal. Bull. 117-2013 | NFPA 260
IMO A.652 (16)

Fastness to light Note 5-6, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4-5

Pilling Note 3-4, EN ISO 12945



Tonus 4 (47 colors)

kvadrat



Category D

Composition 90% new wool, 10% Helanca

Weight 665 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1 | DIN 4102 B2
Önorm B1/Q1 | NF D 60 013 | UNI 9175 11M
US Cal. Bull. 117-2013 | NFPA 260 | IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 3-5, wet 3-5

Pilling Note 3, EN ISO 12945



Arda (12 colors)

kvadrat



Category E

Composition 70% new wool 21% polyester 9% nylon

Weight 800 g/lin. m | 25.8 oz/ly

Abrasion resistance

Approx. 50.000 Martindale rubs, EN ISO 12947

Flammability ASTM E84 Class A Unadhered | AS/NZS 3837 class 2 | BS 5852 part 1
BS 5852 crib 5 | DIN 4102 B2 | EN 1021-1/2 | IMO FTP Code 2010 Part 8
UNI 9175 1IM | US Cal. Bull. 117-2013

Fastness to light Note 5-8, ISO 105-B02


Fastness to rubbing Dry note 3-5 ISO 105-X12
Wet note 3-5 ISO 105-X12

Pilling Note 4, EN ISO 12945



Memory 2 (20 colors)

kvadrat



Category E

Composition 100% Trevira CS

Weight 700 g/lin.m

Abrasion resistance

35.000 rubs acc. to the Martindale method, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1
NF D 60 013 | NF P 92 507 M1 | UNI 9175 1IM
UNI 9177 classe 1 | US Cal. Tech. Bull. 117
IMO A.652 (16)

Fastness to light Note 5-8, ISO 105-B02


Fastness to rubbing (ISO) dry 4-5, wet 4-5

Pilling Note 4, EN ISO 12945




Dimensions


BuzziHug

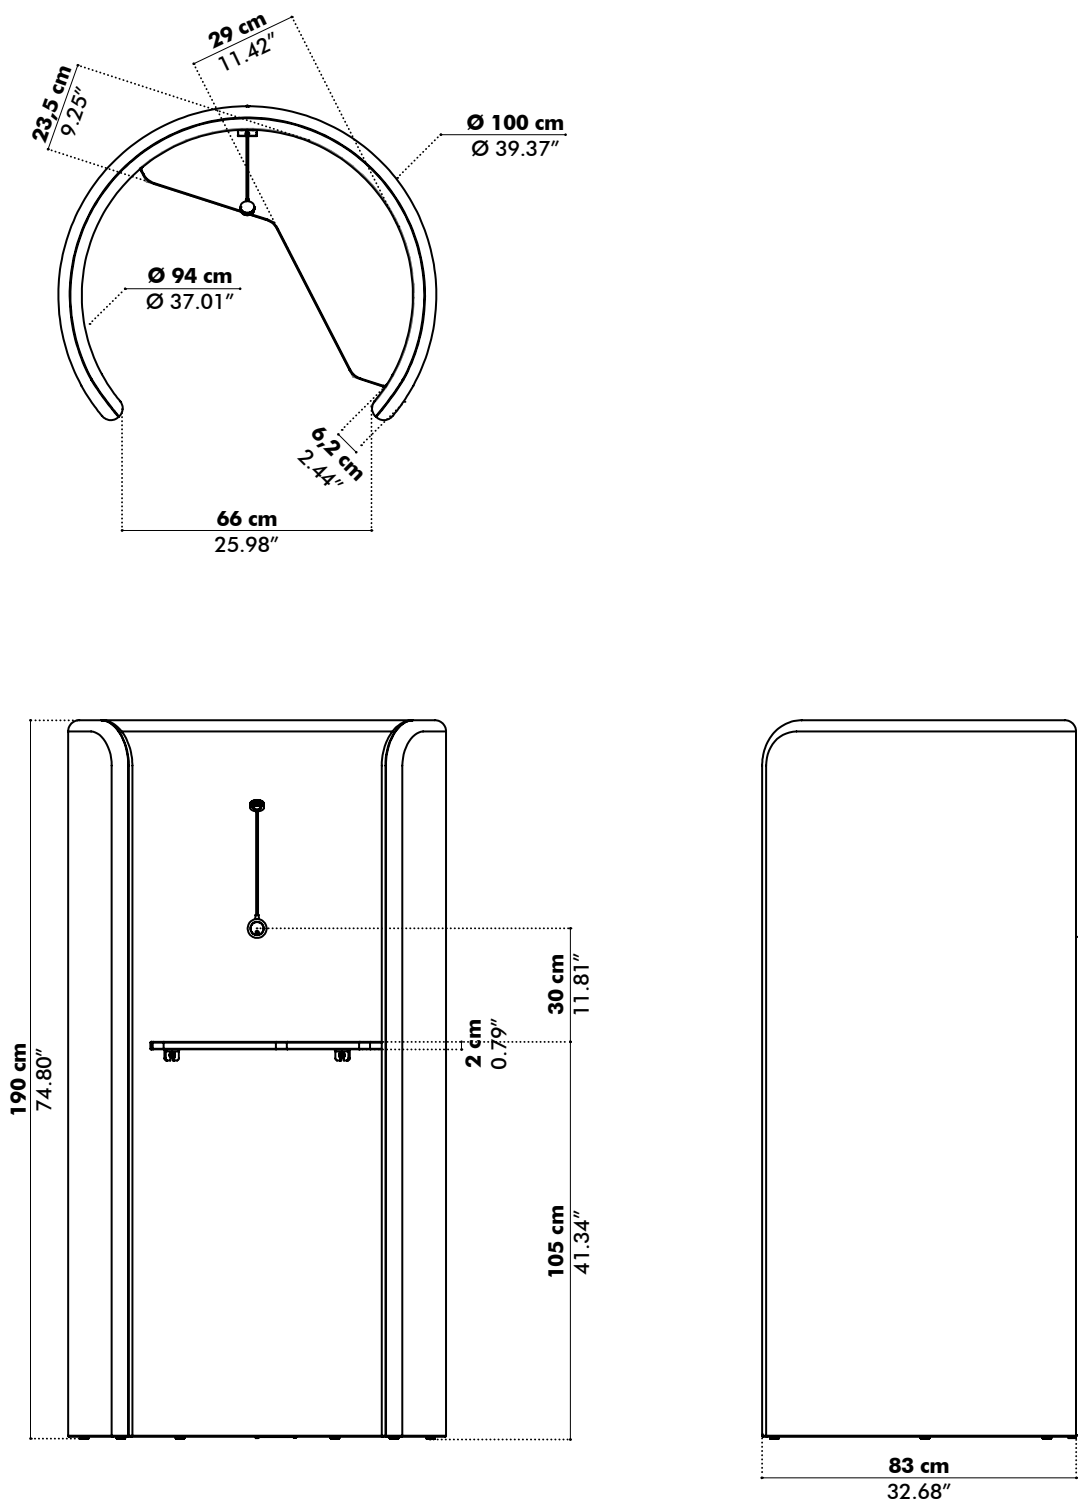

Fixing plates

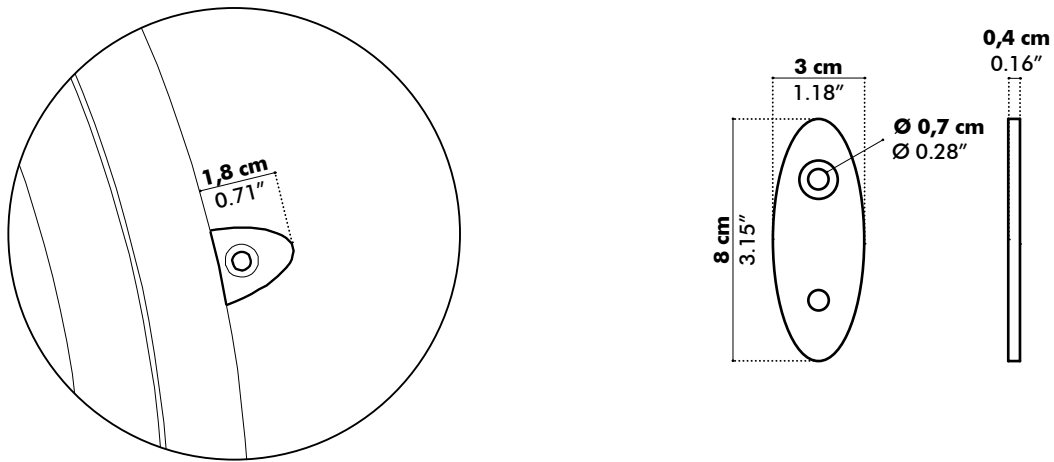

Light Source

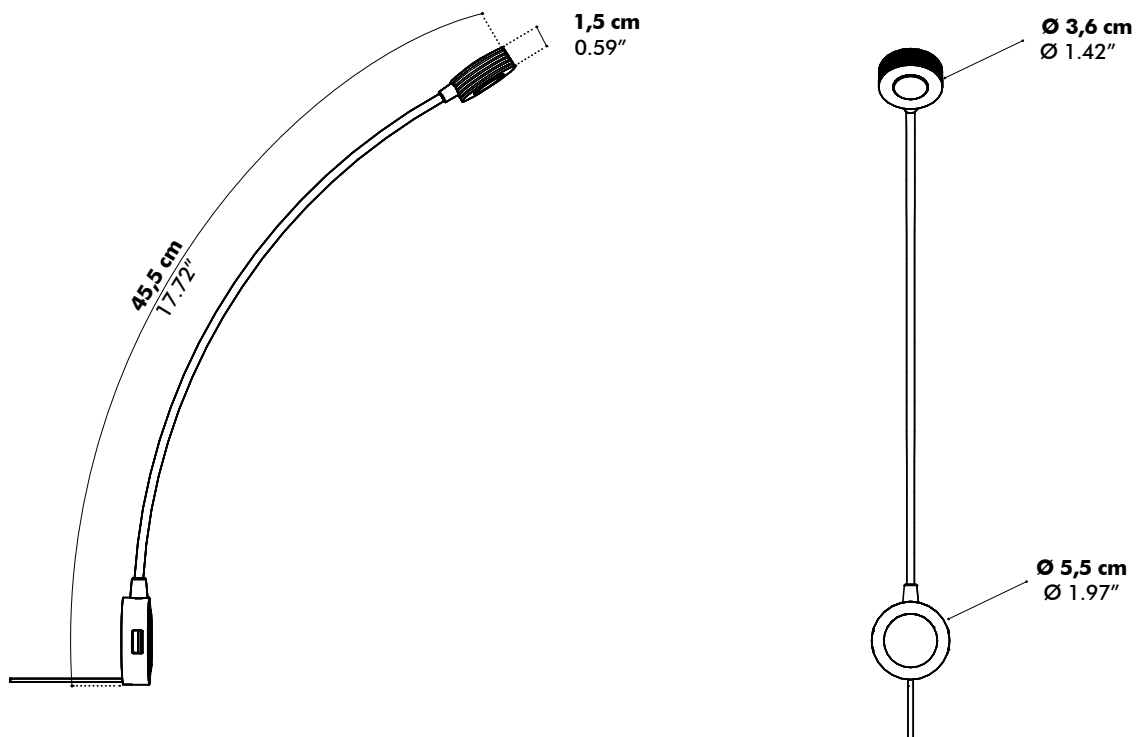

Acoustics

BuzziHug

Equivalent sound absorption area in m² per object

