
## BuzziNest Pod US Product Specification Sheet

This document contains technical information about the BuzziNest Pod

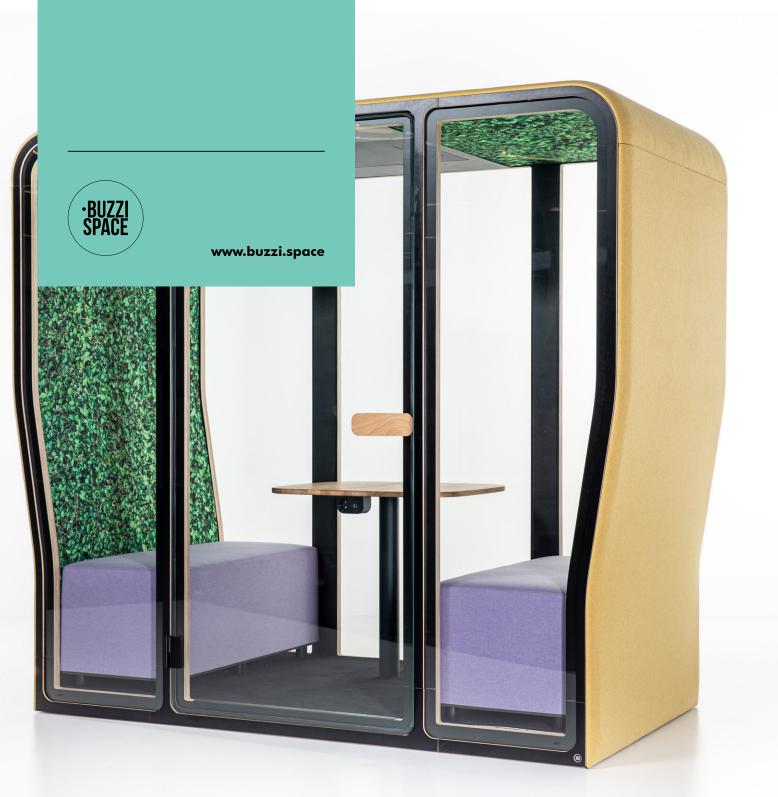

#### Silent workspaces anywhere

BuzziNest Pod is all you need to erase distractive noise from any workplace. The compact acoustic privacy booth offers a private space to work and take calls, and can additionally accommodate up to four people to hold face-to-face meetings and collaborations in any open space without disturbing others, and most importantly, being disturbed. Due to its upholstered exterior and felt panels on the interior, BuzziNest Pod effectively dampens sound from every direction to create maximum peace and quiet for everyone in the office, whether you are working inside BuzziNest Pod or out.

BuzziNest Pod is also customizable with high-quality materials and furniture. Choose from a wide range of fabrics, frames, shelf and table finishes, seating options, and table heights. The mobile BuzziNest Pod can easily fit into an existing space and comes fully packaged with a top-of-the-line motion sensor fresh air ventilation system, automatic LED lighting system, main power outlet (120V), and two USB chargers (type A).

Design by BuzziSpace Studio

#### General

- BuzziNest Pod
- Structure: Laminated poplar plywood with visible trim Cover: Inside: Felt or Felt Printed
  - Outside: Fabric covered foam with Fabric or Trevira CS
- Flat Packed Installation time 2 hours, including unboxing

Optional Table Low | High with electrification BuzziNest Cube BuzziMilk Stool BuzziMilk Bar

#### Acoustics

...













Mid tone



Diffusion Attenuation

Low Tone

High tone

# Certifications




#### Content

Configurations	3	Finishes	9
Components	4	Dimensions	10
Fabrics	8	Acoustics	13

# Configurations

### **BuzziNest Pod**





¥

**BuzziNest Pod** 

Structure: Laminated poplar plywood with visible trim

Cover: Inside: Felt, Felt Printed Outside: Fabric covered foam with Fabric or Trevira CS

#### **Power:**

Mains supply: 120V AC 50-60Hz, max 15A Stand-by consumption: 1,2W Consumption when in use: 13,7W Supplied with a 118.1" power cable

#### Lighting unit:

Power usage: 14W Input: 120V AC 50-60Hz

Ŷ Lumen output: 1260 lumen Color Temperature: 4000K Color Rendering Index: >80

#### Ventilation unit:

Power usage: 5,76W



# Input: 12V dc

Airflow rate when occupied: 4.2 gal/sec Airflow rate after 5 min without occupancy: 2.1 gal/sec Airflow rate stand-by mode, after 15 min without occupancy: 0.5 gal/sec

Install	ed
Length:	240

cm | 94.5" X Height: 218 cm | 85.8" Width: 125 cm | 49.2"

2 palletized crates					
Crate 1					
Length:	222 cm	87.5 "			
Heigth:	144 cm	56.7 ″			
Width:	72 cm	28.3 ″			

460 kg | 1014 lbs

#### Crate 2

Length: 222 cm | 87.5 " Heigth: 144 cm | 56.7 " Width: 88 cm | 34.5 "

483 kg | 1065.8 lbs

590 kg | 1300 lbs

Optional Table Low | High with electrification

...

- **BuzziNest** Cube BuzziMilk Stool
- BuzziMilk Bar

Table socket: 120V AC 50-60Hz, max 14A Twin USB charger: type A, max 4A at 5VDC combined

**Output:** 

# Components

# Outside

The outside shell is available in Fabric, Trevira CS





Fabric

Trevira CS

## Inside

The inside cover is available in Felt or Felt Printed



Felt



Felt Printed

# **Floor Cover**

The floor cover is always in black carpet.



### Frame

Frame is available in Laminated plywood White, Black or Truffle Grey





Black



Truffle Grey

# **Door Handle**

Slim Handle



Ergonomic Handle (Optional)





Material: Oak with inlay in same color as frame

Optional alternative handle for better grip comfort and inclusiveness.

# Table Low | High including electrification (optional)

Table Low | High in Oak or Laminated plywood White, Black or Truffle Grey with visible trim. The table base is always in the same color as the frame.

Mains power outlet and 2 USB chargers (type A) max 5A at 5VDC combined.



|--|

2x USB Socket Socket

## Lighting



Integrated LED Light Power usage: 14W Input: 120V AC 50-60Hz Lumen output: 1260 lumen Color Temperature: 4000K Color Rendering Index: >80

#### Ventilation



For healthy air circulation there is a integrated ventilation. Cutout for sprinkler possible. (please reach out to customer service for instructions)

Power usage: 5,76W Input: 12V dc Airflow rate when occupied: 4.2 gal/sec Airflow rate after 5 min without occupancy: 2.1 gal/sec Airflow rate stand-by mode, after 15 min without occupancy: 0.5 gal/sec

### **Power Connection**

The BuzziNest is powered from the side. It can be powered with a regular pluggable IEC power cord or trough a hard wired connection towards the building power grid.



#### Wheels



The BuzziNest Pod is moveable by the 4 wheels underneath. Floor adjusters are integrated for leveling.

## BuzziNest Cube (optional)



BuzziNest Cubes, in combination with the low table, are the ideal elements to hold a comfortable meeting. See BuzziCube Flat for possible upholsteries. Wheight: 16,5 kg | 36.38 lbs

### BuzziMilk Stool (optional)



Combine BuzziMilk Stool with the low table to accommodate short meetings.

#### BuzziMilk Bar (optional)



BuzziMilk Bar stools pair perfectly with the high table.

# **Fabrics**

#### Felt



Composition 100% Recycled P.E.T. Felt, latex backing Weight 1.000 g/m2 | 29.49 oz/yd2 Abrasion resistance >7.000 Martindale Flammability EU: EN 13501.1 + A1/2009 Class B-s1,d0 USA: ASTM E84 Class A certified Fastness to light USA 5

### **Printed Felt**



Composition 100% Recycled P.E.T. Felt, latex backing Weight 1.000 g/m2 | 29.49 oz/yd2 Abrasion resistance >7.000 Martindale Flammability EU: EN 13501.1 + A1/2009 Class B-s1,d0 USA: ASTM E84 Class A certified Fastness to light USA 5



#### Fabric



Category A Composition 70% Recycled Wool, 25% Recycled Polyacryl, 5% Recycled Other Fabrics Weight 405 g/m² | 11.94 oz/yd² Abrasion resistance 40.000 Martindale, 50,000 Wyzenbeek Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette). EN 1021.2/2006 | BS EN 1021.2/2006 (match) USA: CAL TB 117 | ASTM E84 CLASS A Fastness to light EU: 4 | USA 4 Fastness to rubbing EU: Wet 3-4 | Dry 4-5 Fastness to crocking USA: Wet 5 | Dry 5



#### **Trevira CS**



Category A Weight 420 g/m<sup>2</sup> | 12.39 oz/yd<sup>2</sup> Composition 100% Polyester, Trevira CS Abrasion resistance 100.000 Martindale, 90,000 Wyzenbeek Flammability BS 5852 part II: CRIB 5 | BS 7176 Medium Hazard USA: CAL TB 117 | M1 | B1 | EN 1021/1-2 |C1 | IMO Res. A652 (16) Fastness to light EU: 6 | USA 5 Fastness to rubbing EU: Wet 4-5 | Dry 4-5 Fastness to crocking USA: Wet 5 | Dry 5 Category A Marcology Content of the second second

# Finishes

# Laminated Plywood with visible lining

Frame and table



## Wood


Door handle and table




Oak


# Dimensions

## **BuzziNest Pod**

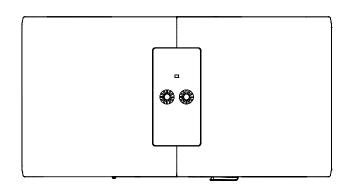


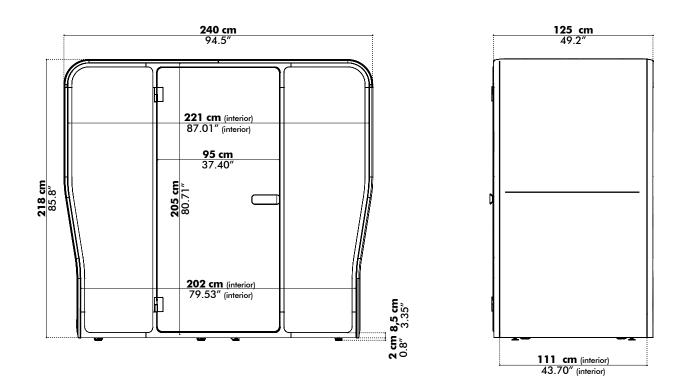


# **Table low**

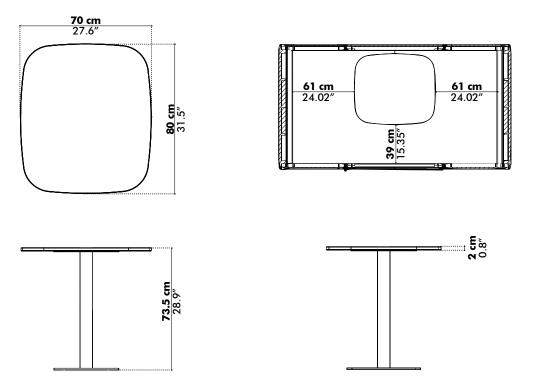


# Table High

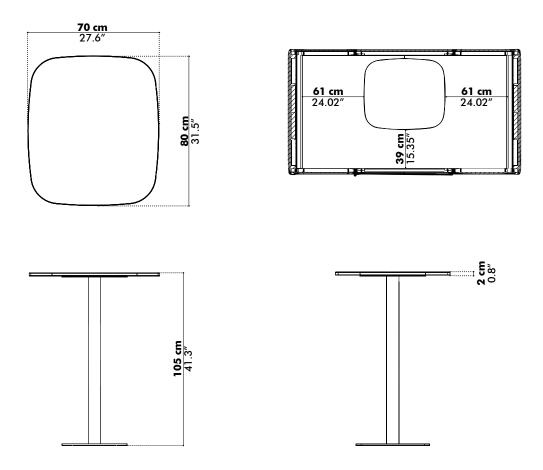

# **BuzziNest Cube**

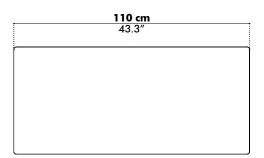

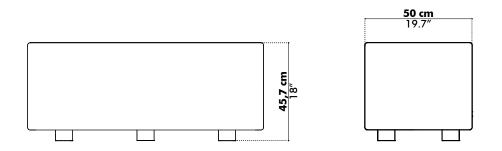

# Acoustics

## Sound blocker



a) Exterior: upholstered foam

b) Interior: acoustic Felt

c) Glass with acoustic foil

#### Peace and quiet inside

27dB sound reduction, a conversation is turned into an indistinguishable whisper.

#### **Acoustic Principles**



Max. absorption on the outside

Max. attenuation on the inside

#### High performer on all frequencies, especially speech frequencies




Low tones






# Speech Level Reduction\*

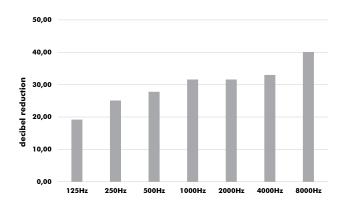

Hz	dB Left Seat	dB Right Seat
125	19.1	19.2
250	24.8	25.1
500	27.1	27.8
1000	31.0	31.6
2000	31.7	31.6
4000	30.8	33.0
8000	38.5	40.1

Rating According to ISO 23351-1:2020 Left Seat: Speech Level Reduction,  $D_{S,A} = 27.8 \text{ dB}$ Right Seat: Speech Level Reduction,  $D_{S,A} = 28.4 \text{ dB}$ 

# Equivalent sound absorption area in m<sup>2</sup> per object\*

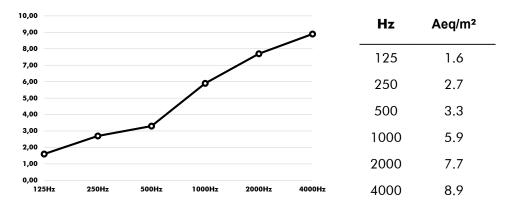

\*Full test report available on our website