



BuzziTile

Product Specification Sheet

This document contains technical
information about the BuzziTile



www.buzzi.space

Graphical acoustic wall element

The BuzziTile turns any blind wall into a must see. By using multiple Tiles and playing with different colours you create a highly graphical feature on the wall. Let your creativity do the work.

BuzziTile is offered in flat and different 3d pattern and can be finished off in different fabrics.

The BuzziTile family is a perfect solution for attenuating sound.

Design by Sas Adriaenssens

General



Flat | 3D

BuzziTile Square L | Square XL | Metro | Hexa | Penta | Triangle L | Triangle XL



Filling: acoustic foam

Cover: Fabric, Trevira CS, Reflect, Revive 1, Clara 2, Remix 3, Hero 2, Tonus 4, Arda, Memory 2

Acoustics



Absorption



Diffusion



Mid tone



High tone

Certifications



Content

Composition	3
Configurations	3
Patterns	5
Fabrics	9
Dimensions	12
Acoustics	16

Composition

Back in Felt Tape	Back in Wood Tape	Back in Wood Powermagnets
6 mm 0.24" BuzziFelt acoustic foam layer of fabric self adhesive tape at the back	6 mm 0.24" MDF acoustic foam layer of fabric self adhesive tape at the back	6 mm 0.24" MDF acoustic foam layer of fabric powermagnets


Note

Be sure wall surface is free of dirt, grease or any special paint finishes that could prevent the adhesive from adhering to wall surface.


Due to possible variation in dimension and density, we advise to install the tiles with felt backing at 0,5 mm - 1 cm | 0.20" - 0.39" distance from each other. For more precise applications, tiles with wooden back are advisable.

Configurations

BuzziTile Square L | XL

		Flat L: 3D: 1SQ, 4SQ, 25SQ, Arrow, Bee, Dune, Frost, Leaf, Radial, Rib, Spike, Waffle XL: 3D: 4SQ, 16SQ, Arrow, Bee, Dune, Frost, Leaf, Radial, Rib, Spike, Waffle
		Fabrics: Fabric, Trevira CS, Reflect, Revive 1, Clara 2, Remix 3, Hero 2, Tonus 4, Arda, Memory 2
		L: H 60 cm W 60 cm H 23.62" W 23.62" XL: H 120 cm W 120 cm H 47.24" W 47.24"
		L: back in felt: ± 1kg ± 2.20 lbs back in wood: ± 2 kg ± 4.41 lbs XL: back in felt: ± 3,5 kg ± 6.61 lbs back in wood: ± 8 kg ± 17.64 lbs
		Flat: - back in wood no stitch self adhesive tape or powermagnets 3D: - back in felt: with or without stitch + self adhesive tape (no stitch for Radial Waffle Leaf Bee) - back in wood: no stitch + self adhesive tape or no stitch + powermagnets

BuzziTile Metro

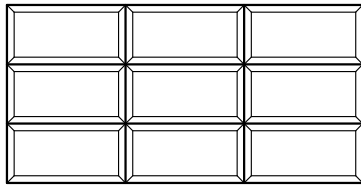

Flat
3D: Metro



Fabrics: Fabric, Trevira CS, Reflect, Revive 1, Clara 2, Remix 3, Hero 2, Tonus 4, Arda, Memory 2



H 40 cm W 80 cm
H 15.75" W 31.50"




Back in felt: ± 1 kg | ± 2.20 lbs
Back in wood: ± 2 kg | ± 4.41 lbs



3D: - back in felt: with or without stitch + self adhesive tape
- back in wood: no stitch + self adhesive tape or
no stitch + powermagnets

BuzziTile Hexa

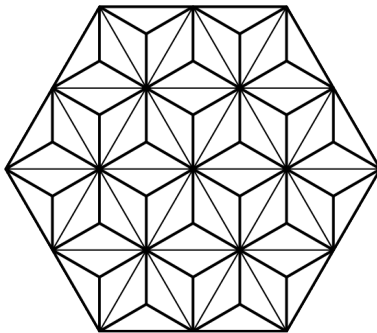

3D: Bee | Frost | Spike | Why



Fabrics: Fabric, Trevira CS, Reflect, Revive 1, Clara 2, Remix 3, Hero 2, Tonus 4, Arda, Memory 2



H 60 cm W 69,3 cm
H 23.62" W 27.28"




Back in felt: ± 0,75 kg | ± 1.65 lbs
Back in wood: ± 1,75 kg | ± 3.86 lbs



3D: - back in felt: no stitch + self adhesive tape
- back in wood: no stitch + self adhesive tape or
no stitch + powermagnets

BuzziTile Penta

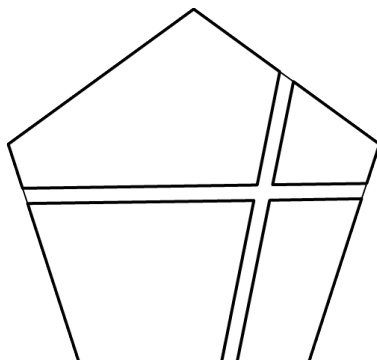

3D: Kite



Fabrics: Fabric, Trevira CS, Reflect, Revive 1, Clara 2, Remix 3, Hero 2, Tonus 4, Arda, Memory 2



H 60 cm W 63 cm
H 23.62" W 24.80"




Back in felt: ± 0,70 kg | ± 1.54 lbs
Back in wood: ± 1,50 kg | ± 3.31 lbs



3D: - back in felt: no stitch + self adhesive tape
- back in wood: no stitch + self adhesive tape or
no stitch + powermagnets

BuzziTile Triangle L | XL

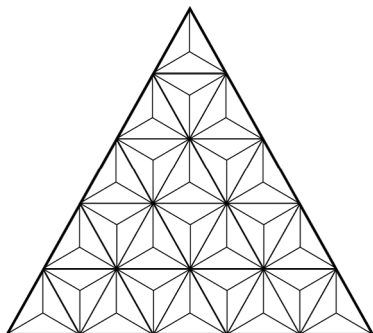

Flat
3D: Spike

Fabrics: Fabric, Trevira CS, Reflect, Revive 1, Clara 2, Remix 3, Hero 2, Tonus 4, Arda, Memory 2

L: H 52 cm W 60 cm
H 20.47" W 23.62"
XL: H 104 cm W 120 cm
H 40.94" W 47.24"

L: Back in felt: ± 0,5kg | ± 1.10 lbs
Back in wood: ± 1 kg | ± 2.20 lbs
XL: Back in felt: ± 1,5kg | ± 3.31 lbs
Back in wood: ± 4 kg | ± 8.82 lbs


Flat: - back in wood | no stitch | self adhesive tape or powermagnets
3D: - back in felt: no stitch + self adhesive tape
... - back in wood: no stitch + self adhesive tape or
no stitch + powermagnets

Patterns

BuzziTile Square L


Flat

H 60 cm W 60 cm
H 23.62" W 23.62"




1SQ

H 60 cm W 60 cm
H 23.62" W 23.62"




4SQ

H 60 cm W 60 cm
H 23.62" W 23.62"




25SQ

H 60 cm W 60 cm
H 23.62" W 23.62"




Arrow

H 60 cm W 60 cm
H 23.62" W 23.62"




Bee

H 60 cm W 60 cm
H 23.62" W 23.62"




Dune

H 60 cm W 60 cm
H 23.62" W 23.62"




Frost

H 60 cm W 60 cm
H 23.62" W 23.62"




Leaf

H 60 cm W 60 cm
H 23.62" W 23.62"




Radial

H 60 cm W 60 cm
H 23.62" W 23.62"




Rib

H 60 cm W 60 cm
H 23.62" W 23.62"




Spike

H 60 cm W 60 cm
H 23.62" W 23.62"



Waffle


H 60 cm W 60 cm
H 23.62" W 23.62"



BuzziTile Square XL


Flat

H 120 cm W 120 cm
H 47.24" W 47.24"




4SQ

H 120 cm W 120 cm
H 47.24" W 47.24"

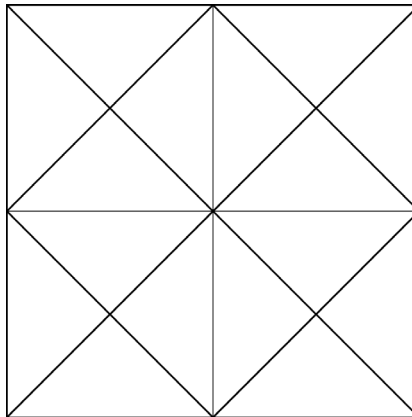


16SQ

H 120 cm W 120 cm
H 47.24" W 47.24"

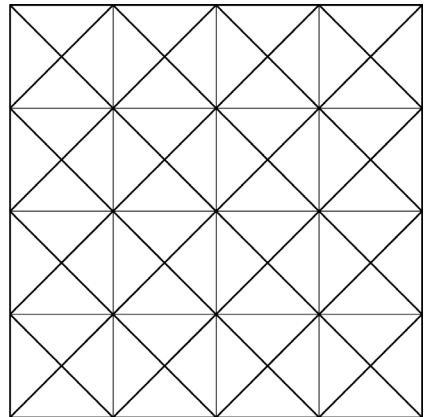


Arrow

H 120 cm W 120 cm
H 47.24" W 47.24"

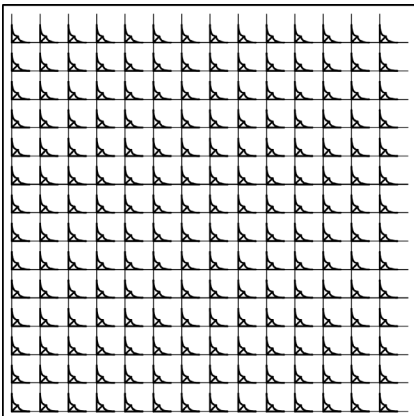


Bee

H 120 cm W 120 cm
H 47.24" W 47.24"

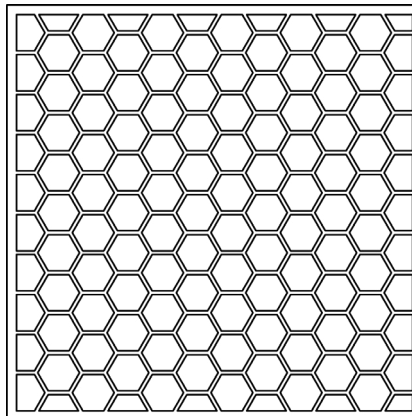


Dune

H 120 cm W 120 cm
H 47.24" W 47.24"

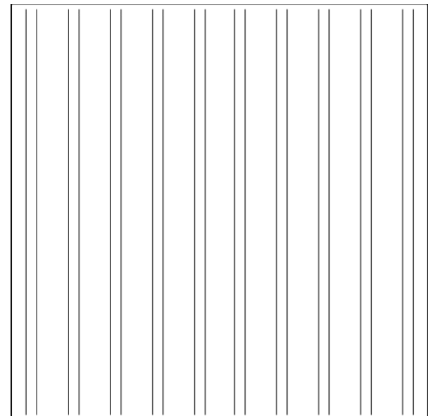


Frost

H 120 cm W 120 cm
H 47.24" W 47.24"

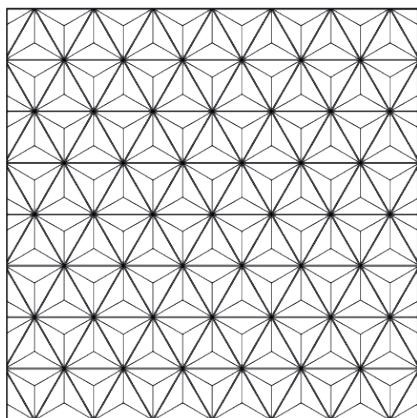


Leaf

H 120 cm W 120 cm
H 47.24" W 47.24"

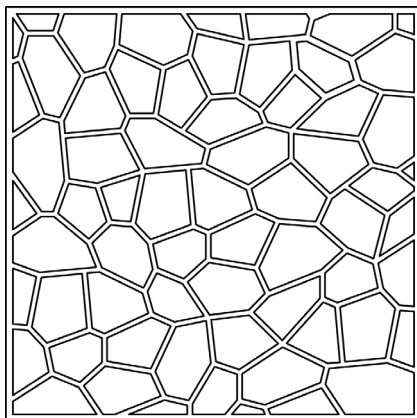


Radial

H 120 cm W 120 cm
H 47.24" W 47.24"

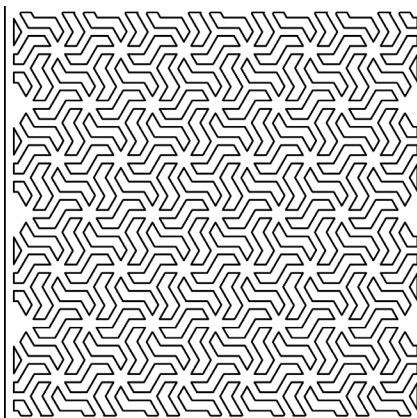


Rib

H 120 cm W 120 cm
H 47.24" W 47.24"

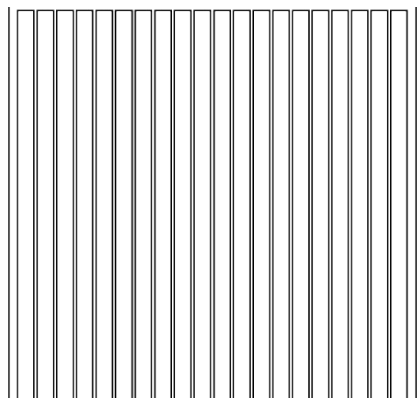


Spike

H 120 cm W 120 cm
H 47.24" W 47.24"

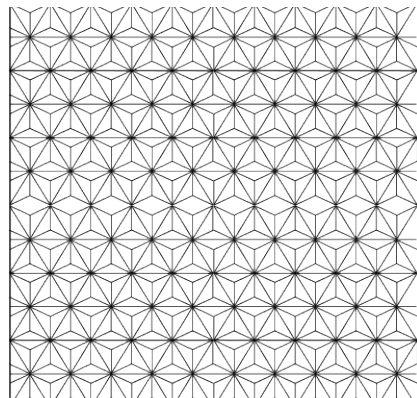

Waffle

H 120 cm W 120 cm
H 47.24" W 47.24"

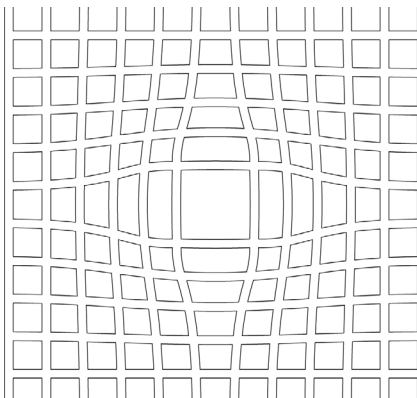

BuzziTile Metro


Flat

H 40 cm W 80 cm
H 15.75" W 31.50"



3D Metro


H 40 cm W 80 cm
H 15.75" W 31.50"

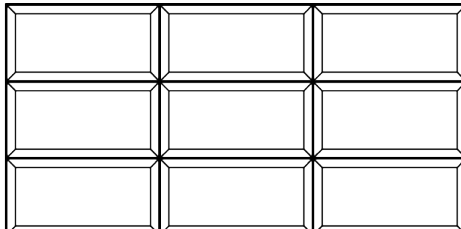

BuzziTile Hexa


Bee

H 60 cm W 69,3 cm
H 23.62" W 27.28"




Frost

H 60 cm W 69,3 cm
H 23.62" W 27.28"




Spike

H 60 cm W 69,3 cm
H 23.62" W 27.28"



Why


H 60 cm W 69,3 cm
H 23.62" W 27.28"



BuzziTile Penta

Kite


H 60 cm W 63 cm
H 23.62" W 24.80"



BuzziTile Triangle L | XL


Flat

W 60 cm H 52 cm
W 23.62" H 20.47"




Spike

W 60 cm H 52 cm
W 23,62" H 20.47"




Flat

W 120 cm H 104 cm
W 47.24 H 40.94"




Spike

W 120 cm H 104 cm
W 47.24 H 40.94"



Fabrics

Fabric (45 colors)



Category A

Composition 70% Recycled Wool, 25% Recycled Polyacryl,
5% Recycled Other Fabrics

Weight 405 g/m² | 11.94 oz/yd²

Abrasion resistance 40.000 Martindale, 50,000 Wyzenbeek

Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette).
EN 1021.2/2006 | BS EN 1021.2/2006 (match)
USA: CAL TB 117 | ASTM E84 CLASS A


Fastness to light EU: 4 | USA 4

Fastness to rubbing EU: Wet 3-4 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Trevira CS (47 colors)



Category A

Weight 420 g/m² | 12.39 oz/yd²

Composition 100% Polyester, Trevira CS

Abrasion resistance 100.000 Martindale, 90,000 Wyzenbeek

Flammability BS 5852 part II: CRIB 5 | BS 7176 Medium Hazard
USA: CAL TB 117 | M1 | B1 | EN 1021/1-2 | C1 |
IMO Res. A652 (16)


Fastness to light EU: 6 | USA 5

Fastness to rubbing EU: Wet 4-5 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Reflect (34 colors)



Category A

Weight 430 g/m² | 13.78 oz/yd²

Composition 100% Post-consumer recycled polyester

Abrasion resistance 100.000 Martindale

Flammability AS/NZS 3837 class 1 | ASTM E84 Class A Unadhered

ASTM E84 Class B Adhered | BS 5852 crib 5 with treatment

BS 5852 part 1 with treatment | EN 1021-1/2 | US Cal. Bull. 117-2013

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing EU: Wet 5-5 | Dry 5-5


Pilling Note 4, EN ISO 12945



kvadrat

Revive 1 (25 colors)

kvadrat



Category A

Composition 100% recycled polyester FR

Weight 430 g/lin.m

Abrasion resistance 60.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1
UNI 9175 1IM | US Cal. Tech. Bull. 117
IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 5, wet 4-5

Pilling Note 4-5, EN ISO 12945



Clara 2 (24 colors)

kvadrat



Category B

Composition 92% new wool, 8% nylon

Weight 400 g/lin.m

Abrasion resistance 80.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852, ignition source 2-3 | DIN 4102 B2
NF D 60 013 | UNI 9175 1IM | US Cal. Tech. Bull. 117, Sec. E
NFPA 260 | IMO A.652(16)

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 4, EN ISO 12945



Remix 3 (73 colors)

kvadrat



Category B

Composition 90% new wool, 10% nylon

Weight 415 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1
Önorm B1/Q1 | NF D 60 013 | UNI 9175, 1IM
AS/NZS 1530.3 | Cal. Tech. Bull. 117-2013
NFPA 260 | IMO FTP Code 2010:Part 8

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 4, EN ISO 12945



Hero 2 (33 colors)

kvadrat



Category C

Composition 97% new wool, 3% nylon

Weight 580 g/lin.m

Abrasion resistance 45.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B2 | NF D 60 013
UNI 9175 1IM | US Cal. Bull. 117-2013 | NFPA 260
IMO A.652 (16)

Fastness to light Note 5-6, ISO 105-B02


Fastness to rubbing (ISO) dry 4-5, wet 4-5

Pilling Note 3-4, EN ISO 12945



Tonus 4 (47 colors)

kvadrat



Category D

Composition 90% new wool, 10% Helanca

Weight 665 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1 | DIN 4102 B2

Önorm B1/Q1 | NF D 60 013 | UNI 9175 11M

US Cal. Bull. 117-2013 | NFPA 260 | IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 3-5, wet 3-5

Pilling Note 3, EN ISO 12945



Arda (12 colors)

kvadrat



Category E

Composition 70% new wool 21% polyester 9% nylon

Weight 800 g/lin. m | 25.8 oz/ly

Abrasion resistance

Approx. 50.000 Martindale rubs, EN ISO 12947

Flammability ASTM E84 Class A Unadhered | AS/NZS 3837 class 2 | BS 5852 part 1

BS 5852 crib 5 | DIN 4102 B2 | EN 1021-1/2 | IMO FTP Code 2010 Part 8

UNI 9175 11M | US Cal. Bull. 117-2013

Fastness to light Note 5-8, ISO 105-B02

Fastness to rubbing Dry note 3-5 ISO 105-X12


Wet note 3-5 ISO 105-X12

Pilling Note 4, EN ISO 12945



Memory 2 (20 colors)

kvadrat



Category E

Composition 100% Trevira CS

Weight 700 g/lin.m

Abrasion resistance

35.000 rubs acc. to the Martindale method, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1

NF D 60 013 | NF P 92 507 M1 | UNI 9175 11M

UNI 9177 classe 1 | US Cal. Tech. Bull. 117

IMO A.652 (16)

Fastness to light Note 5-8, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4-5


Pilling Note 4, EN ISO 12945




Dimensions

BuzziTile Square L


Front




Thickness

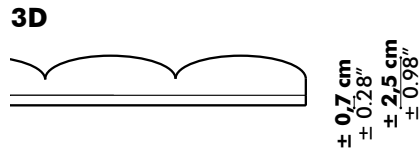


Flat




Back with powermagnets



Positive | negative magnet location




Back with self adhesive tape




BuzziTile Square XL


Front




Thickness

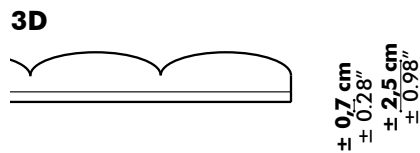


Flat




Back with powermagnets



Positive | negative magnet location




Back with self adhesive tape




BuzziTile Metro


Front

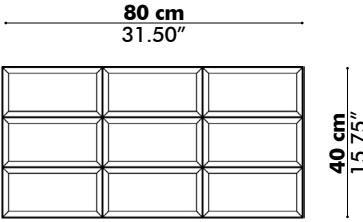


Thickness



Back with powermagnets



Positive | negative magnet location




Back with self adhesive tape




BuzziTile Hexa


Front




Thickness



Back with powermagnets



Positive negative magnet location




Back with self adhesive tape




BuzziTile Penta


Front




Thickness




Back with powermagnets



Positive negative magnet location




Back with self adhesive tape



BuzziTile Triangle L

Front




Thickness

3D




± 0.7 cm
 ± 0.28 "
 ± 2.5 cm
 ± 0.98 "

Flat




± 0.7 cm
 ± 0.28 "
 ± 3 cm
 ± 1.18 "


Back with powermagnets



Positive negative magnet location




Back with self adhesive tape



BuzziTile Triangle XL

Front




Thickness

3D




± 0.7 cm
 ± 0.28 "
 ± 2.5 cm
 ± 0.98 "

Flat




± 0.7 cm
 ± 0.28 "
 ± 3 cm
 ± 1.18 "


Back with powermagnets

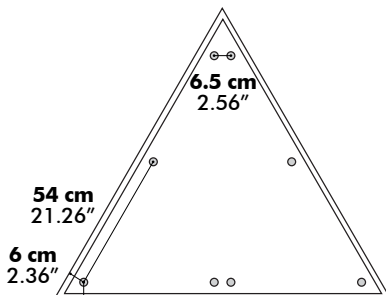

Positive negative magnet location




Back with self adhesive tape



Acoustics

BuzziTile

Absorption coefficient

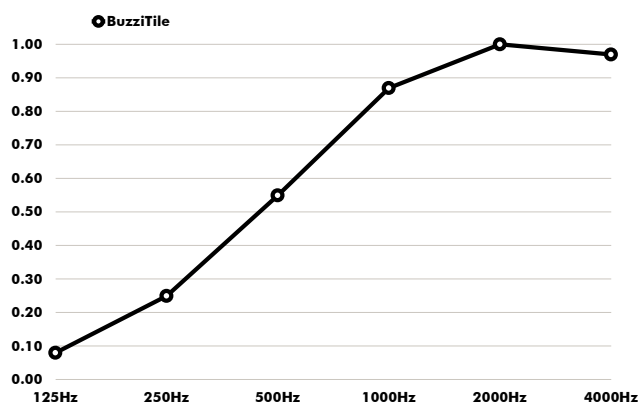

Hz	α^s
125	0.08
250	0.25
500	0.55
1000	0.87
2000	1.04
4000	0.97

Absorption values

α_w **0.55**
(ISO 11654)

NRC **0.70**
(ASTM - C423)

SAA **0.68**
(ASTM-C423)

Class **D**
(ISO 11654)

Glossary

All calculations are based on accredited lab measurements, official document available on www.Buzzi.Space

Definitions

α	Weighted absorption coefficient	(ISO 11654)
NRC	Noise reduction coefficient	(ASTM - C423)
SAA	Sound absorption average	(ASTM - C423)

Classification of sound absorbers NEN-EN-ISO 11654

A	0.90 0.95 1.0
B	0.80 0.85
C	0.60 0.65 0.70 0.75
D	0.03 0.55
E	0.15 0.25