



BuzziDesk FlipFlop

Product Specification Sheet

This document contains technical information about the BuzziDesk Flip Flop



www.buzzi.space

Free standing desk divider screen

These movable and foldable acoustic screens have been designed in order to instantly define a quieter and more personal space on any desktop. They can be conveniently stored against a wall in a flat manner since their side flaps are fully movable. They can be used in a more or less closed manner depending on how protected one wants to be, but can also be set in a zig-zag manner on a table top. They were originally designed to be used on the multifunctional BuzziPicNic table (with two small extra slides that fit perfectly in its central opening), but they can be used on any table top to define a specific area when needed.

Design by Alain Gilles

General



Desk FlipFlop

Core: honeycomb cardboard



Profile: metal

Cover: Fabric, Trevira CS, Reflect, Revive 1, Clara 2, Remix 3, Hero 2, Tonus 4, Arda, Memory 2



Min. W 117,5 cm	H 35 cm	D 3,5 cm
W 46.26"	H 13.78"	D 1.38"
Max. W 300 cm	H 50 cm	D 3,5 cm
W 118.11"	H 19.69"	D 1.38"



Dry Use



Flat Packed



Sliders for BuzziPicNic Desk, Meet, WorkBench
FixWall (optional)

Certifications



Acoustics



Absorption



Diffusion



Attenuation



Mid tone




High tone

Content

Configurations	3	Dimensions	8
Components	4	Acoustics	10
Fabrics	5		

Configuration

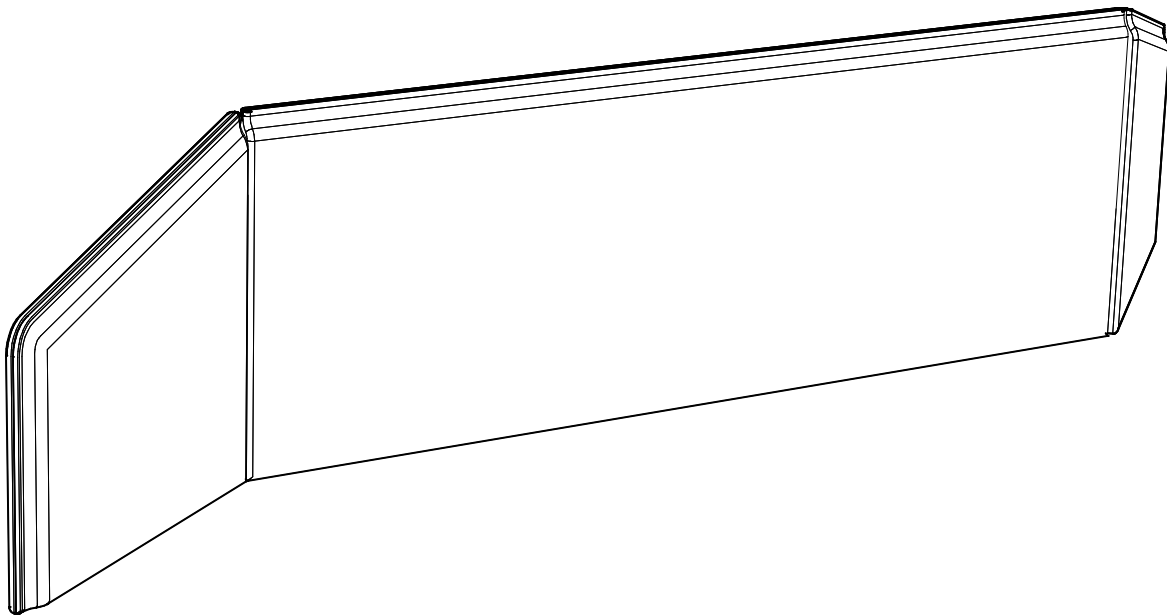

Core: honeycomb cardboard
 Profile: metal
 Cover: Fabric, Trevira CS, Reflect, Revive 1, Clara 2, Remix 3, Hero 2, Tonus 4, Arda, Memory 2



Min. W 117,5 cm H 35 cm D 3,5 cm
 W 46.26" H 13.78" D 1.38"
 Max. W 300 cm H 50 cm D 3,5 cm
 W 118.11" H 19.69" D 1.38"




Length	Side panel: 37.5 cm 14.76" Height panel: 35 cm 13.78"	Side panel: 50 cm 19.69" Height panel: 35 cm 13.78"	Side panel: 37.5 cm 14.76" Height panel: 50 cm 19.69"	Side panel: 50 cm 19.69" Height panel: 50 cm 19.69"
80 cm 31.50"	3.2 kg 7.05 lbs	3.4 kg 7.50 lbs	4 kg 8.82 lbs	4.5 kg 9.92 lbs
100 cm 39.37"	3.5 kg 7.72 lbs	3.7 kg 8.16 lbs	4.6 kg 10.14 lbs	5.1 kg 11.24 lbs
120 cm 47.24"	3.9 kg 8.60 lbs	4.1 kg 9.04 lbs	5.1 kg 11.24 lbs	5.5 kg 12.13 lbs
140 cm 55.12"	4.2 kg 9.26 lbs	4.5 kg 9.92 lbs	5.6 kg 12.35 lbs	6 kg 13.23 lbs
160 cm 62.99"	4.8 kg 10.58 lbs	5 kg 11.00 lbs	6.1 kg 13.45 lbs	6.6 kg 14.55 lbs
180 cm 70.87"	5.1 kg 11.24 lbs	5.4 kg 11.90 lbs	6.7 kg 14.77 lbs	7 kg 15.43 lbs
200 cm 78.74"	5.6 kg 12.35 lbs	5.8 kg 12.78 lbs	7.3 kg 16.09 lbs	7.6 kg 16.76 lbs




Sliders for BuzziPicNic Desk, Meet, Workbench
 FixWall (optional)

Components


Slider

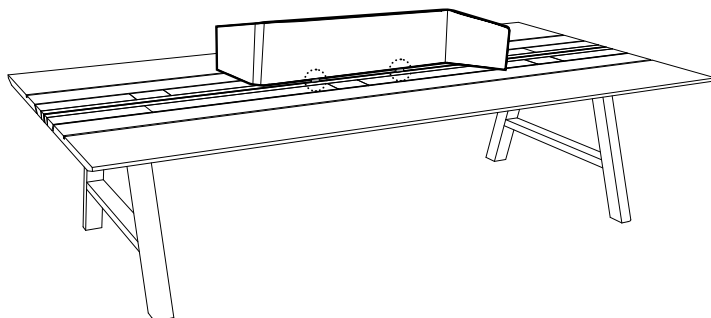



Combine BuzziDesk FlipFlop with BuzziPicNic Desk, Meet, WorkBench: screw the 2 sliders into the BuzziDeskFlipFlop and put them into the BuzziPicNic-ridge.
(2 pieces)



FixWall (optional)




Store all your BuzziDesk FlipFlops convenient on the wall with the BuzziFix FlipFlop. (min. 2 pieces required)
Powder coated metal in Black (9005) or White (9010)

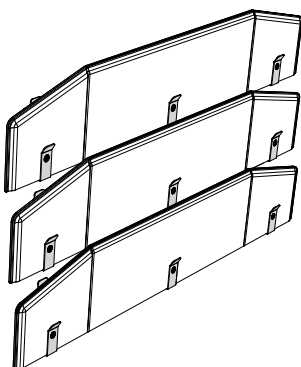

Fabrics

Fabric (45 colors)



Category A

Composition 70% Recycled Wool, 25% Recycled Polyacryl,
5% Recycled Other Fabrics

Weight 405 g/m² | 11.94 oz/yd²

Abrasion resistance 40.000 Martindale, 50,000 Wyzenbeek

Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette).
EN 1021.2/2006 | BS EN 1021.2/2006 (match)
USA: CAL TB 117 | ASTM E84 CLASS A


Fastness to light EU: 4 | USA 4

Fastness to rubbing EU: Wet 3-4 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Trevira CS (47 colors)



Category A

Weight 420 g/m² | 12.39 oz/yd²

Composition 100% Polyester, Trevira CS

Abrasion resistance 100.000 Martindale, 90,000 Wyzenbeek

Flammability BS 5852 part II: CRIB 5 | BS 7176 Medium Hazard
USA: CAL TB 117 | M1 | B1 | EN 1021/1-2 | C1 |
IMO Res. A652 (16)


Fastness to light EU: 6 | USA 5

Fastness to rubbing EU: Wet 4-5 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Reflect (34 colors)



Category A

Weight 430 g/m² | 13.78 oz/yd²

Composition 100% Post-consumer recycled polyester

Abrasion resistance 100.000 Martindale

Flammability AS/NZS 3837 class 1 | ASTM E84 Class A Unadhered
ASTM E84 Class B Adhered | BS 5852 crib 5 with treatment
BS 5852 part 1 with treatment | EN 1021-1/2 | US Cal. Bull. 117-2013

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing EU: Wet 5-5 | Dry 5-5


Pilling Note 4, EN ISO 12945



kvadrat

Revive 1 (25 colors)

kvadrat



Category A

Composition 100% recycled polyester FR

Weight 430 g/lin.m

Abrasion resistance 60.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1

UNI 9175 1IM | US Cal. Tech. Bull. 117

IMO A.652 (16)


Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 5, wet 4-5

Pilling Note 4-5, EN ISO 12945



Velvet (12 colors)



Category B

Composition 100% PES

Weight 375 g/m² | 11.06 oz/yd²

Abrasion resistance > 100.000 Martindale


Fastness to light EU: 4-5

Fastness to rubbing EU: Wet 4 | Dry 4-5

Pilling EU: 4-5

Clara 2 (24 colors)

kvadrat



Category B

Composition 92% new wool, 8% nylon

Weight 400 g/lin.m

Abrasion resistance 80.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852, ignition source 2-3 | DIN 4102 B2

NF D 60 013 | UNI 9175 1IM | US Cal. Tech. Bull. 117, Sec. E

NFPA 260 | IMO A.652(16)

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 4, EN ISO 12945



Remix 3 (73 colors)

kvadrat



Category B

Composition 90% new wool, 10% nylon

Weight 415 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1

Önorm B1/Q1 | NF D 60 013 | UNI 9175, 1IM

AS/NZS 1530.3 | Cal. Tech. Bull. 117-2013

NFPA 260 | IMO FTP Code 2010:Part 8

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 4, EN ISO 12945



Hero 2 (33 colors)

kvadrat



Category C

Composition 97% new wool, 3% nylon

Weight 580 g/lin.m

Abrasion resistance 45.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B2 | NF D 60 013

UNI 9175 1IM | US Cal. Bull. 117-2013 | NFPA 260

IMO A.652 (16)

Fastness to light Note 5-6, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4-5

Pilling Note 3-4, EN ISO 12945



Tonus 4 (47 colors)

kvadrat



Category D

Composition 90% new wool, 10% Helanca

Weight 665 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1 | DIN 4102 B2

Önorm B1/Q1 | NF D 60 013 | UNI 9175 1IM

US Cal. Bull. 117-2013 | NFPA 260 | IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 3-5, wet 3-5

Pilling Note 3, EN ISO 12945



Arda (12 colors)

kvadrat



Category E

Composition 70% new wool 21% polyester 9% nylon

Weight 800 g/lin. m | 25.8 oz/ly

Abrasion resistance

Approx. 50.000 Martindale rubs, EN ISO 12947

Flammability ASTM E84 Class A Unadhered | AS/NZS 3837 class 2 | BS 5852 part 1

BS 5852 crib 5 | DIN 4102 B2 | EN 1021-1/2 | IMO FTP Code 2010 Part 8

UNI 9175 1IM | US Cal. Bull. 117-2013

Fastness to light Note 5-8, ISO 105-B02

Fastness to rubbing Dry note 3-5 ISO 105-X12


Wet note 3-5 ISO 105-X12

Pilling Note 4, EN ISO 12945



Memory 2 (20 colors)

kvadrat




Category E
Composition 100% Trevira CS
Weight 700 g/lin.m
Abrasion resistance
35.000 rubs acc. to the Martindale method, EN ISO 12947
Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1
NF D 60 013 | NF P 92 507 M1 | UNI 9175 1IM
UNI 9177 classe 1 | US Cal. Tech. Bull. 117
IMO A.652 (16)
Fastness to light Note 5-8, ISO 105-B02
Fastness to rubbing (ISO) dry 4-5, wet 4-5
Pilling Note 4, EN ISO 12945




Dimensions

Desk FlipFlop

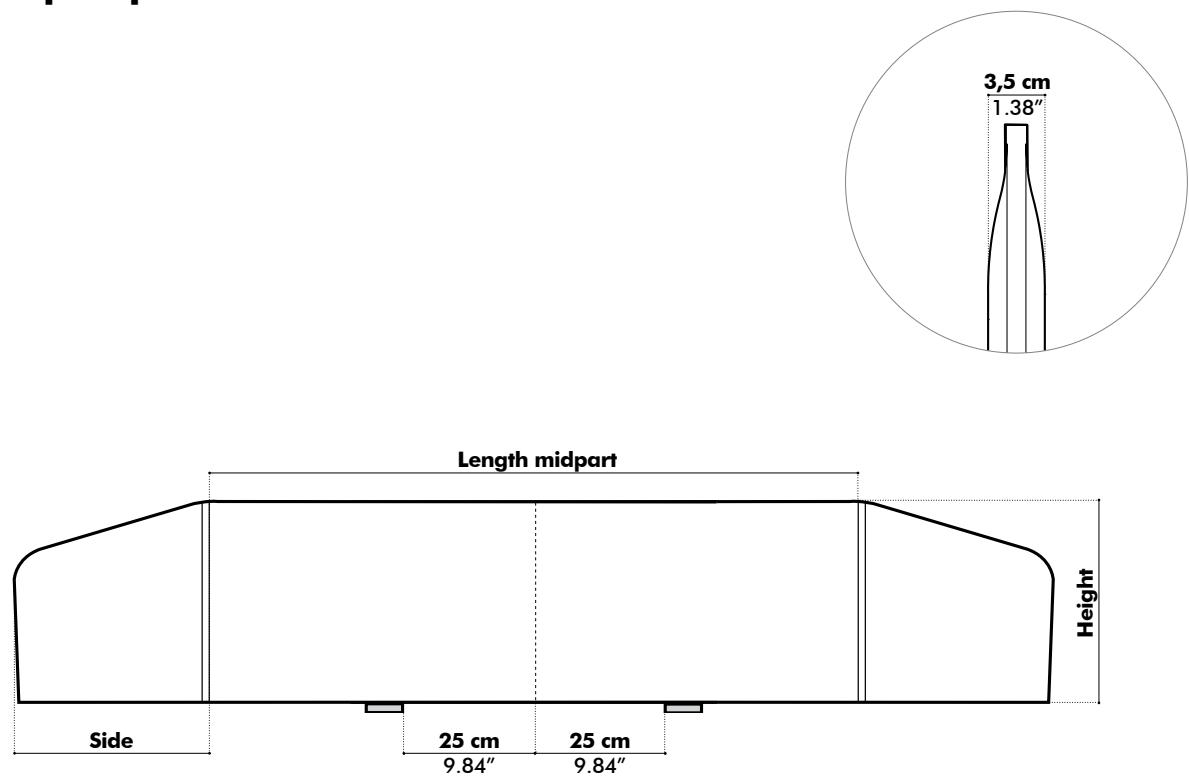


Height		Side		Length midpart	
35 cm	13.78"	37,5 cm	14.76"	80 cm	31.50"
50 cm	19.69"	50 cm	19.69"	100 cm	39.37"
				120 cm	47.24"
				140 cm	55.12"
				160 cm	62.99"
				180 cm	70.87"
				200 cm	78.74"

Sliders

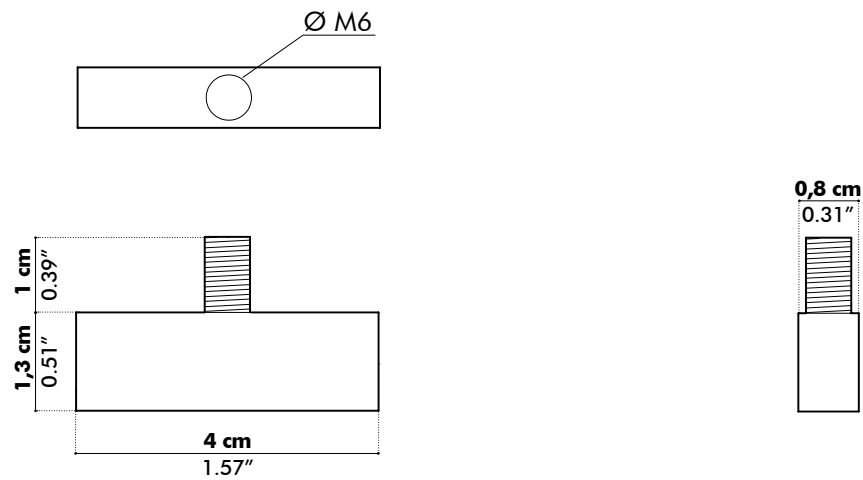


FixWall

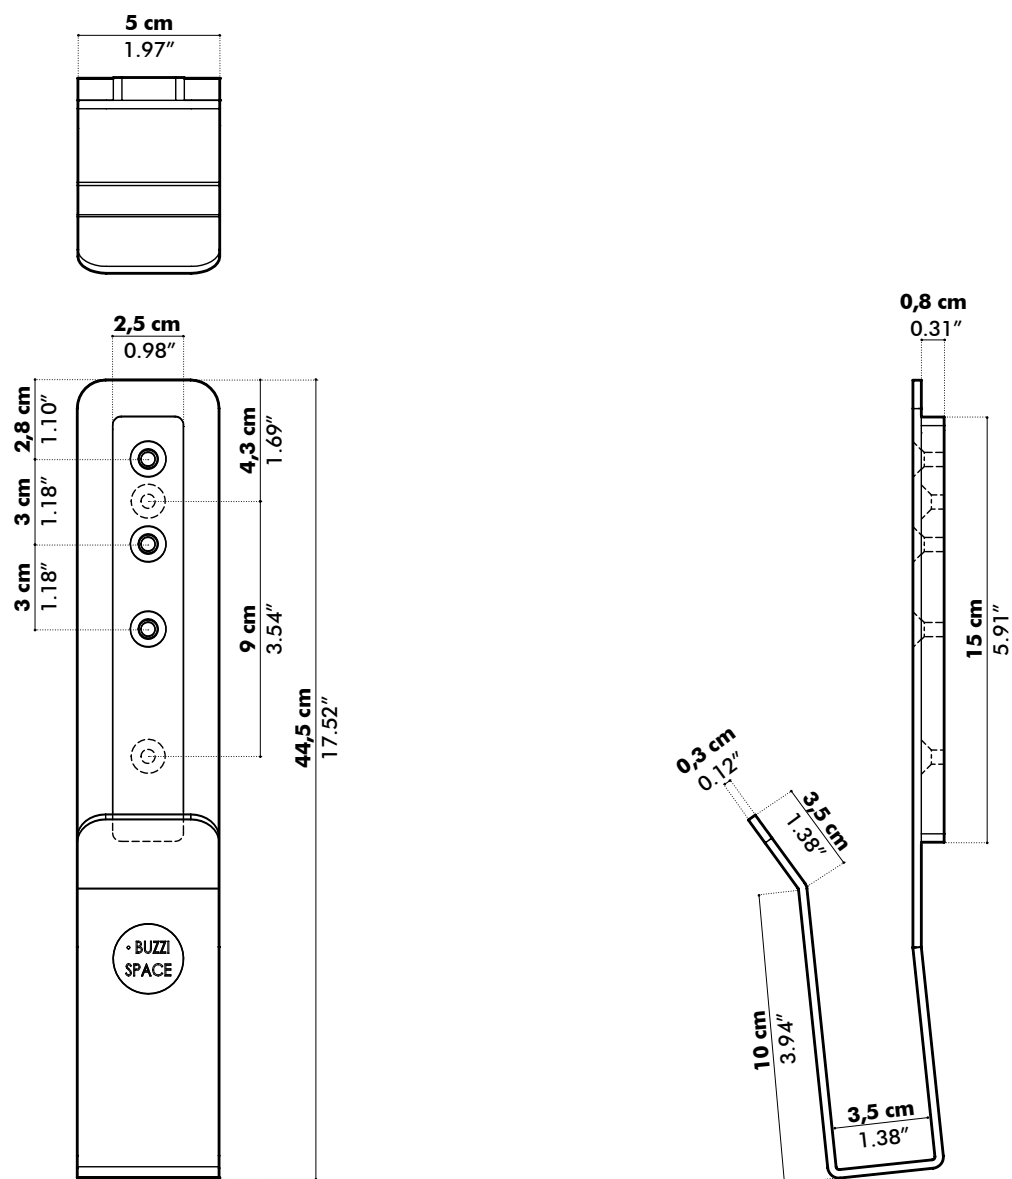

Acoustics

BuzziDesk FlipFlop

Equivalent sound absorption area in m² per object

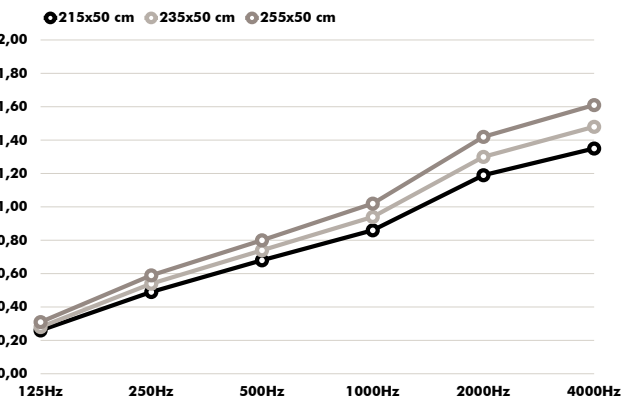

Hz	215x50 cm Aeq/m²	235x50 cm Aeq/m²	255x50 cm Aeq/m²
125	0.26	0.28	0.31
250	0.49	0.54	0.59
500	0.68	0.74	0.80
1000	0.86	0.94	1.02
2000	1.19	1.30	1.42
4000	1.35	1.48	1.61