




Product Specification Sheet

BuzziTrom EU

— By BuzziSpace Studio

Functional lighting with acoustic power

BuzziTrom is the first functional acoustic lighting solution crafted from a dual layer of felt that works on speech and high-tones. Along with an integrated LED disk, this acoustic lighting pendant houses an enclosed 4 cm air cavity that ensures maximum acoustic performance. Its cylindrical design traps sound waves within the radius of its frame; meanwhile, the exterior helps to diffuse sound energy.



The Family

Sizes




BuzziTrom S

BuzziTrom M

BuzziTrom L

Lighting Unit

**LED Disk
Ø 470**

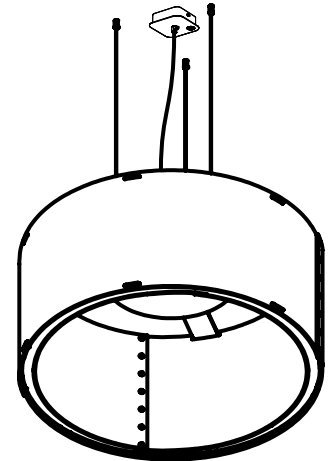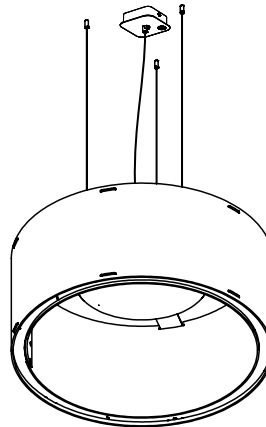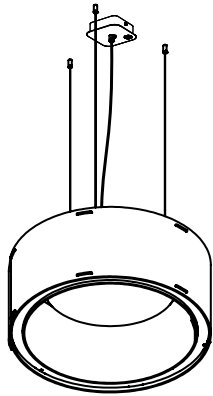


Required order information

1. Size
2. BuzziFelt Color
3. Mounting Option
4. Option

Lighting Data

Lighting Unit

LED Disk Ø 470

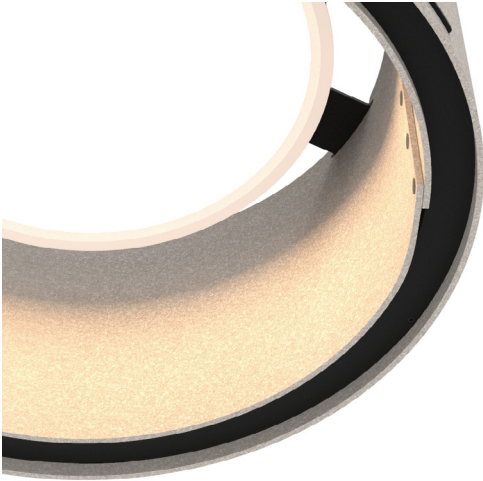

The PMMA diffuser ensures an optimal light spread and efficiency. It creates a very diffuse light surface without any dottiness. The light source of the BuzziTrom is a LED PCB, containing 36 low power LED's.

On Request: UGR 19

To achieve a UGR 19, the product is fitted with a Prismatic diffuser instead of a milky diffuser. LED dots will be visible.

BuzziTrom Lighting options

BuzziTrom S | M | L

Lighting Options			Characteristics		Mounting
Voltage Input	Color Temperature	UGR (Diffuser type)	Dimming	Technical	Options
230V	3000K	22 (milky)	1-10V Dali	Power consumption: 29W Light output: 2545 Lm Efficacy: 88 Lm/W CRI: > 90	Black ceiling canopy and black power cable White ceiling canopy and white power cable
		19 (prismatic)*	1-10V	Power consumption: 29W Light output: 2545 Lm Efficacy: 88 Lm/W CRI: > 90	
	4000K	22 (milky)	1-10V Dali	Power consumption: 29W Light output: 2545 Lm Efficacy: 88 Lm/W CRI: > 90	




CECB

* To achieve a UGR 19, the product is fitted with a Prismatic diffuser instead of a milky diffuser. LED dots will be visible.


Photometric Data

BuzziTrom S | M | L LED Disk Ø 470

LED Disk Ø 470 Cartesian diagram

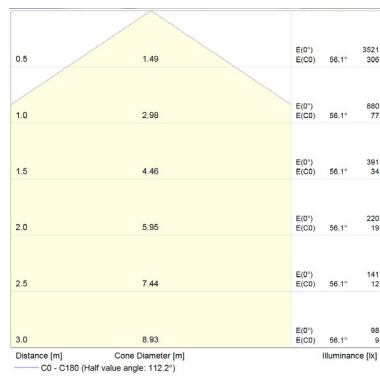





LED Disk Ø 470 Polar curve

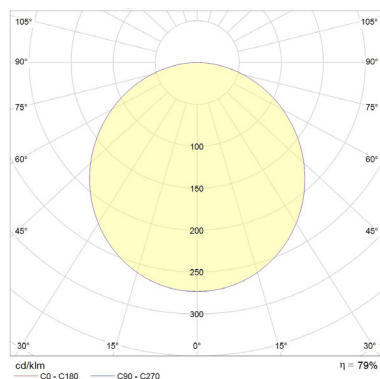

Tips and Tricks - Light Options

To enlight your workplace with optimal lux levels take following measurements into account:

BuzziTrom S | M | L LED Disk Ø 470

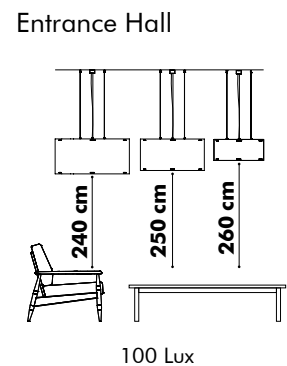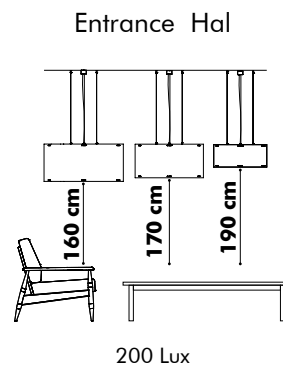
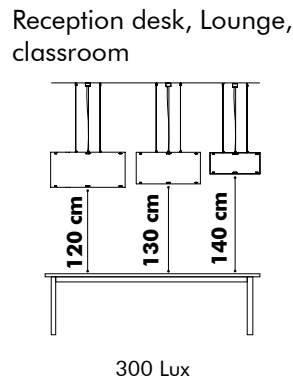
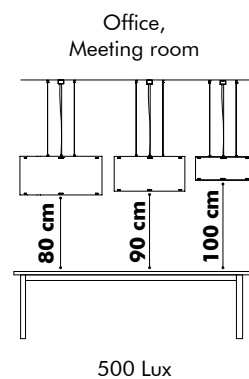


* According to EN12464

Product Data



Fixing System

Ceiling Suspended Split

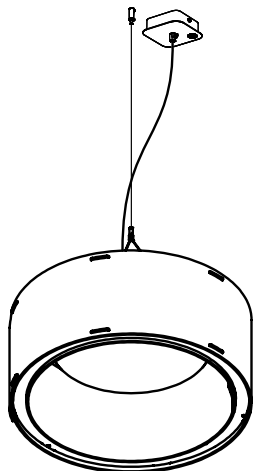

Ceiling Suspended Split
Fixing System Screw with 3 split cables and 1 main cable, total length of 2 m or 5 m (black or alu)
Min. distance of shade to ceiling is 50 cm

Ceiling Suspended Straight

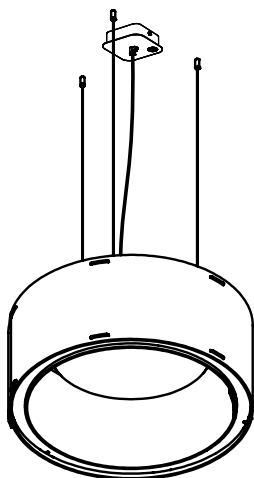

Ceiling Suspended Straight
Fixing System Screw with 3 cables of 2 or 5 m (black or alu)
Min. distance of shade to ceiling is 10 cm

⚠ If installing on suspended ceiling, verify load capacity prior to installation.

Acoustic Shade



The acoustic shade consists of two layers of BuzziFelt, finished with push buttons in glossy black.

The Light source is wrapped with a felt ring in the same felt color as the inside of the shade.

Bicolor is optional: inside/outside in a different BuzziFelt color.



Diffusion



Attenuation



Mid tone



High tone

Canopy and power cable



Ceiling canopy and power cable are available in two finishes:


Black (RAL 9005) powder coated metal ceiling canopy with black fabric power cable

White (RAL 9010) powder coated metal ceiling canopy with white fabric power cable

Acoustics

BuzziTrom

Equivalent sound absorption area in m² per object

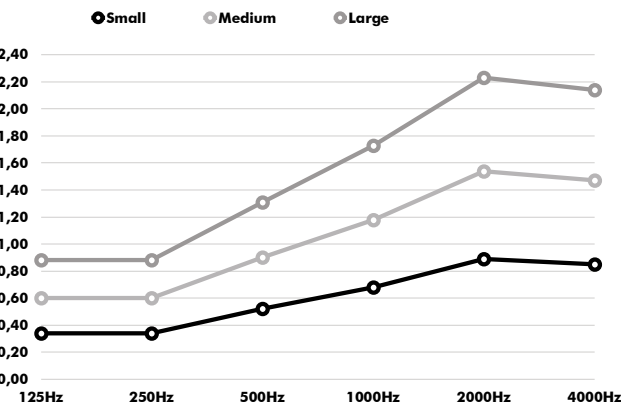


Hz	S Aeq/m²	M Aeq/m²	L Aeq/m²
125	0.34	0.60	0.88
250	0.34	0.60	0.88
500	0.52	0.90	1.31
1000	0.68	1.18	1.73
2000	0.89	1.54	2.23
4000	0.85	1.47	2.14



Dimensions

BuzziTrom S

Straight

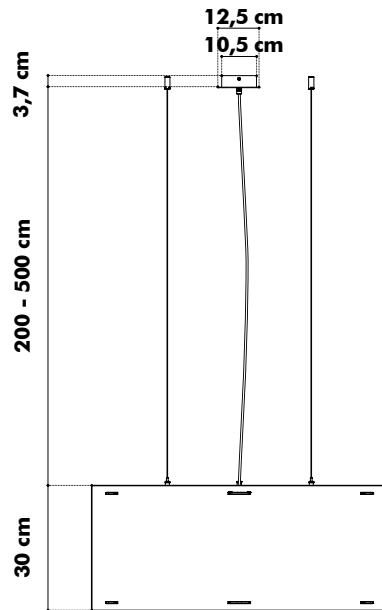


Split

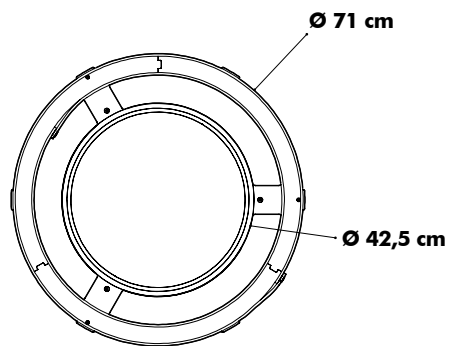
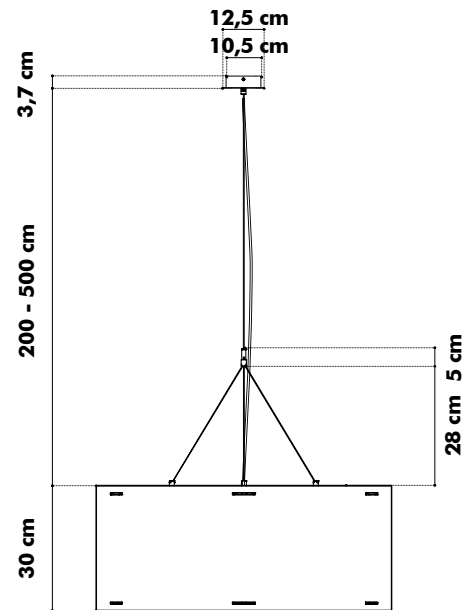


BuzziTrom M

Straight

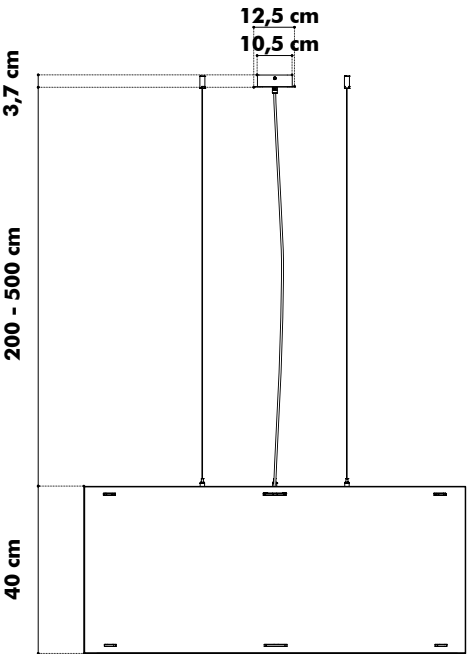


Split

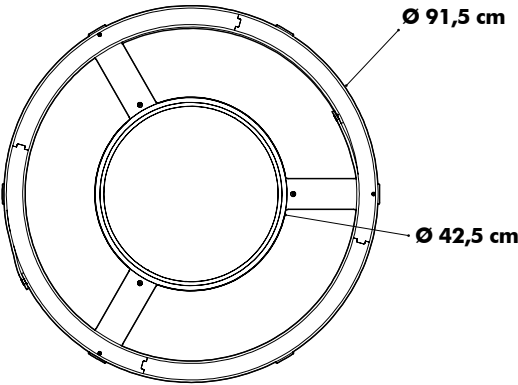
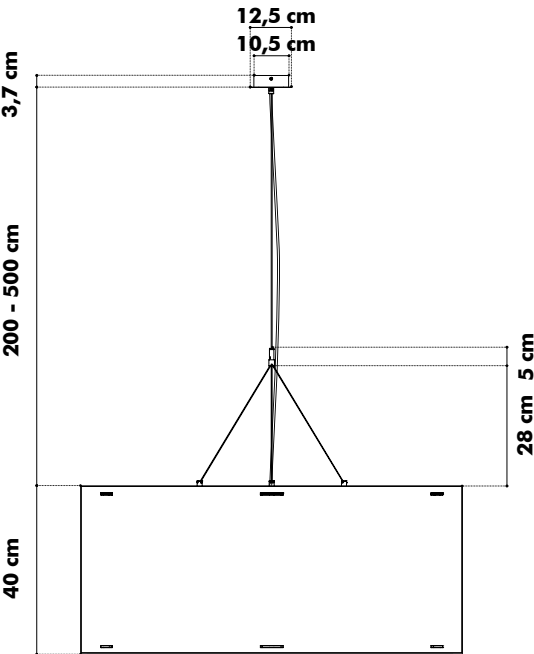


BuzziTrom L

Straight

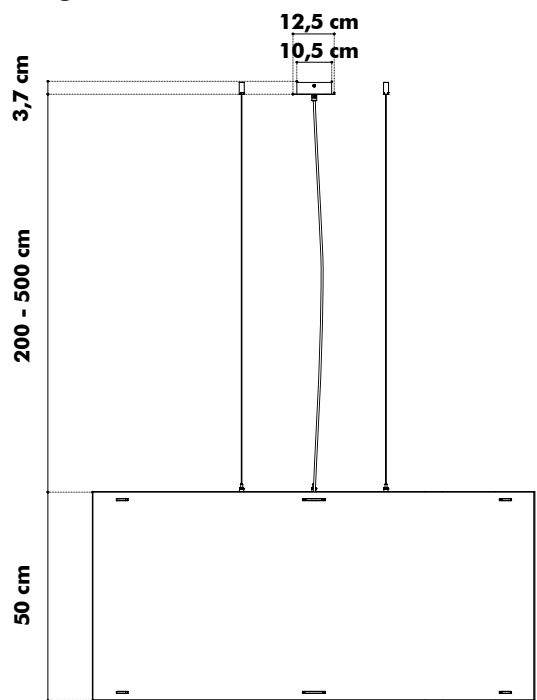


Split

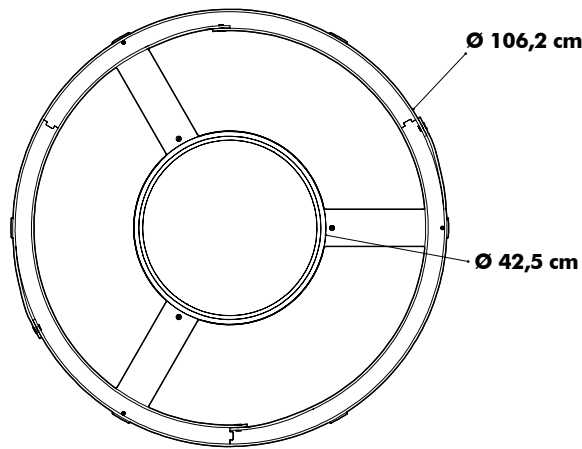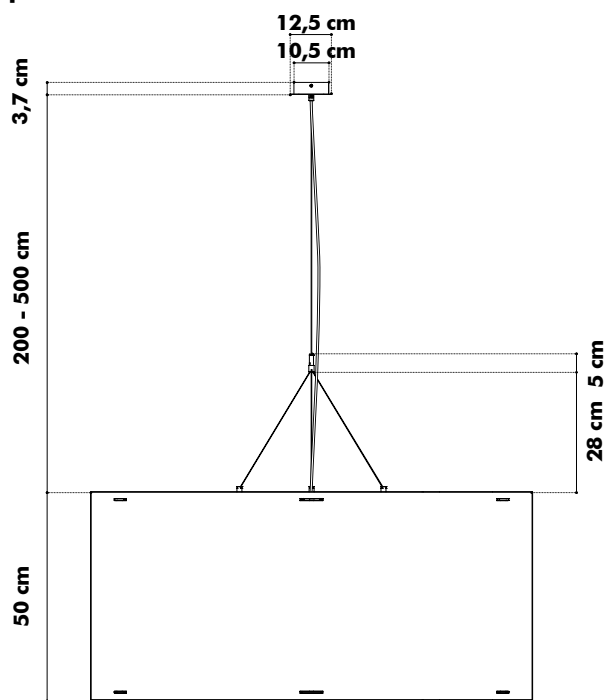


Weights

BuzziTrom S

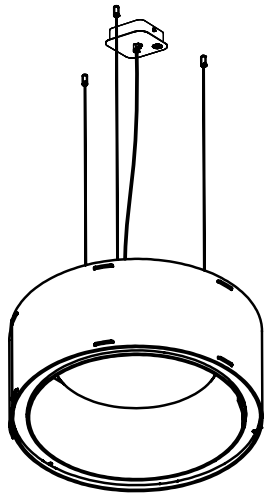


 10,4 kg

BuzziTrom M

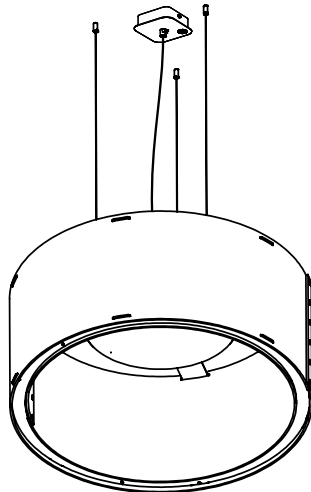

 12,6 kg


BuzziTrom L

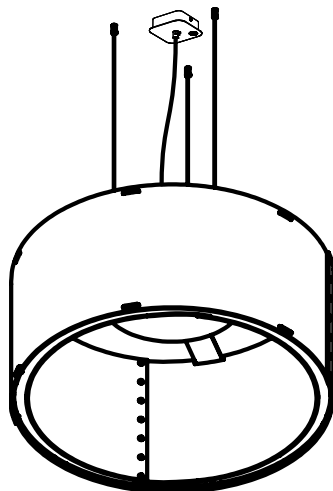

 13,8 kg

Fabrics

Felt (15 colors)



Composition 100% Recycled P.E.T. Felt, latex backing

Weight 1.000 g/m2 | 29.49 oz/yd2

Abrasion resistance >7.000 Martindale

Flammability EU: EN 13501.1 + A1/2009 Class B-s1,d0
USA: ASTM E84 Class A certified

Fastness to light USA 5

