



Product Specification Sheet

BuzziMoon US

— By BuzziSpace Studio

Embedded light

BuzziMoon offers the best of both worlds; highly functional general lighting embedded in a proven acoustic ceiling solution. One of the first acoustical lighting solutions that is equally performant on lighting as on acoustic level. The LED light module is designed specifically to answer the request of general lighting in office space. The Moon can be finished off in different fabrics and various 3D patterns. The diffuser gives it a “full moon” lighting experience. BuzziMoon is equally available in EU and US.





The Family

Models

BuzziMoon Round

BuzziMoon Oval

LED Disk

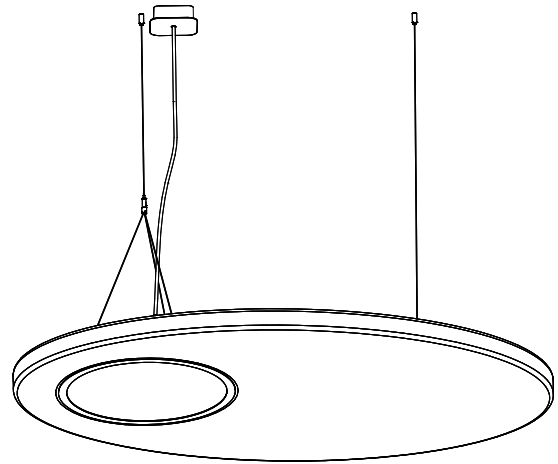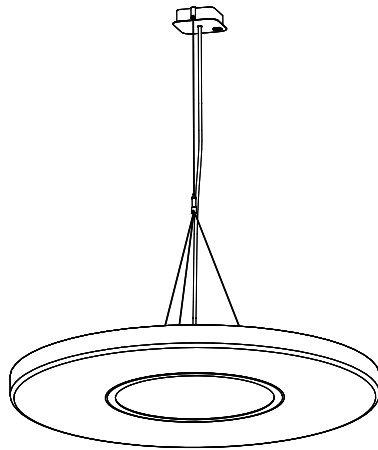

Required order information

1. Model
2. Size
3. Pattern
4. Fabric (CAT -> Collection -> Color)
5. Lighting Options (Voltage Input, Color Temperature, UGR, Dimming)
6. Mounting Option

Lighting Data

Lighting Unit

LED Disk



The BuzziMoon consist of a LED PCB solution containing mid power LED's to create an optimal light spread. The LED solution is available in a color temperature of 3000K or 4000K

Select a milky diffuser to achieve a diffuse light surface without any dottiness. Or select a prismatic diffuser to achieve an UGR value of 19. LED dots will be visible



UGR 22
Milky Diffuser



UGR 19
Prismatic Diffuser

BuzziMoon Suspended Lighting options

Models: Round | Oval | S | M | L

Lighting Options

Characteristics

Mounting

Voltage Input	Color Temperature	UGR (Diffuser type)	Dimming	Technical	Visual	Pattern	Options
120V	3000K	22 (milky)	1-10V Dali	Power consumption: 35W Light output: 3170 Lm Efficacy: 91 Lm/W CRI > 90	Black ceiling canopy and black power cable White ceiling canopy and white power cable	Flat, 3D Rib, 3D Drop*, 3D Leaf	Ceiling Suspended
		19 (prismatic)**	1-10V Dali	Power consumption: 35W Light output: 3600 Lm Efficacy: 103 Lm/W CRI > 90			Straight: 3 cables 78.74" or 196.85" Alu or Black
	4000K	22 (milky)	1-10V Dali	Power consumption: 35W Light output: 3400 Lm Efficacy: 97 Lm/W CRI > 90			Split: 1 cable splits in 3 78.74" or 196.85" Alu or Black
		19 (prismatic)**	1-10V Dali	Power consumption: 35W Light output: 3660 Lm Efficacy: 105 Lm/W CRI > 90			
	3500K	22 (milky)	1-10V	Power consumption: 29W Light output: 2545 Lm Efficacy: 88 Lm/W CRI > 90			Split: 1 cable splits in 3 78.74" or 196.85" Alu
277V	3000K	22 (milky)	1-10V	Power consumption: 29W Light output: 2545 Lm Efficacy: 88 Lm/W CRI > 90	White ceiling canopy and white power cable	Flat, 3D Rib, 3D Drop*, 3D Leaf	
	3500K						

BuzziMoon Ceiling Mounted Lighting options

Models: Round | S | M | L

Options		Characteristics			Mounting	
Voltage Input	Color Temperature	UGR (Diffuser type)	Dimming	Technical	Pattern	Options
120V	3000K	22 (milky)	1-10V Dali	Power consumption: 35W Light output: 3170 Lm Efficacy: 91 Lm/W CRI > 90	Flat, 3D Rib, 3D Drop*, 3D Leaf	Ceiling Mounted
		19 (prismatic)**	1-10V Dali	Power consumption: 35W Light output: 3600 Lm Efficacy: 103 Lm/W CRI > 90		
	4000K	22 (milky)	1-10V Dali	Power consumption: 35W Light output: 3400 Lm Efficacy: 97 Lm/W CRI > 90		
		19 (prismatic)**	1-10V Dali	Power consumption: 35W Light output: 3660 Lm Efficacy: 105 Lm/W CRI > 90		

* 3D Drop not possible for Oval


** To achieve a UGR 19, the product is fitted with a Prismatic diffuser instead of a milky diffuser. LED dots will be visible.




Photometric Data

BuzziMoon LED Disk

LED Disk Cartesian diagram

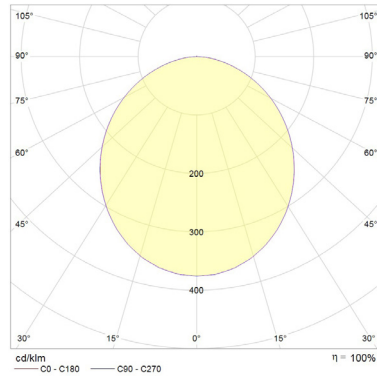





LED Disk Polar curve

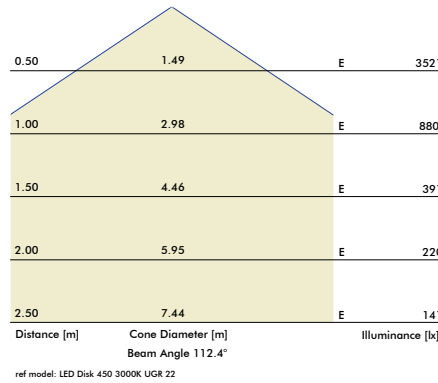

Tips and Tricks - Light Options

To enlight your workplace with optimal lux levels take following measurements into account:

BuzziMoon LED Disk

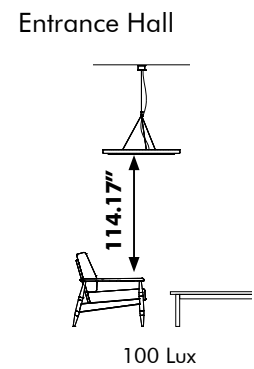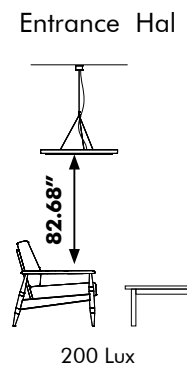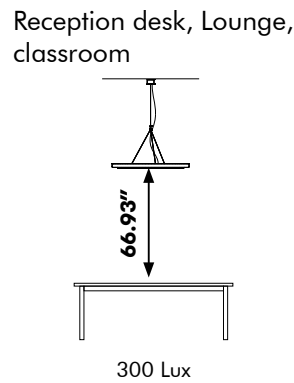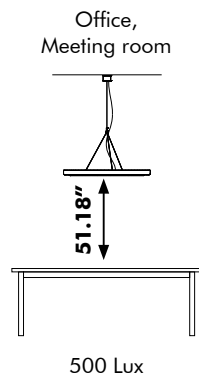


* According to EN12464

Product Data



Fixing System

Round

Ceiling Mounted


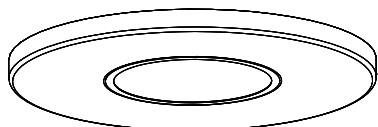


Ceiling Suspended Straight

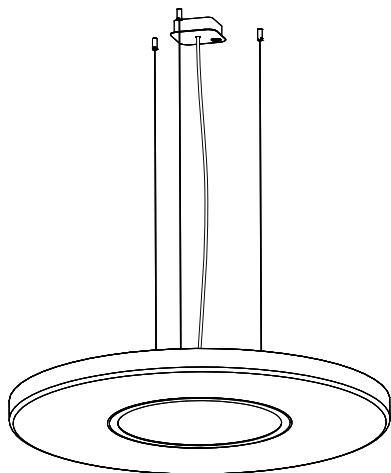


Ceiling Suspended Straight
Fixing System Screw with 3 cables of
78.74" or 196.85" (black or alu)

Ceiling Suspended Split

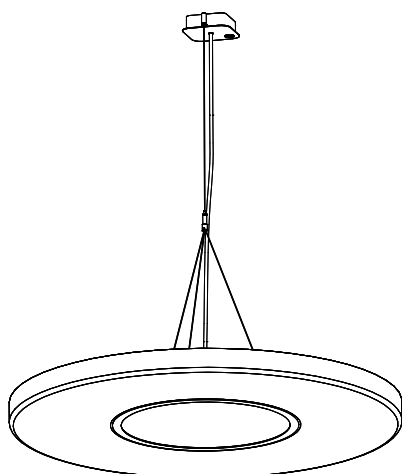



Ceiling Suspended Split
Fixing System Screw with 3 split cables and 1 main
cable, total length of 78.74" or 196.85"
(black or alu)
Min. distance of shade to ceiling is 19.69"



* No black cables available for:
120V 3500K
277V 3000K
277V 3500K



Oval

Ceiling Suspended Straight

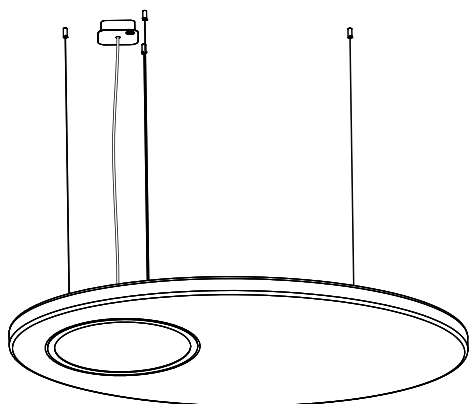


Ceiling Suspended Straight
Fixing System Screw with 4 cables of
78.74" or 196.85" (black or alu)

Ceiling Suspended Split

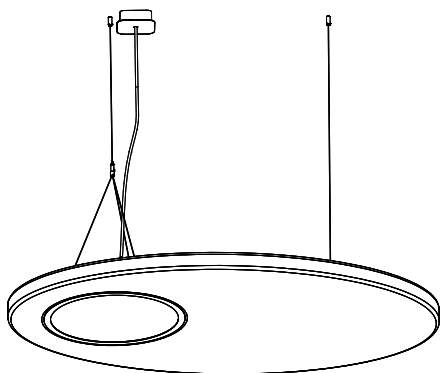


Ceiling Suspended Split
Fixing System Screw with 3 split cables and 1 main
cable, total length of 78.74" or 196.85"
(black or alu)
Min. distance of shade to ceiling is 19.69"

* No black cables available for
120V 3500K
277V 3000K
277V 3500K



▲ If installing on suspended ceiling, verify load capacity prior to installation.

Acoustic Panel

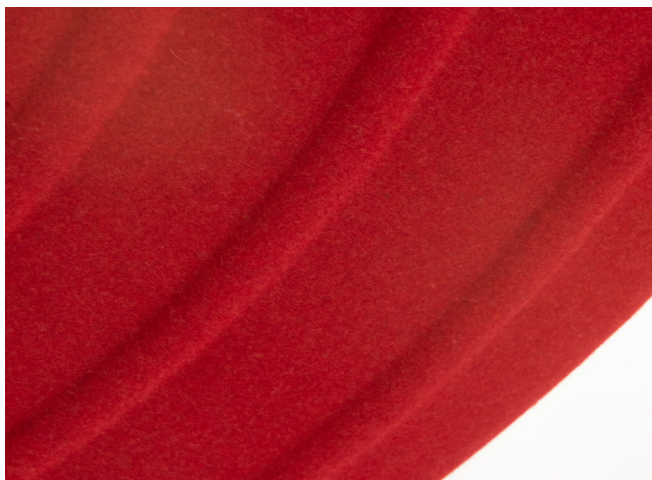

The acoustic panel is upholstered top to bottom in a
chosen fabric



Absorption



Diffusion



Mid tone



High tone

Canopy and power cable



Ceiling canopy and power cable are available in two finishes:

Black (RAL 9005) powder coated metal ceiling canopy with black fabric power cable

White (RAL 9010) powder coated metal ceiling canopy with white fabric power cable




Patterns Round

Flat

L

M

S



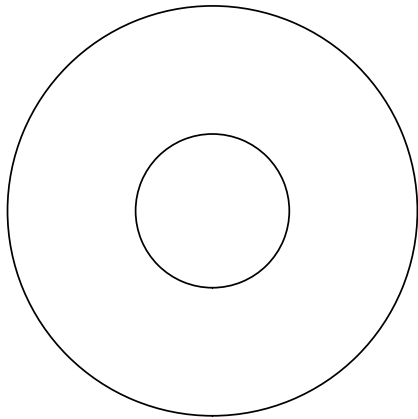


3D Rib

L

M

S


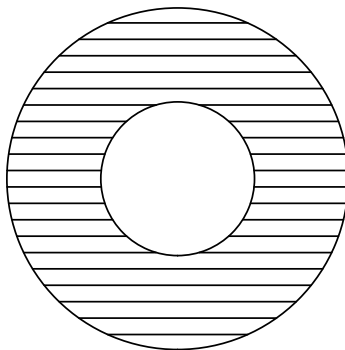
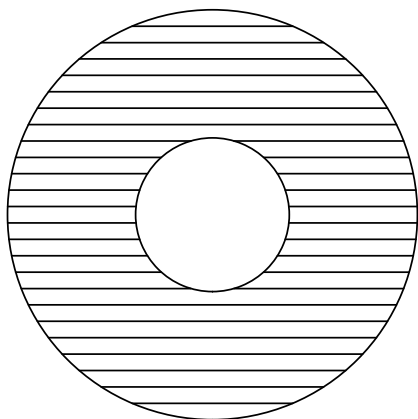


3D Leaf

L

M

S



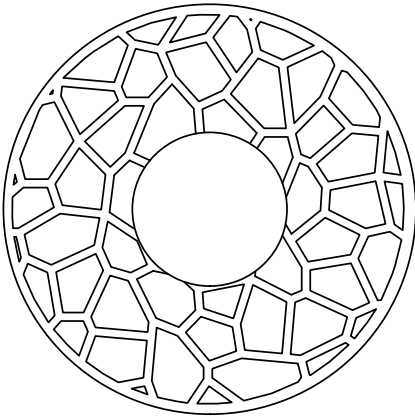


3D Drop

L

M


S

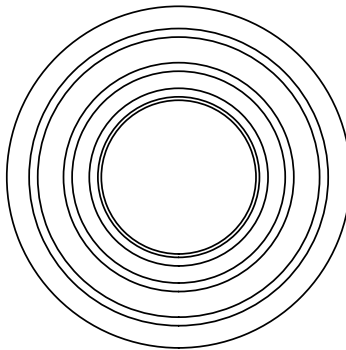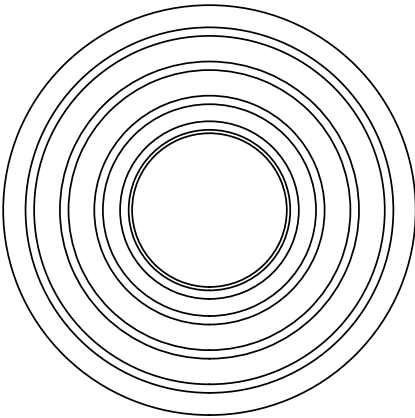


Patterns Oval

Flat

M

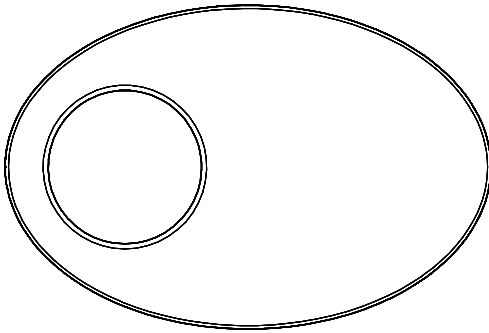


S

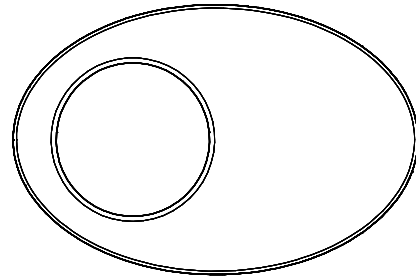


3D Leaf

M

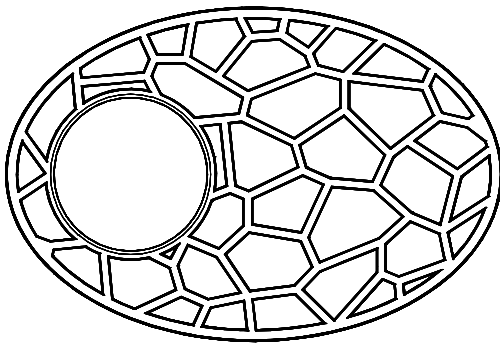


S

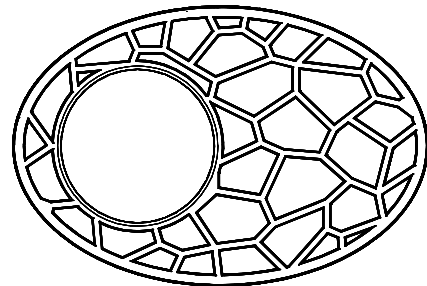


3D Rib

M

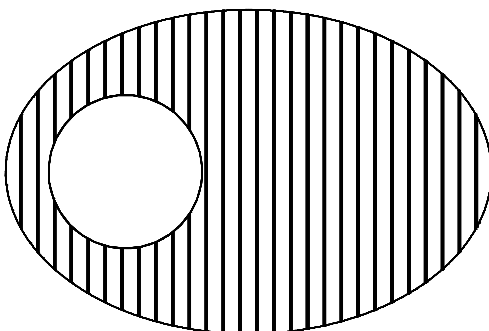


S

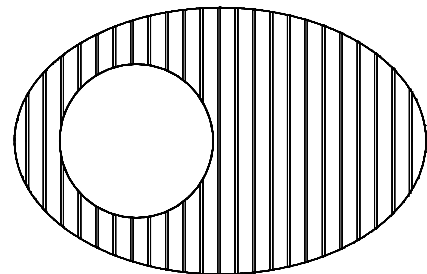

Acoustics

BuzziMoon Round


Equivalent sound absorption area in m² per object

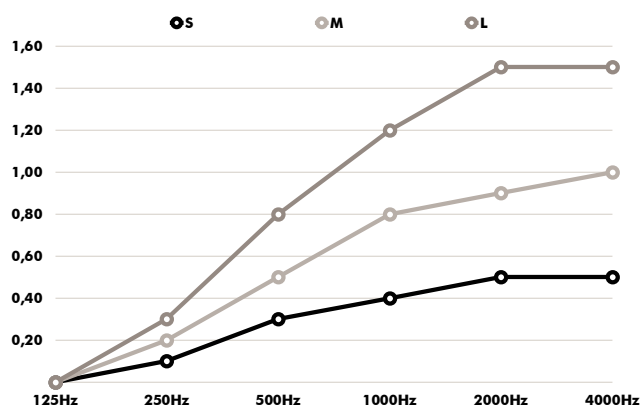

Hz	S Aeq/m²	M Aeq/m²	L Aeq/m²
125	0.0	0.0	0.0
250	0.1	0.2	0.3
500	0.3	0.5	0.8
1000	0.4	0.8	1.2
2000	0.5	0.9	1.5
4000	0.5	1	1.5

BuzziMoon Oval


Equivalent sound absorption area in m² per object

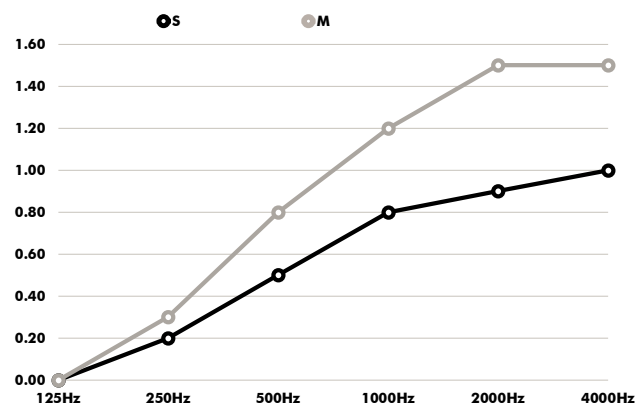


Hz	S Aeq/m²	M Aeq/m²
125	0.0	0.0
250	0.2	0.3
500	0.5	0.8
1000	0.8	1.2
2000	0.9	1.5
4000	1	1.5

Dimensions

Acoustic Panel Round

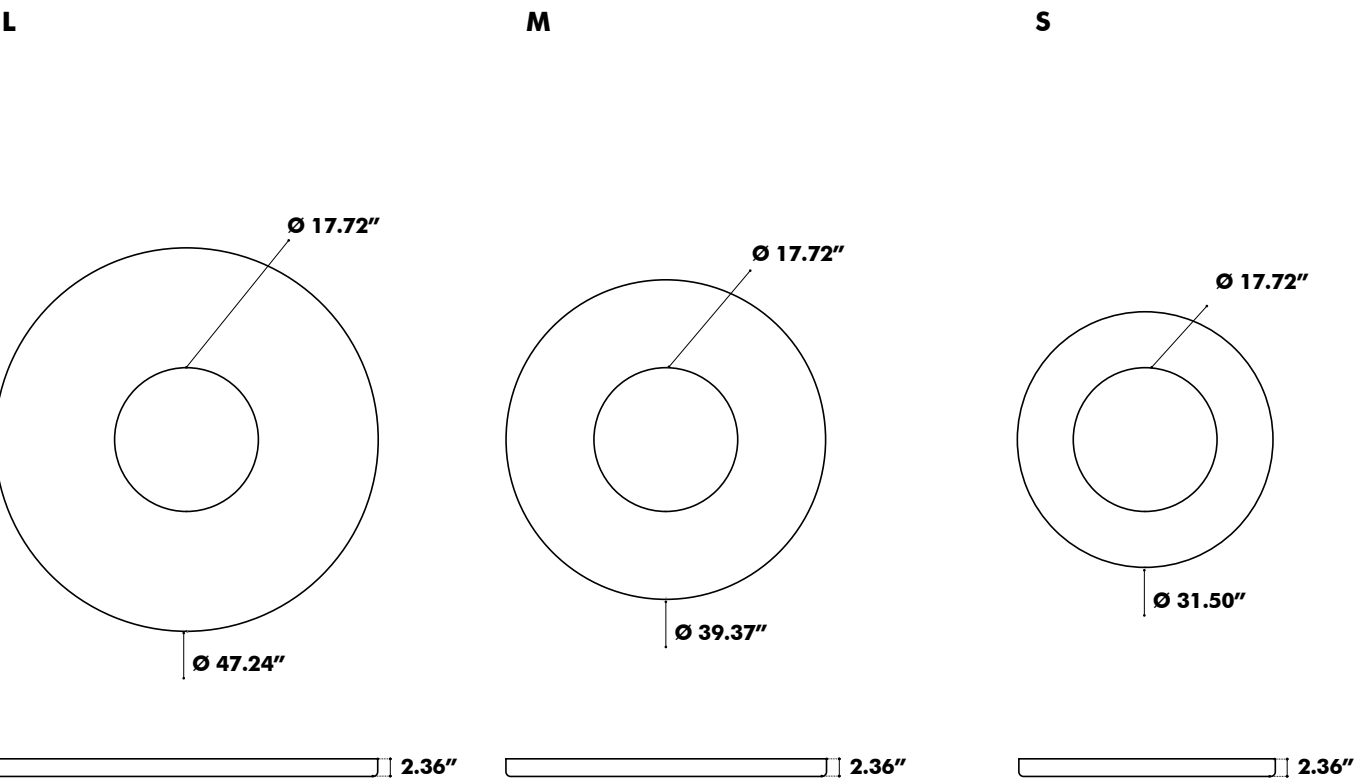


Ceiling Mounted Round

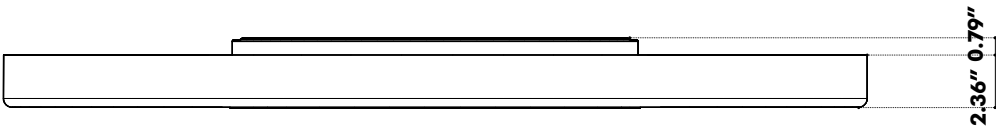


Ceiling Suspended Round

Split

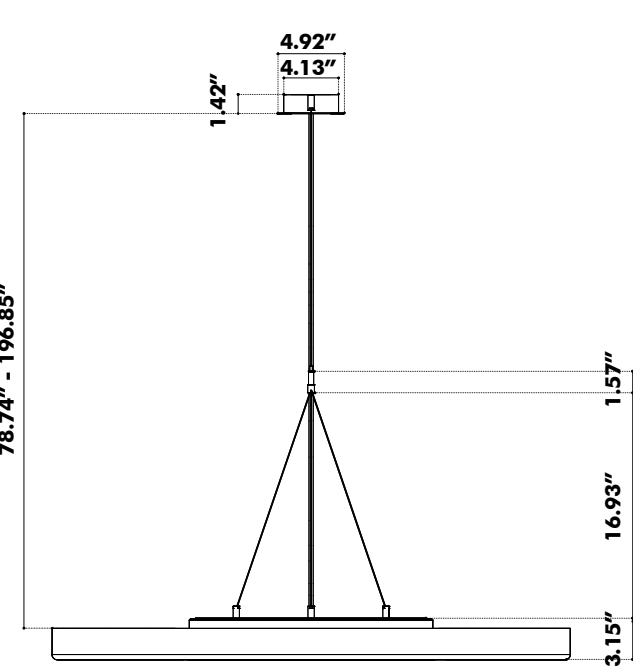


Ceiling Suspended Round

Straight

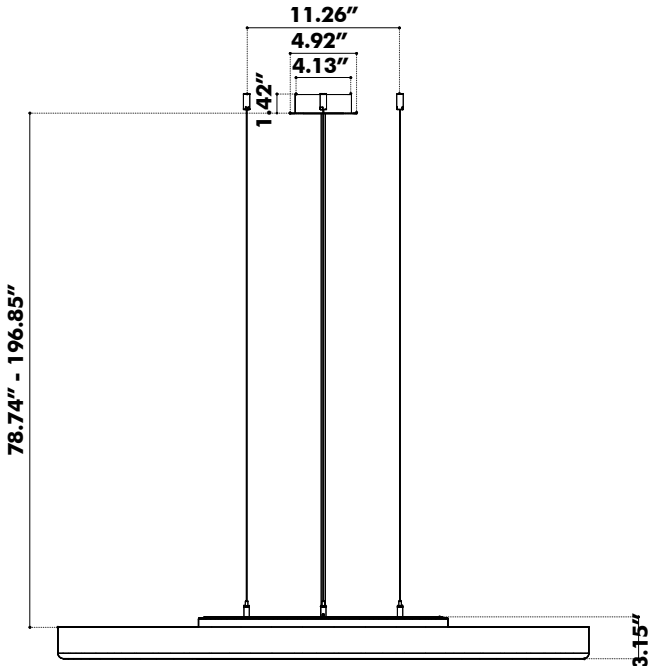


Acoustic Panel Oval


M

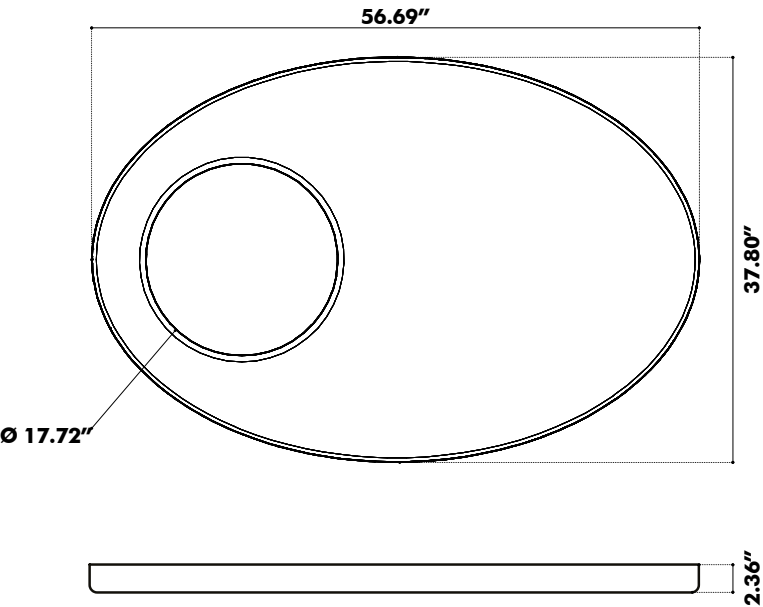


S

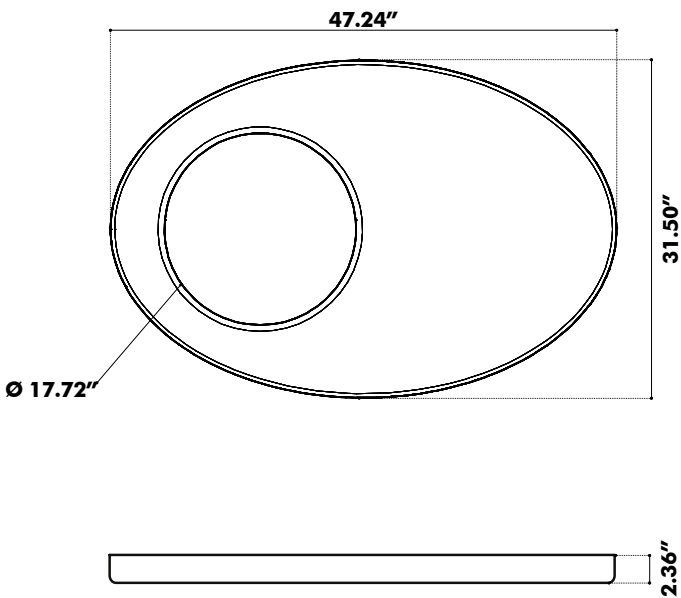

Ceiling Suspended Split Oval

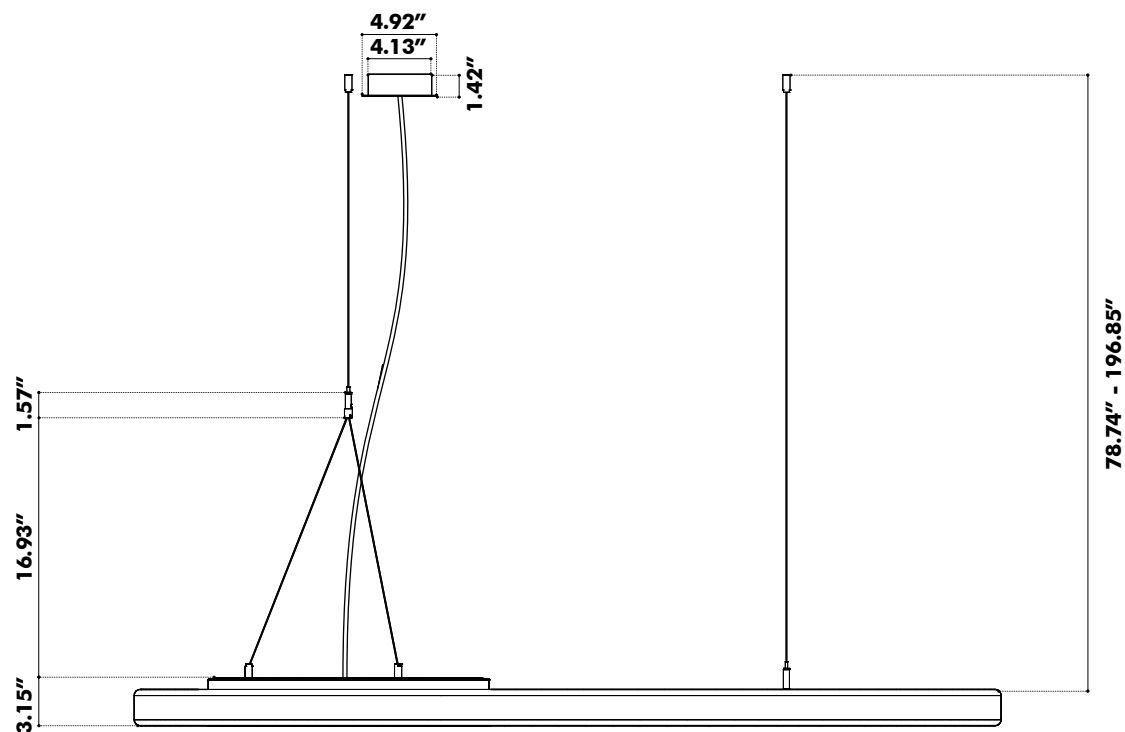


Ceiling Suspended Straight Oval

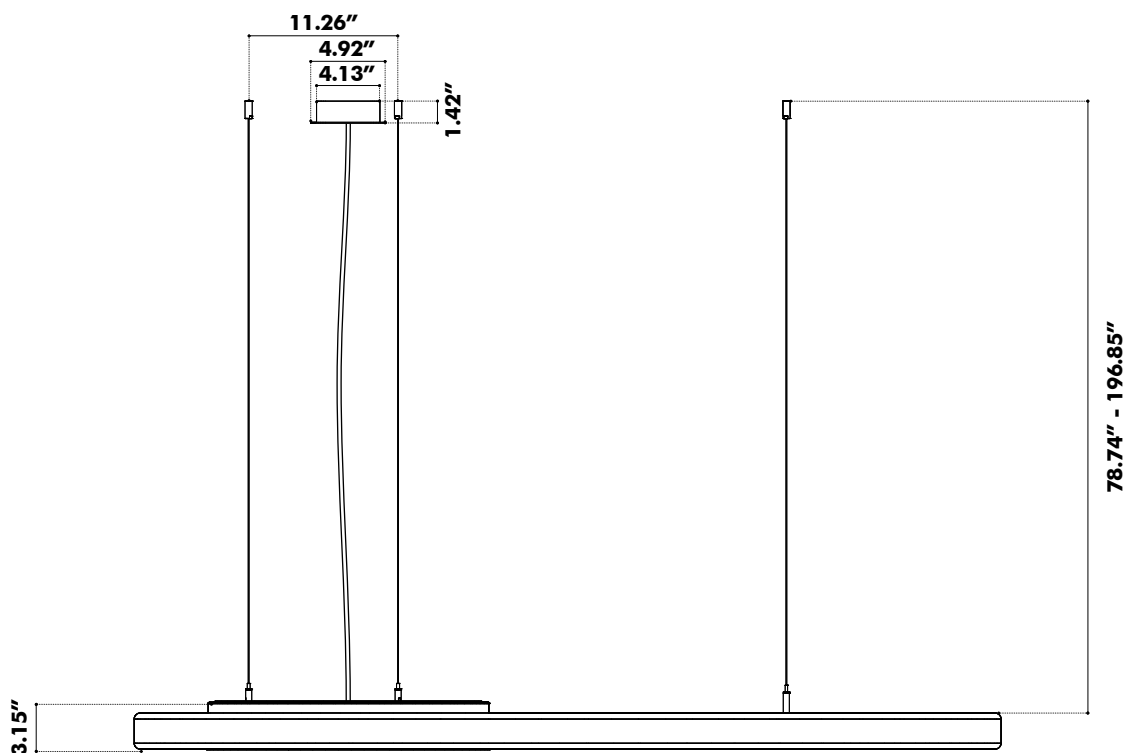

Weights


BuzziMoon Small Ceiling Mounted Round

 18.74 lbs




BuzziMoon Medium Ceiling Mounted Round

 23.15 lbs

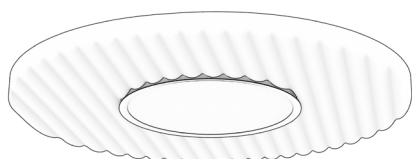


BuzziMoon Large Ceiling Mounted Round

 27.56 lbs

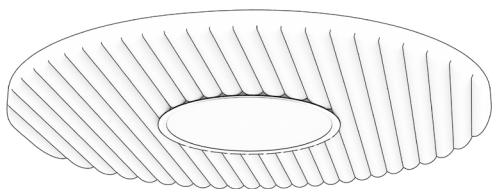

BuzziMoon Small Ceiling Suspended Round

 20.94 lbs




BuzziMoon Medium Ceiling Suspended Round

 25.35 lbs




BuzziMoon Large Ceiling Suspended Round

 29.76 lbs

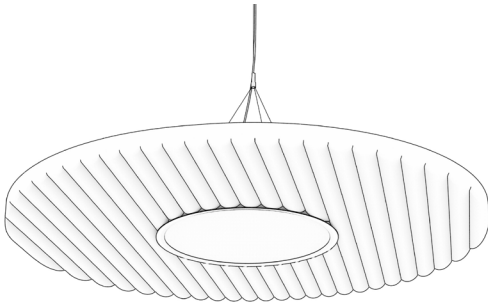


BuzziMoon Small Ceiling Suspended Oval

 22.05 lbs

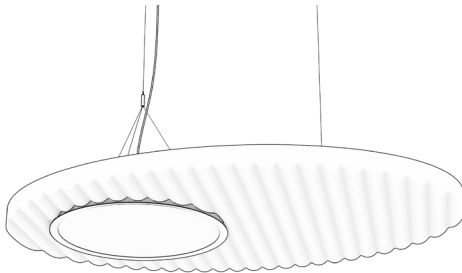


BuzziMoon Medium Ceiling Suspended Oval

 26.46 lbs

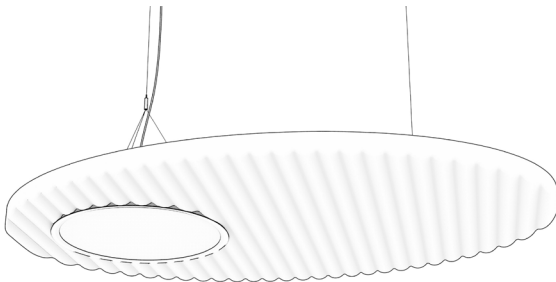

Fabrics

Fabric (45 colors)



Category A

Composition 70% Recycled Wool, 25% Recycled Polyacryl,
5% Recycled Other Fabrics

Weight 405 g/m² | 11.94 oz/yd²

Abrasion resistance 40.000 Martindale, 50,000 Wyzenbeek

Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette).
EN 1021.2/2006 | BS EN 1021.2/2006 (match)
USA: CAL TB 117 | ASTM E84 CLASS A


Fastness to light EU: 4 | USA 4

Fastness to rubbing EU: Wet 3-4 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Trevira CS (47 colors)



Category A

Weight 420 g/m² | 12.39 oz/yd²

Composition 100% Polyester, Trevira CS

Abrasion resistance 100.000 Martindale, 90,000 Wyzenbeek

Flammability BS 5852 part II: CRIB 5 | BS 7176 Medium Hazard
USA: CAL TB 117 | M1 | B1 | EN 1021/1-2 | C1 |
IMO Res. A652 (16)


Fastness to light EU: 6 | USA 5

Fastness to rubbing EU: Wet 4-5 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Reflect (34 colors)



Category A

Weight 430 g/m² | 13.78 oz/yd²

Composition 100% Post-consumer recycled polyester

Abrasion resistance 100.000 Martindale

Flammability AS/NZS 3837 class 1 | ASTM E84 Class A Unadhered

ASTM E84 Class B Adhered | BS 5852 crib 5 with treatment

BS 5852 part 1 with treatment | EN 1021-1/2 | US Cal. Bull. 117-2013

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing EU: Wet 5-5 | Dry 5-5


Pilling Note 4, EN ISO 12945



kvadrat

Revive 1 (25 colors)

kvadrat



Category A

Composition 100% recycled polyester FR

Weight 430 g/lin.m

Abrasion resistance 60.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1

UNI 9175 1IM | US Cal. Tech. Bull. 117

IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 5, wet 4-5

Pilling Note 4-5, EN ISO 12945



Clara 2 (24 colors)

kvadrat



Category B

Composition 92% new wool, 8% nylon

Weight 400 g/lin.m

Abrasion resistance 80.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852, ignition source 2-3 | DIN 4102 B2

NF D 60 013 | UNI 9175 1IM | US Cal. Tech. Bull. 117, Sec. E

NFPA 260 | IMO A.652(16)

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 4, EN ISO 12945



Remix 3 (73 colors)

kvadrat



Category B

Composition 90% new wool, 10% nylon

Weight 415 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1

Önorm B1/Q1 | NF D 60 013 | UNI 9175, 1IM

AS/NZS 1530.3 | Cal. Tech. Bull. 117-2013

NFPA 260 | IMO FTP Code 2010:Part 8

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 4, EN ISO 12945



Hero 2 (33 colors)

kvadrat



Category C

Composition 97% new wool, 3% nylon

Weight 580 g/lin.m

Abrasion resistance 45.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B2 | NF D 60 013

UNI 9175 1IM | US Cal. Bull. 117-2013 | NFPA 260

IMO A.652 (16)

Fastness to light Note 5-6, ISO 105-B02


Fastness to rubbing (ISO) dry 4-5, wet 4-5

Pilling Note 3-4, EN ISO 12945



Hero 2 (33 colors)

kvadrat



Category C

Composition 97% new wool, 3% nylon

Weight 580 g/lin.m

Abrasion resistance 45.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B2 | NF D 60 013
UNI 9175 1IM | US Cal. Bull. 117-2013 | NFPA 260
IMO A.652 (16)

Fastness to light Note 5-6, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4-5

Pilling Note 3-4, EN ISO 12945



Tonus 4 (47 colors)

kvadrat



Category D

Composition 90% new wool, 10% Helanca

Weight 665 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1 | DIN 4102 B2
Önorm B1/Q1 | NF D 60 013 | UNI 9175 1IM
US Cal. Bull. 117-2013 | NFPA 260 | IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 3-5, wet 3-5

Pilling Note 3, EN ISO 12945



Arda (12 colors)

kvadrat



Category E

Composition 70% new wool 21% polyester 9% nylon

Weight 800 g/lin. m | 25.8 oz/ly

Abrasion resistance

Approx. 50.000 Martindale rubs, EN ISO 12947


Flammability ASTM E84 Class A Unadhered | AS/NZS 3837 class 2 | BS 5852 part 1
BS 5852 crib 5 | DIN 4102 B2 | EN 1021-1/2 | IMO FTP Code 2010 Part 8
UNI 9175 1IM | US Cal. Bull. 117-2013

Fastness to light Note 5-8, ISO 105-B02

Fastness to rubbing Dry note 3-5 ISO 105-X12
Wet note 3-5 ISO 105-X12

Pilling Note 4, EN ISO 12945



**Category E****Composition** 100% Trevira CS**Weight** 700 g/lin.m**Abrasion resistance**

35.000 rubs acc. to the Martindale method, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1

NF D 60 013 | NF P 92 507 M1 | UNI 9175 11M

UNI 9177 classe 1 | US Cal. Tech. Bull. 117

IMO A.652 (16)

Fastness to light Note 5-8, ISO 105-B02**Fastness to rubbing** (ISO) dry 4-5, wet 4-5**Pilling** Note 4, EN ISO 12945