



Product Specification Sheet

BuzziDome EU

— By BuzziSpace Studio

Elegant acoustic lighting

Meet BuzziDome, a modern noise-reducing light with a refined semi-dome shape. BuzziDome's concave design, coupled with its acoustic foam element, acts as an excellent diffuser and absorber of sound. Therefore, BuzziDome provides exceptional acoustic treatment for any setting.

A recessed LED light source, accentuates the pendant's meticulous craftsmanship while also emitting a warm, functional light. BuzziDome accommodates the demand for both sound absorption and light, being the perfect fit for workplaces, hospitality settings, and break-out areas. Pick yours from a wide range of colorful upholstery options. It will definitely complement the aesthetic scheme of your interior.




The Family

Model

BuzziDome

Lighting Unit

**LED Disk
Ø 470**

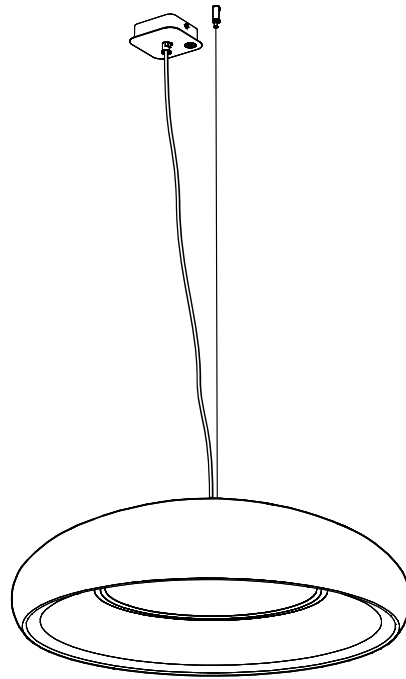

Required order information

1. Fabric (CAT -> Collection -> Color)
2. Mounting Option

Lighting Data

Lighting Unit

LED Disk Ø 470



The PMMA diffuser ensures an optimal light spread and efficiency. It creates a very diffuse light surface without any dottiness.

The light source of the BuzziDome is a LED PCB, containing 36 low power LED's.

On Request: UGR 19

To achieve a UGR 19, the product is fitted with a Prismatic diffuser instead of a milky diffuser. LED dots will be visible.

BuzziDome Lighting options

Lighting Options			Characteristics		Mounting	
Voltage Input	Color Temperature	UGR (Diffuser type)	Dimming	Technical	Visual Options	
230V	3000K	22 (milky)	1-10V Dali	Power consumption: 29W Light output: 2545 Lm Efficacy: 88 Lm/W CRI: > 90	Black ceiling canopy and black power cable White ceiling canopy and transparent power cable	Black ceiling Canopy: 1 cable 2 m 5 m Alu or Black
		19 (prismatic)*	1-10V	Power consumption: 29W Light output: 2545 Lm Efficacy: 88 Lm/W CRI: > 90		White ceiling Canopy: 1 cable 2 m 4 m Alu or Black
	4000K	22 (milky)	1-10V Dali	Power consumption: 29W Light output: 2545 Lm Efficacy: 88 Lm/W CRI: > 90		




* To achieve a UGR 19, the product is fitted with a Prismatic diffuser instead of a milky diffuser. LED dots will be visible.


Photometric Data

BuzziDome LED Disk Ø 470

LED Disk Ø 470 Cartesian diagram

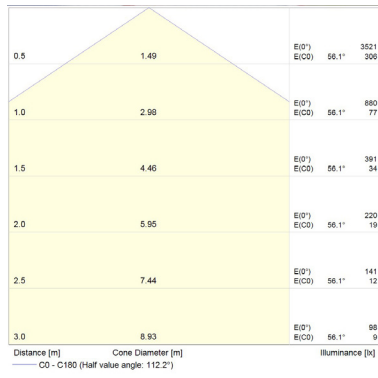





LED Disk Ø 470 Polar curve

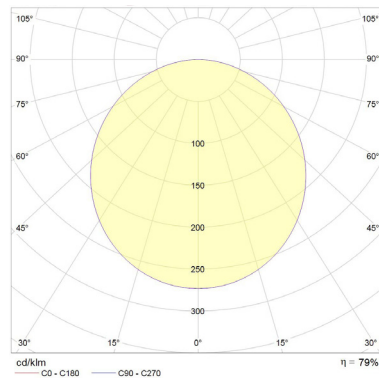



Tips and Tricks - Light Options

To enlight your workplace with optimal lux levels take following measurements into account:

BuzziDome LED Disk Ø 470



To ensure a continuous light spread into account take following distances inbetween the BuzziJets S | M | XL

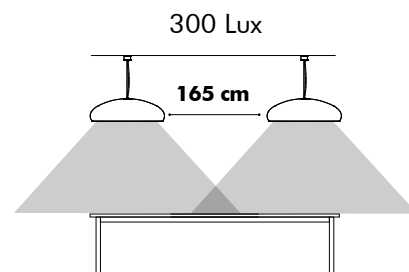
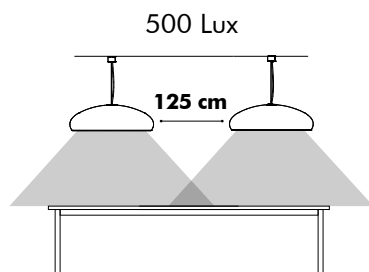


* According to EN12464

Product Data

Fixing System

Fixing System Acoustic Shade

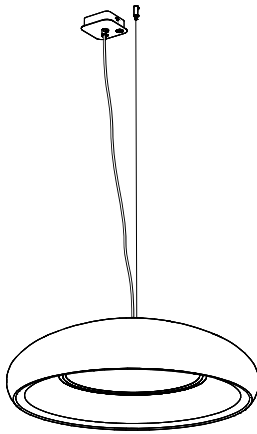

BuzziDome is suspended on 1 cable of 2 or 5 m black or alu colored cables, with fixing system screw.

⚠ If installing on suspended ceiling, verify load capacity prior to installation.

Acoustic Shade



The acoustic shade is upholstered top to bottom in a chosen fabric.

For certain fabrics, color variations may occur across the umbrella-shaped surface.

This is, especially, the case for color rich fabrics where differently colored yarns blend and result in different hues. This combination creates a lively play of irregular colors across the fabric. It's important to note that this isn't a defect or fault, but rather a unique characteristic of such fabrics.

This can occur when following fabrics are selected: Trevira CS, Remix 3 and Clara 2.

With a complex double-curved shape, some fabrics will cause the appearance of a waving motion close to the stitch. This typically applies to fabrics with visible yarns across the surface. It's not a defect, but a natural result following from the characteristics of product shape. This can occur when following fabrics are selected:

Trevira CS, Remix 3, Memory 2 and Clara 2.



Absorption



Diffusion



Low tone



Mid tone



High tone

Canopy and power cable



Ceiling canopy and power cable are available in two finishes:


Black (RAL 9005) powder coated metal ceiling canopy with black fabric power cable

White (RAL 9010) powder coated metal ceiling canopy with transparent power cable

Acoustics

BuzziDome


Equivalent sound absorption area in m² per object

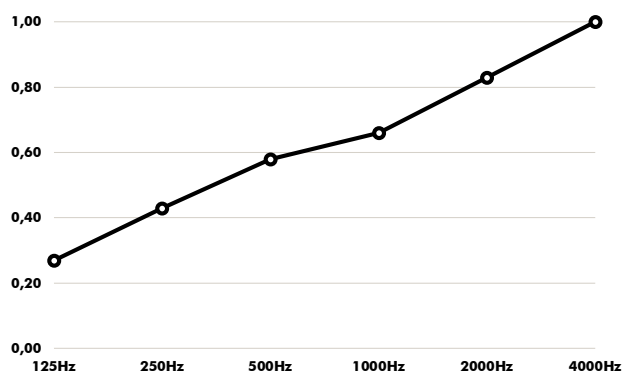

Hz	Aeq/m²
125	0,27
250	0,43
500	0,58
1000	0,66
2000	0,83
4000	1,00


Dimensions

BuzziDome

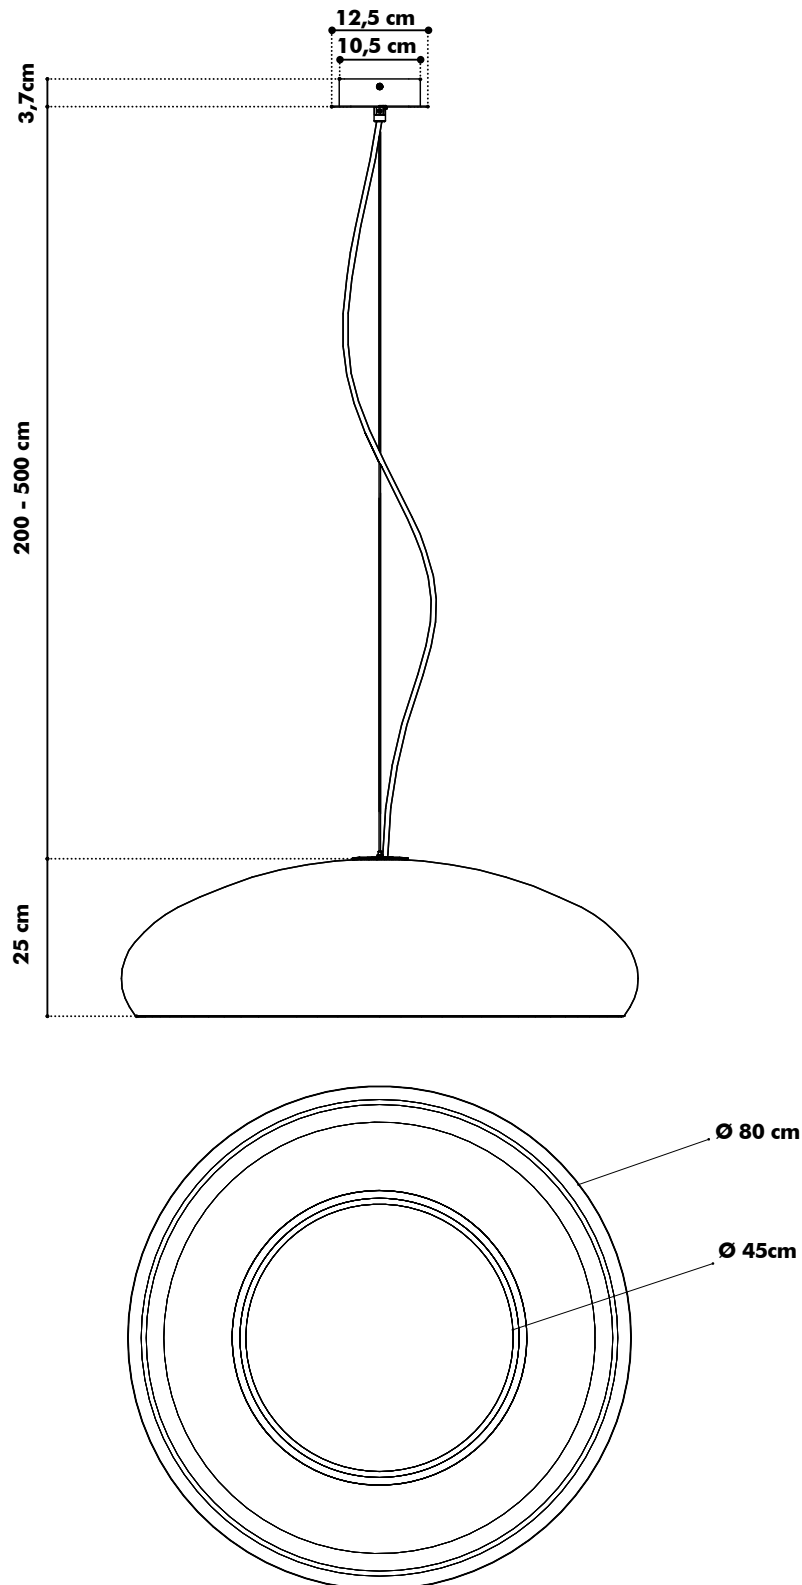

Weights


BuzziDome

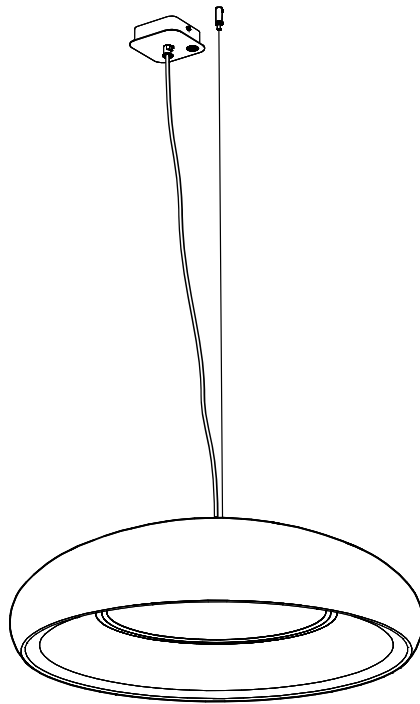

 13,5 kg

Fabrics

Fabric (45 colors)



Category A

Composition 70% Recycled Wool, 25% Recycled Polyacryl,
5% Recycled Other Fabrics

Weight 405 g/m² | 11.94 oz/yd²

Abrasion resistance 40.000 Martindale, 50,000 Wyzenbeek

Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette).
EN 1021.2/2006 | BS EN 1021.2/2006 (match)
USA: CAL TB 117 | ASTM E84 CLASS A


Fastness to light EU: 4 | USA 4

Fastness to rubbing EU: Wet 3-4 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Trevira CS (47 colors)



Category A

Weight 420 g/m² | 12.39 oz/yd²

Composition 100% Polyester, Trevira CS

Abrasion resistance 100.000 Martindale, 90,000 Wyzenbeek

Flammability BS 5852 part II: CRIB 5 | BS 7176 Medium Hazard
USA: CAL TB 117 | M1 | B1 | EN 1021/1-2 | C1 |
IMO Res. A652 (16)


Fastness to light EU: 6 | USA 5

Fastness to rubbing EU: Wet 4-5 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Reflect (34 colors)



Category A

Weight 430 g/m² | 13.78 oz/yd²

Composition 100% Post-consumer recycled polyester

Abrasion resistance 100.000 Martindale

Flammability AS/NZS 3837 class 1 | ASTM E84 Class A Unadhered

ASTM E84 Class B Adhered | BS 5852 crib 5 with treatment

BS 5852 part 1 with treatment | EN 1021-1/2 | US Cal. Bull. 117-2013

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing EU: Wet 5-5 | Dry 5-5


Pilling Note 4, EN ISO 12945



kvadrat

Clara 2 (24 colors)

kvadrat



Category B

Composition 92% new wool, 8% nylon

Weight 400 g/lin.m

Abrasion resistance 80.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852, ignition source 2-3 | DIN 4102 B2
NF D 60 013 | UNI 9175 1IM | US Cal. Tech. Bull. 117, Sec. E
NFPA 260 | IMO A.652(16)

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 4, EN ISO 12945



Remix 3 (73 colors)

kvadrat



Category B

Composition 90% new wool, 10% nylon

Weight 415 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1
Önorm B1/Q1 | NF D 60 013 | UNI 9175, 1IM
AS/NZS 1530.3 | Cal. Tech. Bull. 117-2013
NFPA 260 | IMO FTP Code 2010:Part 8

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 4, EN ISO 12945



Hero 2 (33 colors)

kvadrat



Category C

Composition 97% new wool, 3% nylon

Weight 580 g/lin.m

Abrasion resistance 45.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B2 | NF D 60 013
UNI 9175 1IM | US Cal. Bull. 117-2013 | NFPA 260
IMO A.652 (16)

Fastness to light Note 5-6, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4-5

Pilling Note 3-4, EN ISO 12945



Tonus 4 (47 colors)

kvadrat



Category D

Composition 90% new wool, 10% Helanca

Weight 665 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1 | DIN 4102 B2

Önorm B1/Q1 | NF D 60 013 | UNI 9175 11M

US Cal. Bull. 117-2013 | NFPA 260 | IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 3-5, wet 3-5

Pilling Note 3, EN ISO 12945



Arda (12 colors)

kvadrat



Category E

Composition 70% new wool 21% polyester 9% nylon

Weight 800 g/lin. m | 25.8 oz/ly

Abrasion resistance

Approx. 50.000 Martindale rubs, EN ISO 12947

Flammability ASTM E84 Class A Unadhered | AS/NZS 3837 class 2 | BS 5852 part 1

BS 5852 crib 5 | DIN 4102 B2 | EN 1021-1/2 | IMO FTP Code 2010 Part 8

UNI 9175 11M | US Cal. Bull. 117-2013

Fastness to light Note 5-8, ISO 105-B02

Fastness to rubbing Dry note 3-5 ISO 105-X12


Wet note 3-5 ISO 105-X12

Pilling Note 4, EN ISO 12945



Memory 2 (20 colors)

kvadrat



Category E

Composition 100% Trevira CS

Weight 700 g/lin.m

Abrasion resistance

35.000 rubs acc. to the Martindale method, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1

NF D 60 013 | NF P 92 507 M1 | UNI 9175 11M

UNI 9177 classe 1 | US Cal. Tech. Bull. 117

IMO A.652 (16)

Fastness to light Note 5-8, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4-5

Pilling Note 4, EN ISO 12945

