



## Product Specification Sheet

### **BuzziShade US**

— By Stal Collectief

The BuzziShade combines lit surroundings with acoustic performance.

The design prevents eavesdroppers from hearing your private conversations, and reduces external noise levels to a minimum. The BuzziShade is extremely versatile. The perfect addition to any office, waiting room or restaurant and is ideal for large-scale events. Be creative in colour by adding a layer of fabric to the BuzziFelt shades. The BuzziShade is the culmination of an artistic collaboration between BuzziSpace and the four young Belgian furniture designers of Stal Collectief.



# The Family

## Models

**BuzziShade M**

**BuzziShade L**


**BuzziShade XL**

**BuzziShade XXL**

**Retrofit E26**  
(bulb excluded)




**Sol Solo Globe**





**Lighting Units**



**Sol Solo Spot**



**No Electrification**

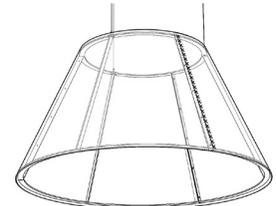

**LED Disk**  
Ø 470

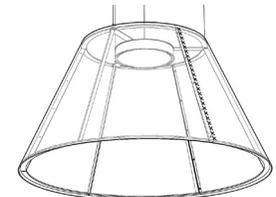

Required order information

1. Size
2. Light Option
3. Color Frame
4. BuzziFelt Color

5. Option Extra Layer Inside or Outside
6. Color Laze
7. Mounting Option
8. Color Ceiling Canopy (only for Retrofit)
9. Color Power Cable (only for Retrofit)

# Lighting Data

---

## Lighting Units


**Retrofit Lighting unit (only available for BuzziShade M | L)**



Retrofit E26 bulb excluded, Max 100W.


**BuzziSol (only available for BuzziShade M | L)**

**Globe**

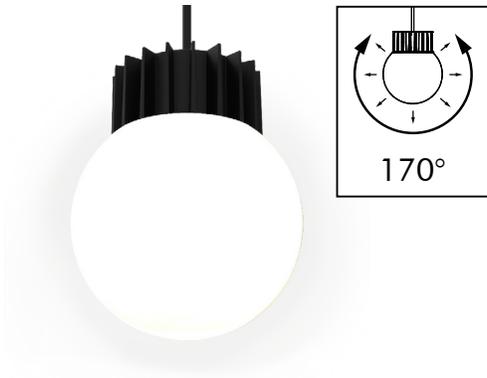


BuzziSol Solo is a suspended LED fixture consisting of 1 powder-coated black heatsink with LED chip on board (COB) light source. The product can be finished with a frosted glass globe diffuser which spreads the light in a large beam angle of 170°, enlighting the surroundings or a reflector spot adaptor directing the light with a beam angle of 38° downwards.

**Spot**

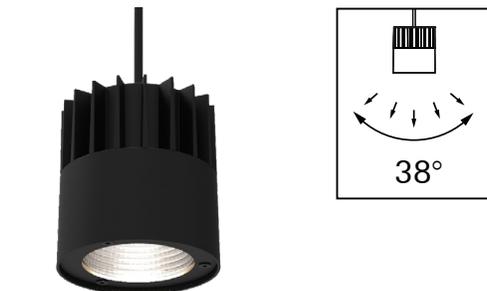

**No Electrification (only available for BuzziShade XL | XXL)**

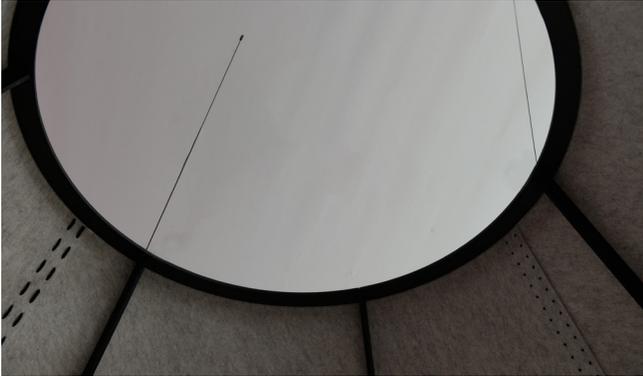

On request, the BuzziShade XL or XXL can be ordered without LED light Source

**LED Disk Ø 470 (only available for BuzziShade XL | XXL)**



The PMMA diffusor ensures an optimal light spread and efficiency. It creates a very diffuse light surface without any dottiness.  
The light source is a LED PCB, containing 36 low power LED's.

# BuzziShade

## Model: Medium | Large

### Lighting Options

**Lighting Unit**   **Voltage Input**

Retrofit  
E26      110-120V  
bulb excl.

### Characteristics

**Technical**

Wattage: Max. 100W

**Visual**

Color:  
Power Cable: Black, Red,  
Fluorescent Orange

Ceiling Canopy:  
Black

Metal Frame:  
Black, White,  
Fluorescent Orange

Lace:  
Black, White,  
Fluorescent Orange

### Mounting

**Options**

2 cables of  
78.74" or 196.85"  
Alu or Black

### Lighting Options

**Lighting Unit**   **Voltage Input**

LED      100-240V/277V  
Solo

**Color Temperature**

2700K  
3000K  
3500K  
4000K

**UGR (Diffuser type)**

23 (Globe)

**Dimming**

1-10V

**Technical**

Power consumption: 19W  
Light output: 1500 Lm  
Efficacy: 79 Lm/W  
CRI: > 90

**Visual**

Color:  
Power Cable:  
Black

Ceiling Canopy:  
Black

Metal Frame:  
Black, White,  
Fluorescent Orange

Lace:  
Black, White,  
Fluorescent Orange

### Mounting

**Options**

2 cables of  
78.74" or  
196.85"  
Alu or Black

12 (Spot)

1-10V

Power consumption: 19W  
Light output: 1500 Lm  
Efficacy: 79 Lm/W  
CRI: > 90

## Model: XL | XXL

**Lighting Unit**   **Voltage Input**

LED Disk      120-277V  
Ø 470

**Color Temperature**

3000K  
3500K

**UGR (Diffuser type)**

22 (milky)

**Dimming**

1-10V

**Technical**

Power consumption: 29W  
Light output: 2545 Lm  
Efficacy: 88 Lm/W  
CRI: > 90

**Visual**

Color:  
Black ceiling canopy  
and black power  
cable |  
White ceiling canopy  
and white power  
cable

Metal Frame:  
Black, White

Lace:  
Black, White

**Options**

3 cables of  
78.74" or  
196.85"  
Alu or Black




\* To achieve a UGR 19, the product is fitted with a Prismatic diffuser instead of a milky diffuser. LED dots will be visible.


# Photometric Data

## BuzziShade BuzziSol Solo


Sol Solo Globe Cartesian diagram

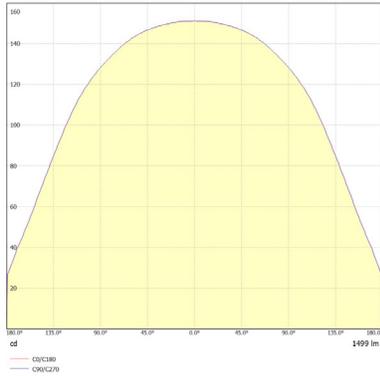


Sol Solo Globe Polar curve

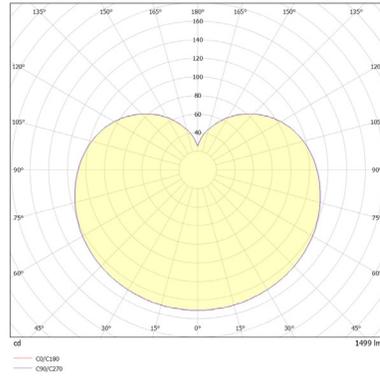

Sol Solo Spot Cartesian diagram

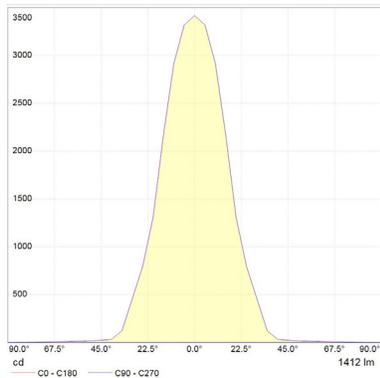


Sol Solo Spot Polar curve

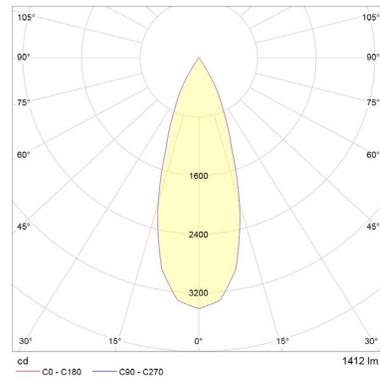


## BuzziShade LED Disk Ø 470

LED Disk Ø 470 Cartesian diagram

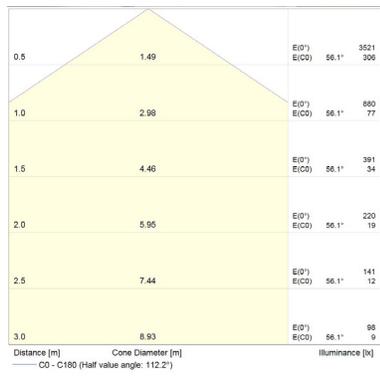

LED Disk Ø 470 Polar curve

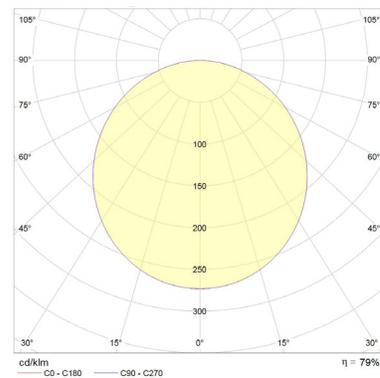

---


## Tips and Tricks - Light Options

To enlight your workplace with optimal lux levels take following measurements into account:

### BuzziShade BuzziSol Solo

#### Solo Spot


Office,  
Meeting room



500 Lux

#### Solo Globe


Office,  
Meeting room



100 Lux


### BuzziShade LED Disk Ø 470

Office,  
Meeting room

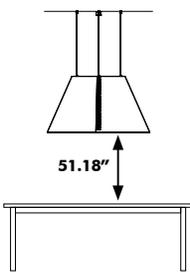


500 Lux

Reception desk, Lounge,  
classroom

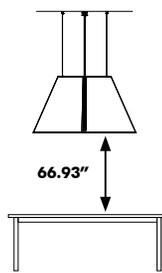


300 Lux

Entrance Hal

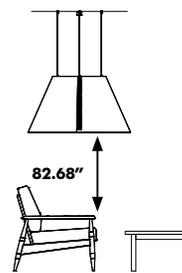

200 Lux

Entrance Hall

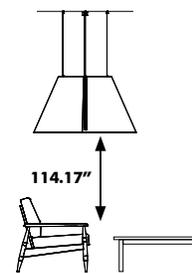




100 Lux

\* According to EN12464

# Product Data

## Fixing System

### Fixing System Acoustic Shade

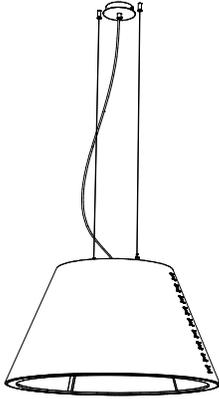

BuzziShade M and L are suspended on 2 cables of 78.74" or 196.85" black or alu colored cables, with fixing system screw.

BuzziShade XL and XXL are suspended on 3 cables of 78.74" or 196.85" black or alu colored cables, with fixing system screw.

▲ If installing on suspended ceiling, verify load capacity prior to installation.

## Acoustic Shade



The acoustic shade consists of one layer of BuzziFelt with our signature lacing.

BuzziShade M | L : Lace in Black, White or Fluorescent Orange.

BuzziShade XL | XXL : Lace in Black or White.

Two rows of lacing for size XL and three rows for size XXL

Optional: an extra layer of BuzziFabric can be added on the inside or outside.



Absorption



Mid tone




High tone

---

## Metal Frame



BuzziShade M I L : Powder coated metal frame in Black (RAL 9005), White (RAL 9010), Fluo Orange (RAL 2005)

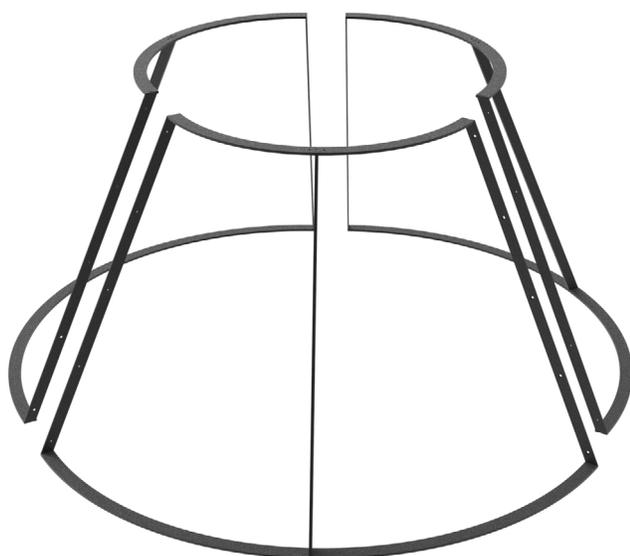

BuzziShade XL I XXL : Powder coated metal frame in Black (RAL 9005), White (RAL 9010)  
The metal frame is built up in 2 parts for XL and 3 parts for XXL

## Canopy and power cable



Ceiling canopy and power cable are available in two finishes:


Black (RAL 9005) powder coated metal ceiling canopy with black fabric power cable

White\* (RAL 9010) powder coated metal ceiling canopy with white fabric power cable

\*Only for Shade XL and XXL

## Acoustics

### BuzziShade Equivalent sound absorption area in m<sup>2</sup> per object

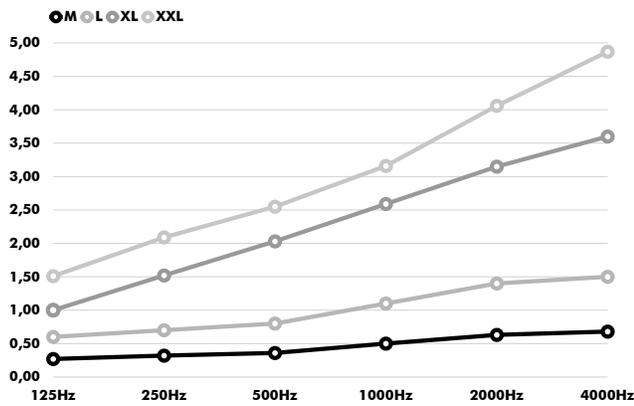


Hz	Shade M Aeq/m <sup>2</sup>	Shade L Aeq/m <sup>2</sup>	Shade XL Aeq/m <sup>2</sup>	Shade XXL Aeq/m <sup>2</sup>
125	0.27	0.60	1.00	1.51
250	0.32	0.70	1.52	2.09
500	0.36	0.80	2.03	2.55
1000	0.50	1.10	2.59	3.16
2000	0.63	1.40	3.15	4.06
4000	0.68	1.50	3.60	4.87


---

# Dimensions


## BuzziShade Pendant Medium

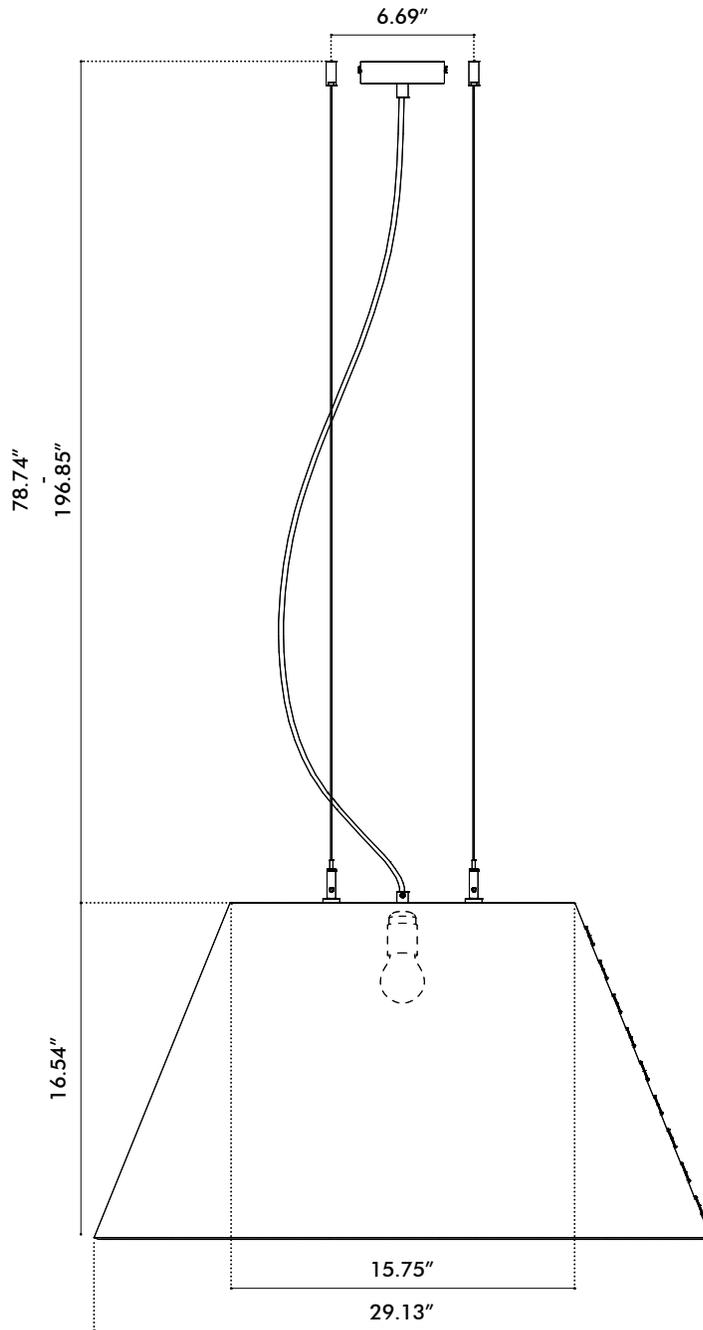


# BuzziShade Pendant LED Medium

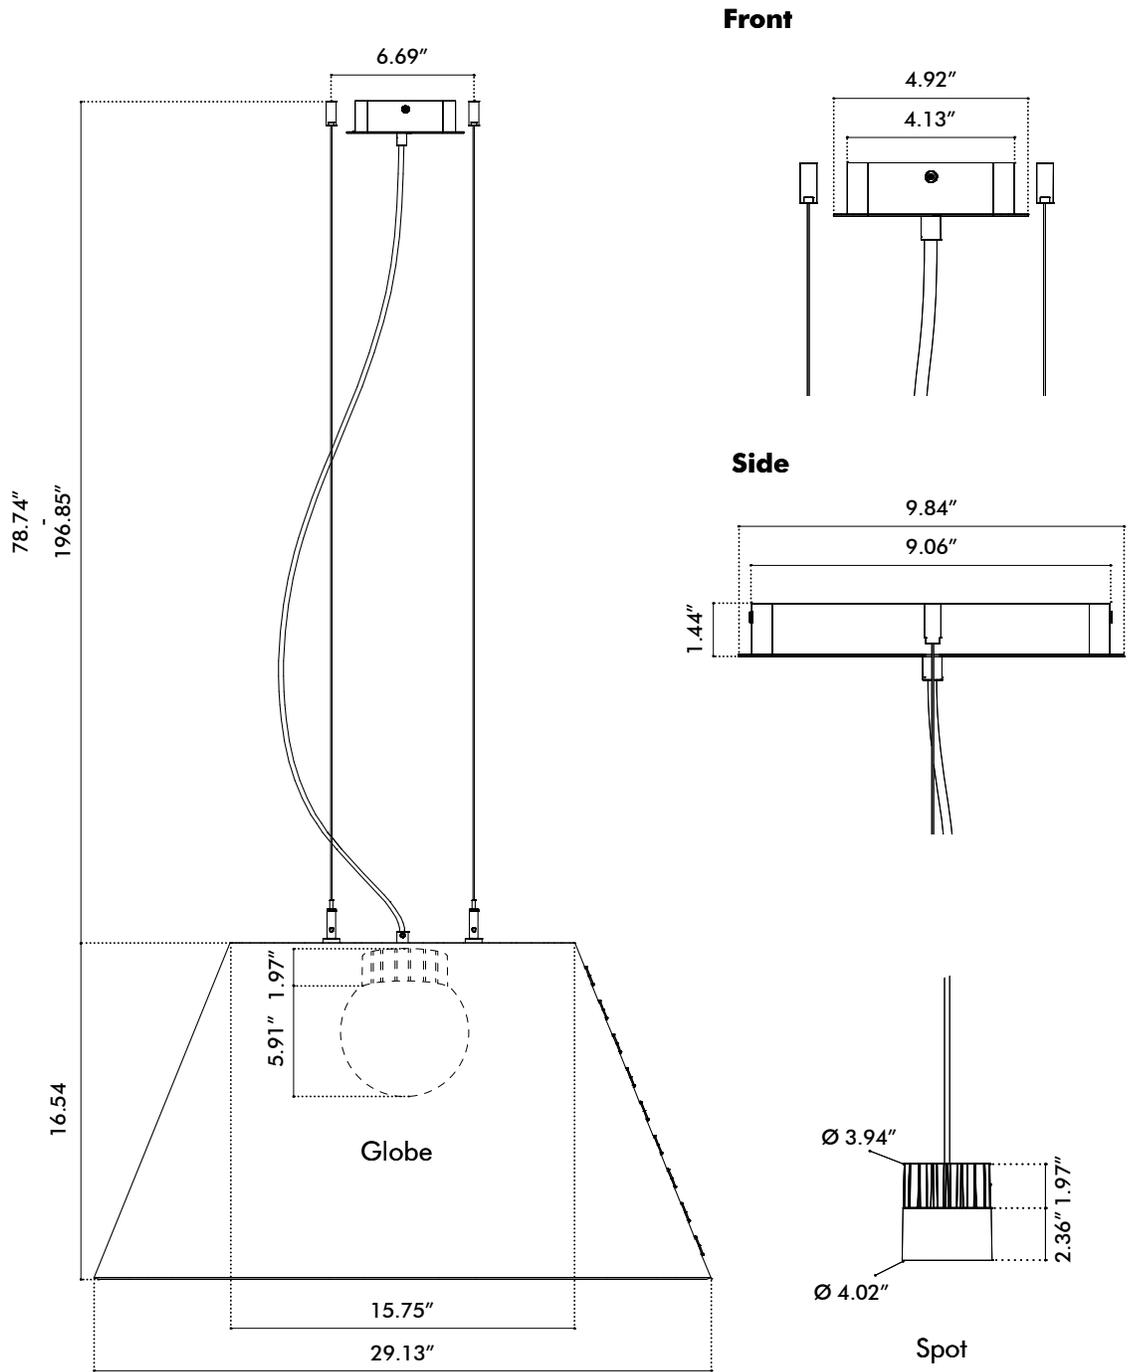


# BuzziShade Pendant Large

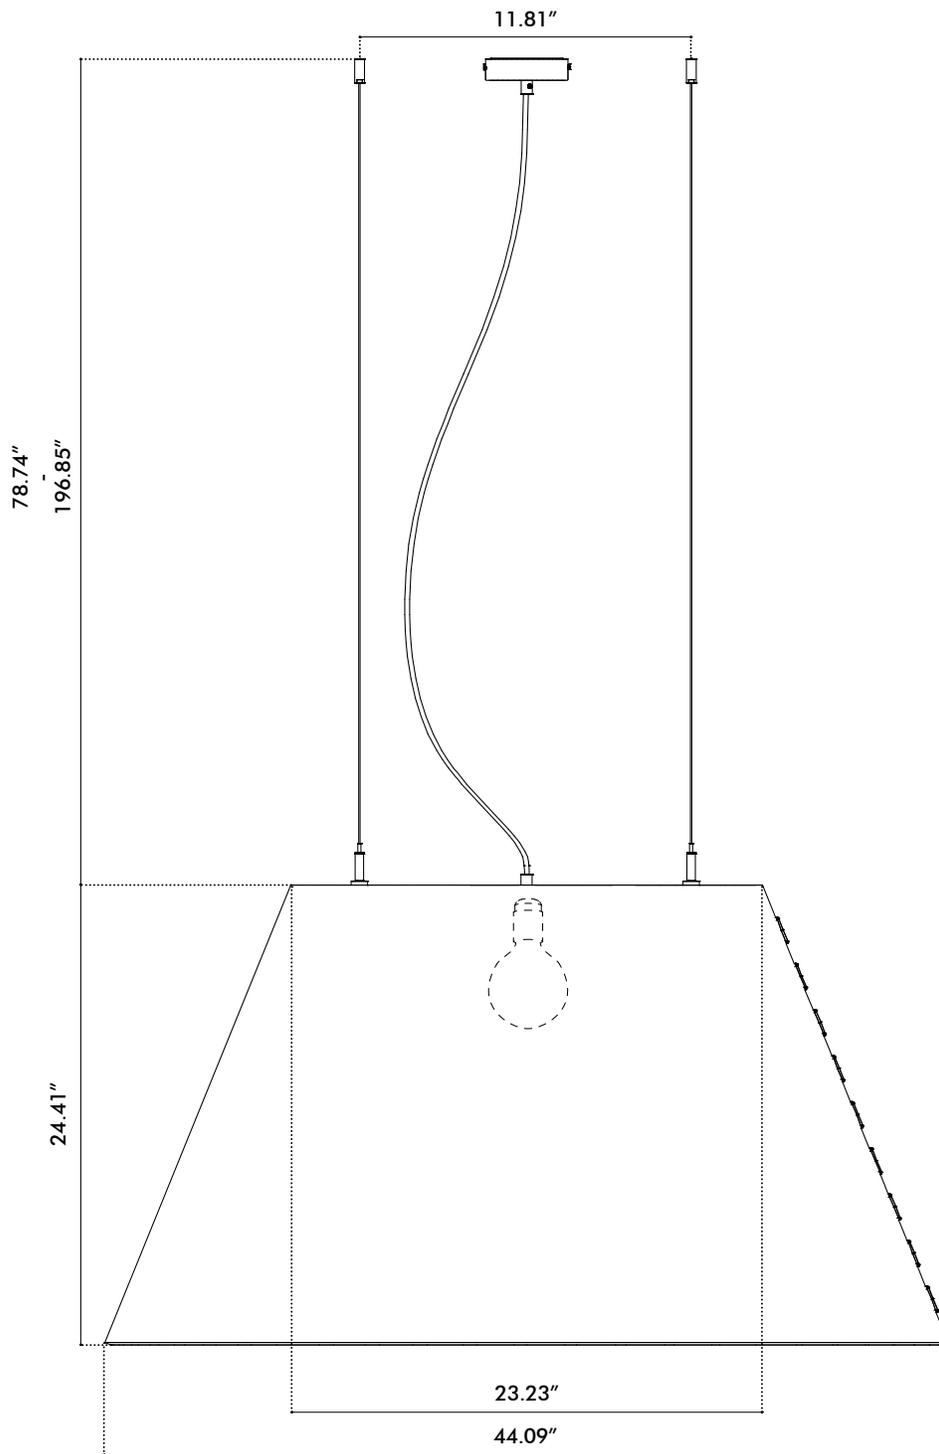


# BuzziShade Pendant LED Large

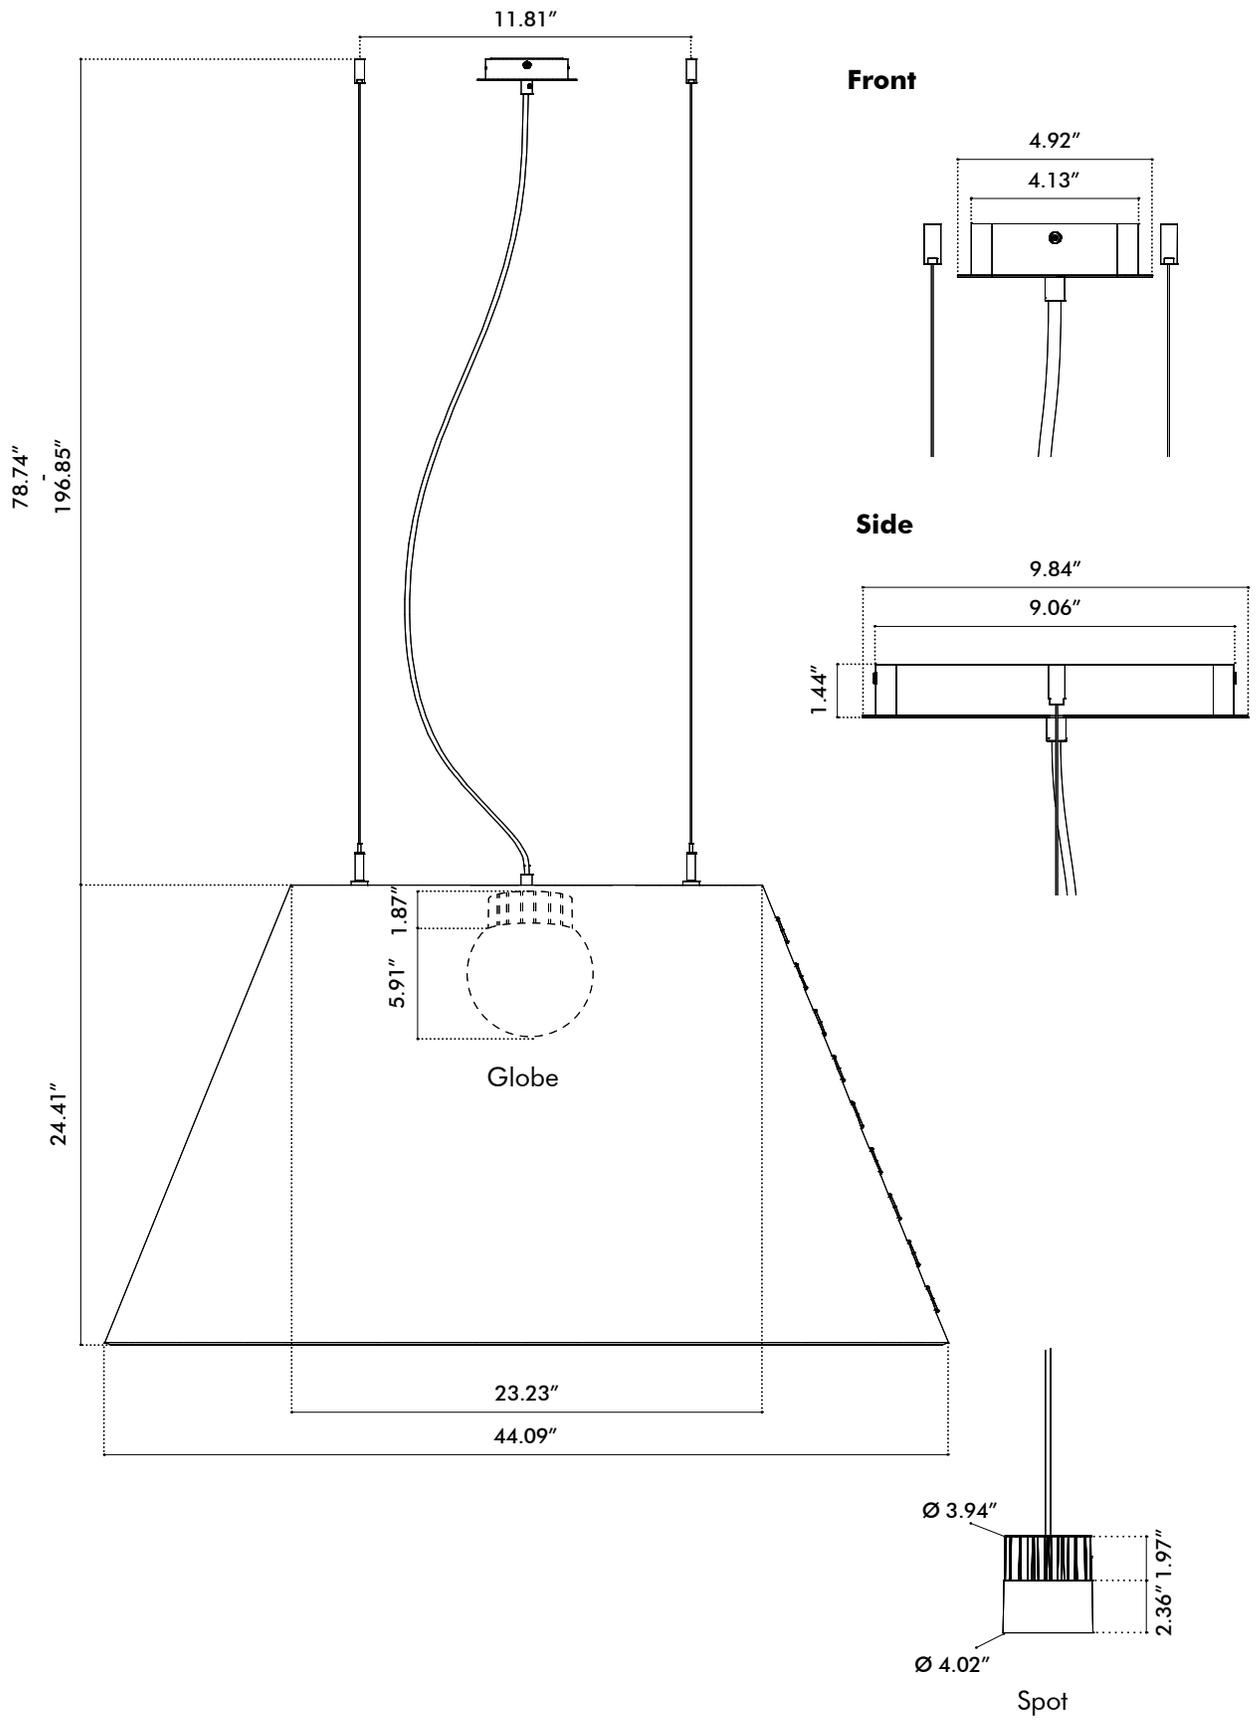

**BuzziShade XL**

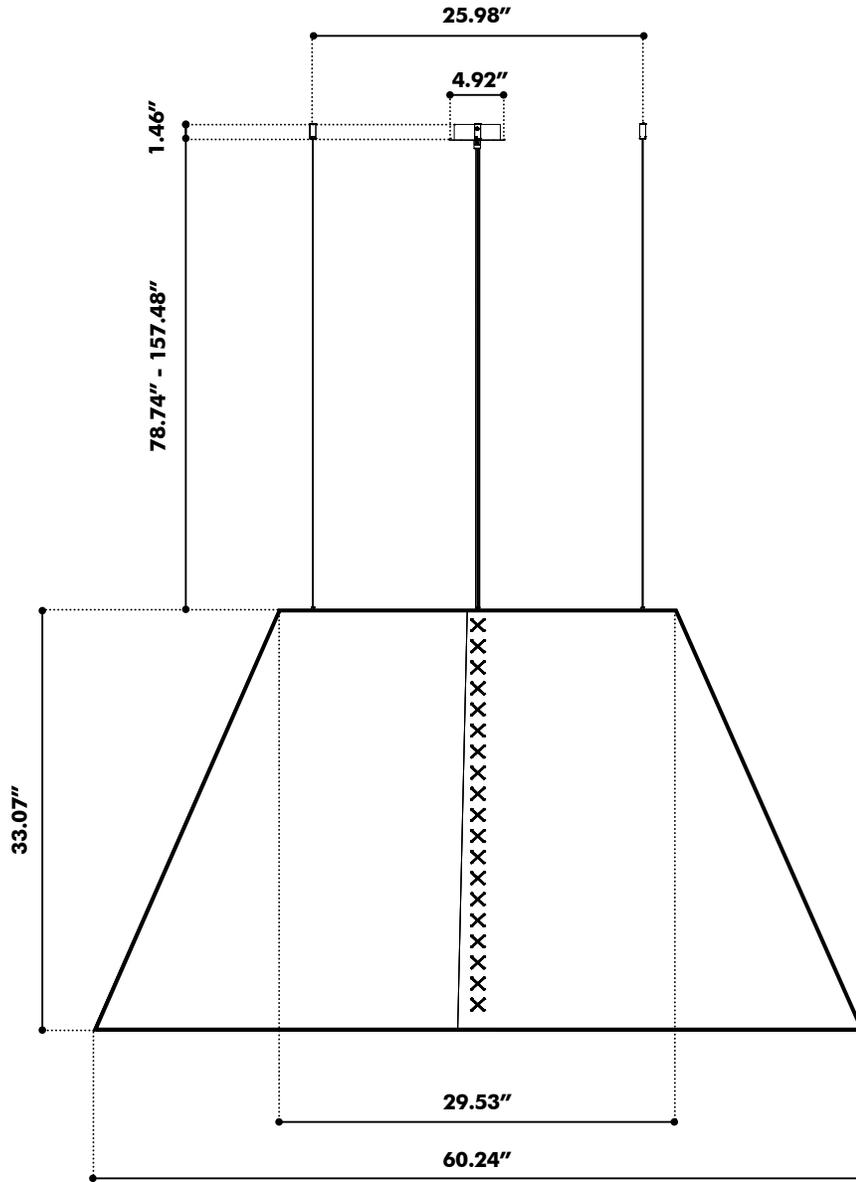


**BuzziShade XXL**

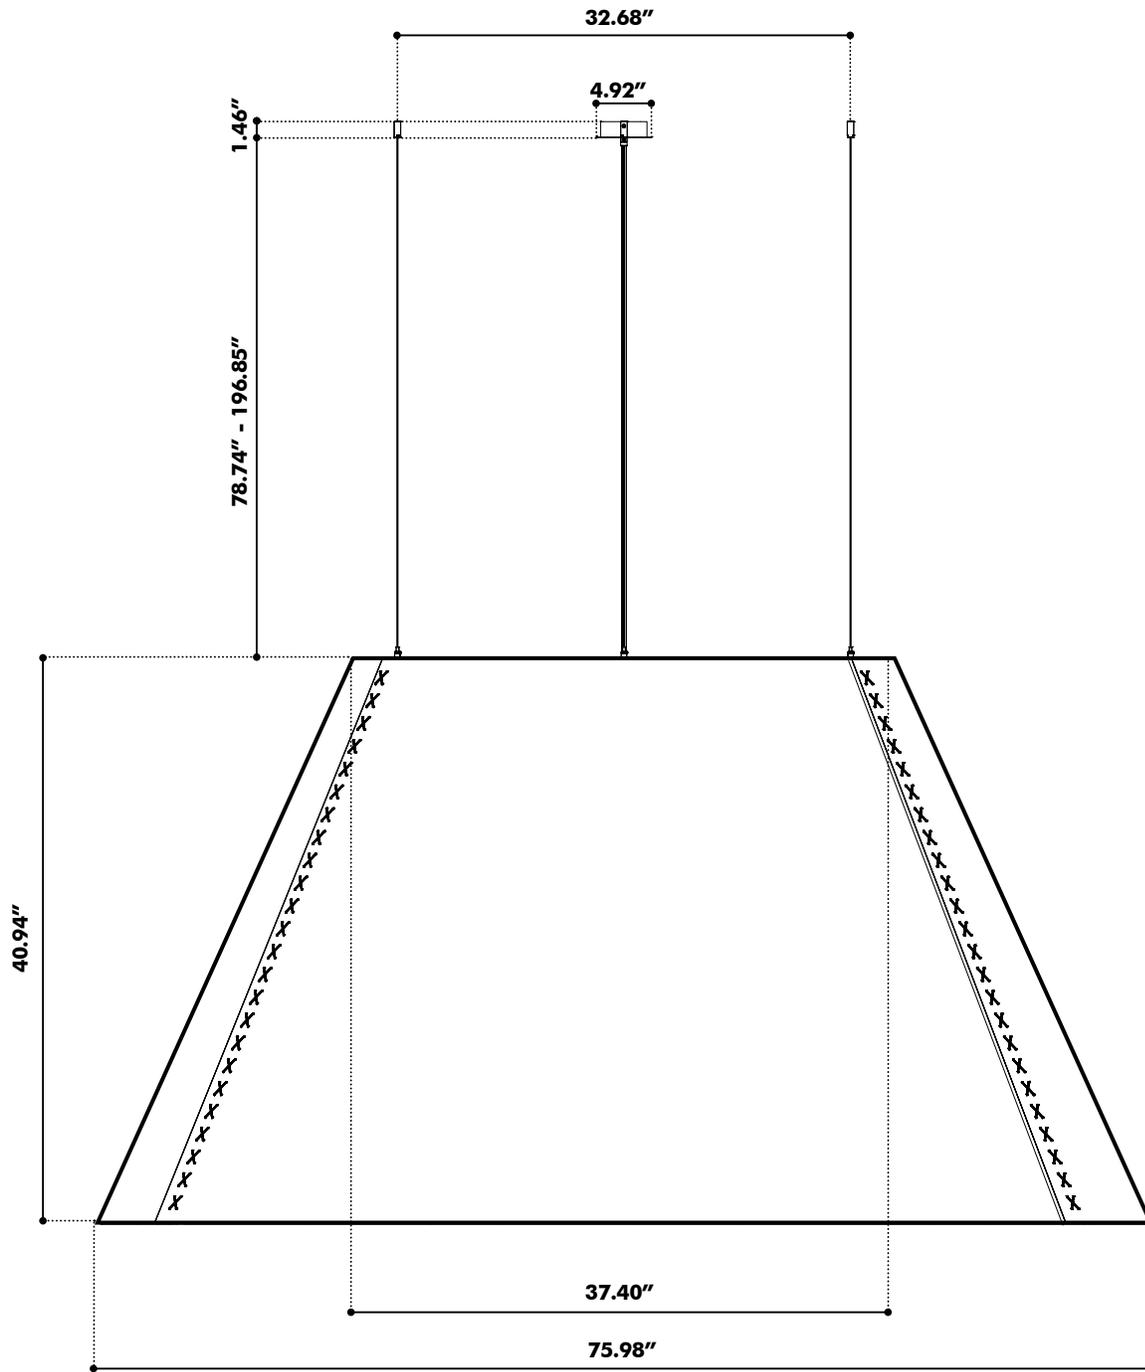

---


# Weights

## BuzziShade M Retrofit

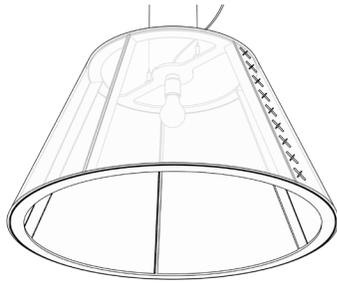


8.82 lbs

## BuzziShade L Retrofit

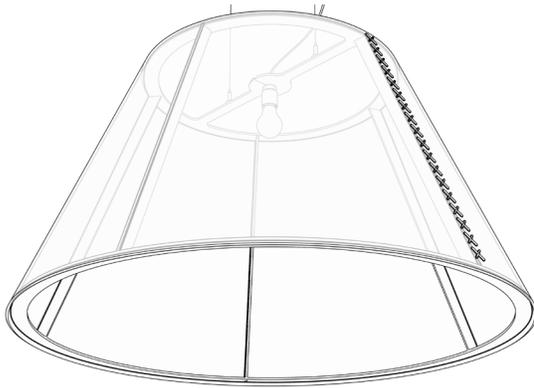


17.64 lbs

## BuzziShade M BuzziSol

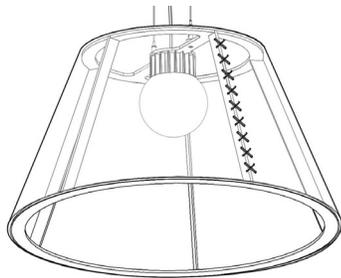


13.23 lbs

## BuzziShade L BuzziSol

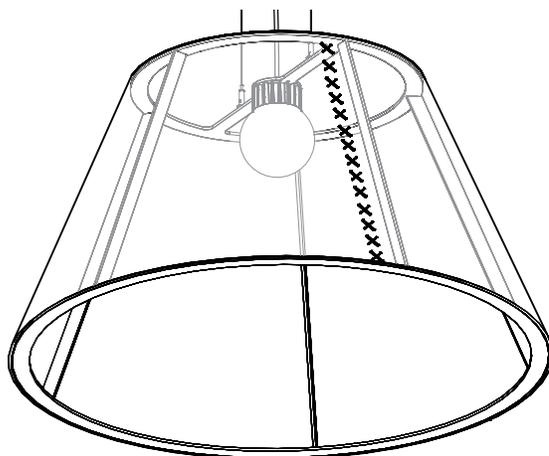


22.05 lbs

**BuzziShade XL**

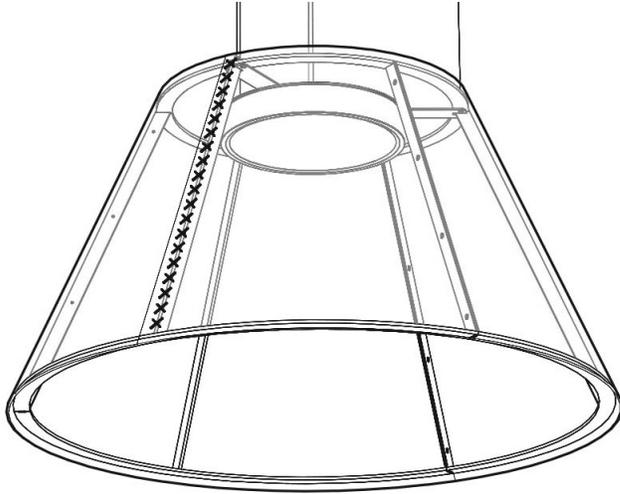

⚖️ 46.74 lbs

**BuzziShade XXL**

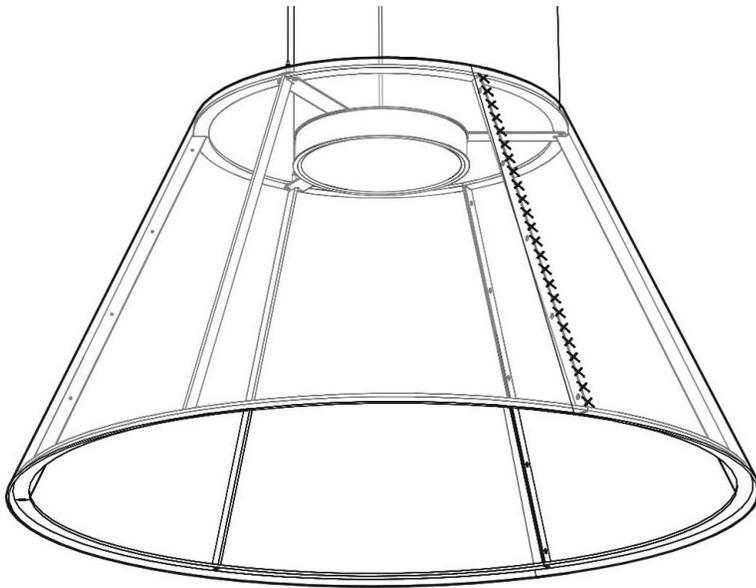


⚖️ 56.66 lbs

# Fabrics

---

## Felt (15 colors)

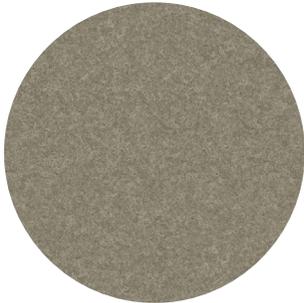

**Composition** 100% Recycled P.E.T. Felt, latex backing

**Weight** 1.000 g/m<sup>2</sup> | 29.49 oz/yd<sup>2</sup>

**Abrasion resistance** >7.000 Martindale

**Flammability** EU: EN 13501.1 + A1/2009 Class B-s1,d0


USA: ASTM E84 Class A certified

Bottle, Mustard, Mint, Nude: USA: ASTM E85 Class C Certified

**Fastness to light** USA 5



## Fabric (45 colors)

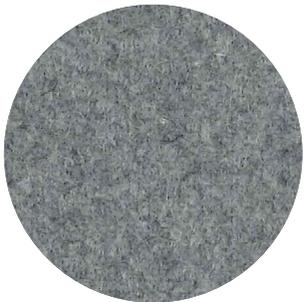

**Category** A

**Composition** 70% Recycled Wool, 25% Recycled Polyacryl,  
5% Recycled Other Fabrics

**Weight** 405 g/m<sup>2</sup> | 11.94 oz/yd<sup>2</sup>

**Abrasion resistance** 40.000 Martindale, 50,000 Wyzenbeek

**Flammability** EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette).

EN 1021.2/2006 | BS EN 1021.2/2006 (match)

USA: CAL TB 117 | ASTM E84 CLASS A

**Fastness to light** EU 4 | USA 4

**Fastness to rubbing** EU: Wet 3-4 | Dry 4-5

**Fastness to crocking** USA: Wet 5 | Dry 5

