

---

# BuzziFrontDesk

## Product Specification Sheet

---

This document contains technical information about the BuzziFrontDesk

---



[www.buzzi.space](http://www.buzzi.space)



## Frontpanel for worktop

This workspace divider safeguards your privacy at work or at home. Hide away your cable clutter and computer screen in an orderly fashion. Easy to install on any workstation.

Design by BuzziSpace Studio

---

## General

 BuzziFrontDesk

Cover: BuzziFelt



Filling: cardboard + poplar plywood

Fix: Powder coated metal in black (RAL 9005) or white (9010)



Min. W 100 cm D 3,5 cm H 90 cm | W 39.37" D 1.38" H 35.43"

Max. W 180 cm D 3,5 cm H 110 cm | W 70.87" D 1.38" H 43.31"



Dry use



Flat Packed

Desk mounted

Extra layer Fabric, Trevira CS, Reflect, Revive 1, Clara 2, Remix 3, Hero 2, Tonus 4, Arda, Memory 2

Bicolor (different color front - back)



Round or straight corner

Fix L, L-Plus, XL or XXL

---

## Certifications



---

## Acoustics



Absorption



Diffusion



Attenuation



Mid tone



High tone


---

## Content

Configurations	3
Components	4
Fabrics	5
Dimensions	8
Acoustics	10

---

## Configurations

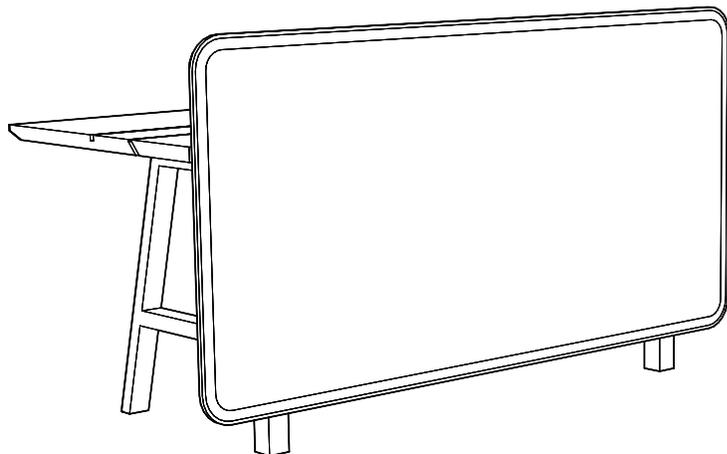

📌 BuzziFrontDesk

Cover: BuzziFelt



Filling: cardboard + poplar plywood

Fix: Powder coated metal in black (RAL 9005) or white (9010)



Min. W 100 cm D 3,5 cm H 90 cm | W 39.37" D 1.38" H 35.43"

Max. W 180 cm D 3,5 cm H 110cm | W 70.87" D 1.38" H 43.31"

Extra layer Fabric, Trevira CS, Reflect, Revive 1, Clara 2, Remix 3, Hero 2, Tonus 4, Arda, Memory 2



Bicolor (different color front - back)

Round or straight corner


Fix L, L-Plus, XL or XXL

# Components

---

## Round or straight edges

- Round or straight corner

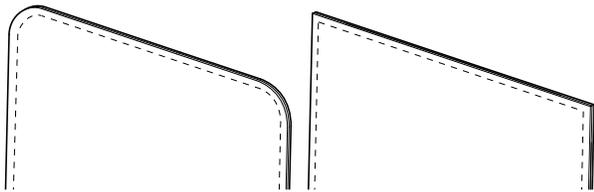

---

## BuzziFix



Desk Mounted

Powder coated metal Black (RAL 9005) or White (RAL 9010)

- L: Worktop: 12 > 27 mm 0.47" > 1.06"
- L Plus: Worktop: 18 > 43 mm 0.71" > 1.69"
- XL: Worktop: 28 > 57 mm 1.10" > 2.24"
- XXL: Worktop: 72 mm > 98 mm 2.83" > 3.86"  
(XXL applicable for PicNic desk front side)

---

## Distance holder




Additional distance holders are included and can be mounted at the front side to provide space for electrical cables etc.

(L 1,5 cm Ø 1,5 | L 0.59" Ø 0.59")



# Fabrics

## Felt (15 colors)

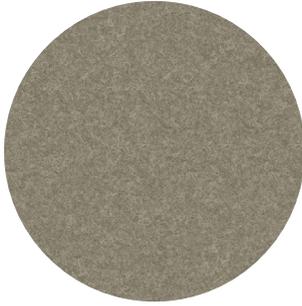

**Composition** 100% Recycled PE.T. Felt, latex backing

**Weight** 1.000 g/m<sup>2</sup> | 29.49 oz/yd<sup>2</sup>

**Abrasion resistance** >7.000 Martindale

**Flammability** EU: EN 13501.1 + A1/2009 Class B-s1,d0


USA: ASTM E84 Class A certified

Bottle, Mustard, Mint, Nude: USA: ASTM E85 Class C Certified

**Fastness to light** USA 5



## Fabric (45 colors)

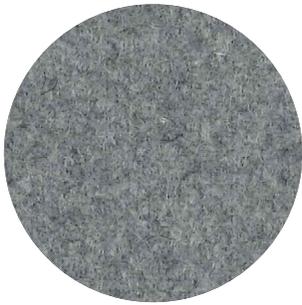

**Category** A

**Composition** 70% Recycled Wool, 25% Recycled Polyacryl,  
5% Recycled Other Fabrics

**Weight** 405 g/m<sup>2</sup> | 11.94 oz/yd<sup>2</sup>

**Abrasion resistance** 40.000 Martindale, 50,000 Wyzenbeek

**Flammability** EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette).

EN 1021.2/2006 | BS EN 1021.2/2006 (match)

USA: CAL TB 117 | ASTM E84 CLASS A


**Fastness to light** EU: 4 | USA 4

**Fastness to rubbing** EU: Wet 3-4 | Dry 4-5

**Fastness to crocking** USA: Wet 5 | Dry 5



## Trevira CS (47 colors)

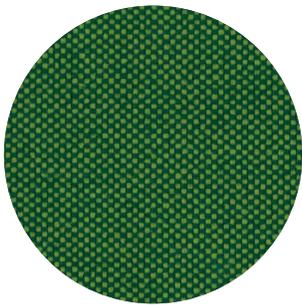

**Category** A

**Weight** 420 g/m<sup>2</sup> | 12.39 oz/yd<sup>2</sup>

**Composition** 100% Polyester, Trevira CS

**Abrasion resistance** 100.000 Martindale, 90,000 Wyzenbeek

**Flammability** BS 5852 part II: CRIB 5 | BS 7176 Medium Hazard

USA: CAL TB 117 | M1 | B1 | EN 1021/1-2 | C1 |

IMO Res. A652 (16)

**Fastness to light** EU: 6 | USA 5

**Fastness to rubbing** EU: Wet 4-5 | Dry 4-5

**Fastness to crocking** USA: Wet 5 | Dry 5



## Reflect (34 colors)

kvadrat



**Category** A

**Weight** 430 g/m<sup>2</sup> | 13.78 oz/yd<sup>2</sup>

**Composition** 100% Post-consumer recycled polyester

**Abrasion resistance** 100.000 Martindale

**Flammability** AS/NZS 3837 class 1 | ASTM E84 Class A Unadhered

ASTM E84 Class B Adhered | BS 5852 crib 5 with treatment

BS 5852 part 1 with treatment | EN 1021-1/2 | US Cal. Bull. 117-2013

**Fastness to light** Note 5-7, ISO 105-B02


**Fastness to rubbing** EU: Wet 5-5 | Dry 5-5

**Pilling** Note 4, EN ISO 12945



## Revive 1 (25 colors)

kvadrat

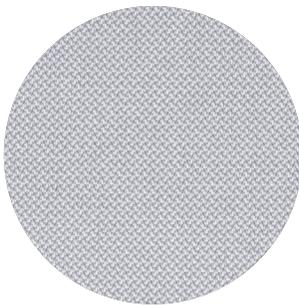

**Category** A

**Composition** 100% recycled polyester FR

**Weight** 430 g/lin.m

**Abrasion resistance** 60.000 Martindale rubs, EN ISO 12947

**Flammability** EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1

UNI 9175 11M | US Cal. Tech. Bull. 117

IMO A.652 (16)

**Fastness to light** Note 5-7, ISO 105-B02


**Fastness to rubbing** (ISO) dry 5, wet 4-5

**Pilling** Note 4-5, EN ISO 12945



## Clara 2 (24 colors)

kvadrat

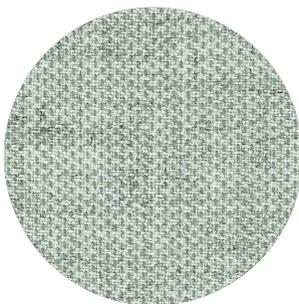

**Category** B

**Composition** 92% new wool, 8% nylon

**Weight** 400 g/lin.m

**Abrasion resistance** 80.000 Martindale rubs, EN ISO 12947

**Flammability** EN 1021-1/2 | BS 5852, ignition source 2-3 | DIN 4102 B2

NF D 60 013 | UNI 9175 11M | US Cal. Tech. Bull. 117, Sec. E

NFPA 260 | IMO A.652(16)

**Fastness to light** Note 5-7, ISO 105-B02

**Fastness to rubbing** (ISO) dry 4-5, wet 4

**Pilling** Note 4, EN ISO 12945



## Remix 3 (73 colors)

kvadrat



**Category** B

**Composition** 90% new wool, 10% nylon

**Weight** 415 g/lin.m

**Abrasion resistance** 100.000 Martindale rubs, EN ISO 12947

**Flammability** EN 1021-1/2 | BS 5852 part 1

Önorm B1/Q1 | NF D 60 013 | UNI 9175, 11M

AS/NZS 1530.3 | Cal. Tech. Bull. 117-2013

NFPA 260 | IMO FTP Code 2010:Part 8

**Fastness to light** Note 5-7, ISO 105-B02


**Fastness to rubbing** (ISO) dry 4-5, wet 4

**Pilling** Note 4, EN ISO 12945



## Hero 2 (33 colors)

kvadrat

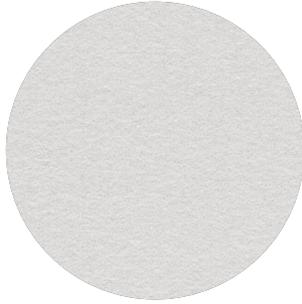

**Category C**

**Composition** 97% new wool, 3% nylon

**Weight** 580 g/lin.m

**Abrasion resistance** 45.000 Martindale rubs, EN ISO 12947

**Flammability** EN 1021-1/2 | DIN 4102 B2 | NF D 60 013  
UNI 9175 11M | US Cal. Bull. 117-2013 | NFPA 260  
IMO A.652 (16)

**Fastness to light** Note 5-6, ISO 105-B02

**Fastness to rubbing** (ISO) dry 4-5, wet 4-5

**Pilling** Note 3-4, EN ISO 12945



## Tonus 4 (47 colors)

kvadrat



**Category D**

**Composition** 90% new wool, 10% Helanca

**Weight** 665 g/lin.m

**Abrasion resistance** 100.000 Martindale rubs, EN ISO 12947

**Flammability** EN 1021-1/2 | BS 5852 part 1 | DIN 4102 B2  
Önorm B1/Q1 | NF D 60 013 | UNI 9175 11M  
US Cal. Bull. 117-2013 | NFPA 260 | IMO A.652 (16)

**Fastness to light** Note 5-7, ISO 105-B02

**Fastness to rubbing** (ISO) dry 3-5, wet 3-5

**Pilling** Note 3, EN ISO 12945



## Arda (12 colors)

kvadrat



**Category E**

**Composition** 70% new wool 21% polyester 9% nylon

**Weight** 800 g/lin. m | 25.8 oz/ly

**Abrasion resistance**

Approx. 50.000 Martindale rubs, EN ISO 12947

**Flammability** ASTM E84 Class A Unadhered | AS/NZS 3837 class 2 | BS 5852 part 1  
BS 5852 crib 5 | DIN 4102 B2 | EN 1021-1/2 | IMO FTP Code 2010 Part 8  
UNI 9175 11M | US Cal. Bull. 117-2013

**Fastness to light** Note 5-8, ISO 105-B02


**Fastness to rubbing** Dry note 3-5 ISO 105-X12  
Wet note 3-5 ISO 105-X12

**Pilling** Note 4, EN ISO 12945



## Memory 2 (20 colors)

kvadrat

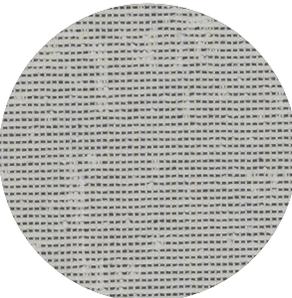

**Category** E

**Composition** 100% Trevira CS

**Weight** 700 g/lin.m

**Abrasion resistance**

35.000 rubs acc. to the Martindale method, EN ISO 12947

**Flammability** EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1  
NF D 60 013 | NF P 92 507 M1 | UNI 9175 11M  
UNI 9177 classe 1 | US Cal. Tech. Bull. 117  
IMO A.652 (16)

**Fastness to light** Note 5-8, ISO 105-B02



**Fastness to rubbing** (ISO) dry 4-5, wet 4-5

**Pilling** Note 4, EN ISO 12945



# Dimensions

## Panel

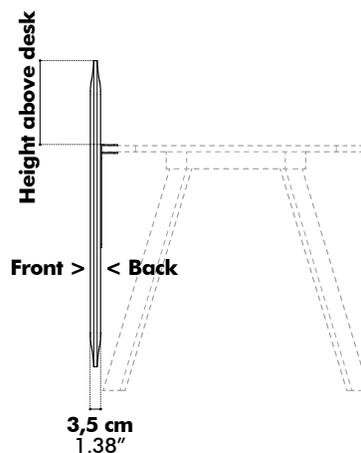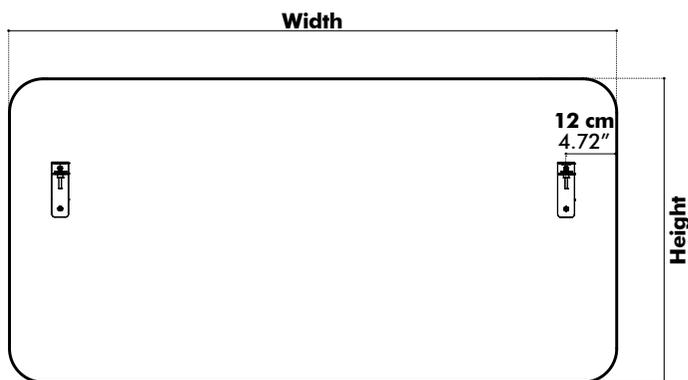

### Height above Desk

### Width

### Weight


Total height

Height above Desk		Width	Weight
<b>25 cm   9.84"</b>	<b>XS</b>	100 cm   39.37"	3,4 kg   7.5 lbs
90 cm   35.43"	<b>S</b>	120 cm   47.24"	4,1 kg   9.04 lbs
	<b>M</b>	140 cm   55.12"	4,8 kg   10.58 lbs
	<b>L</b>	160 cm   62.99"	5,5 kg   12.13 lbs
	<b>XL</b>	180 cm   70.87"	6,2 kg   13.67 lbs
<b>35 cm   13.78"</b>	<b>XS</b>	100 cm   39.37"	3,8 kg   8.38 lbs
100 cm   39.37"	<b>S</b>	120 cm   47.24"	4,6 kg   10.14 lbs
	<b>M</b>	140 cm   55.12"	5,4 kg   11.90 lbs
	<b>L</b>	160 cm   62.99"	6,1 kg   13.45 lbs
	<b>XL</b>	180 cm   70.87"	6,9 kg   15.21 lbs
<b>45 cm   17.72"</b>	<b>XS</b>	100 cm   39.37"	4,2 kg   9.26 lbs
110 cm   43.30"	<b>S</b>	120 cm   47.24"	5,1 kg   11.24 lbs
	<b>M</b>	140 cm   55.12"	5,9 kg   13.01 lbs
	<b>L</b>	160 cm   62.99"	6,7 kg   14.77 lbs
	<b>XL</b>	180 cm   70.87"	7,6 kg   16.76 lbs

# Fixes


## Fix L

Worktop: 12 > 27 mm | 0.47" > 1.06"

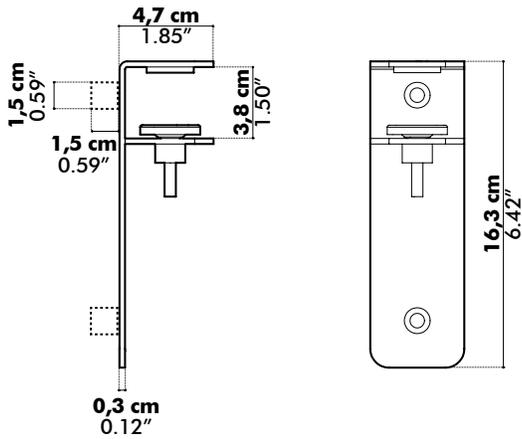


## Fix L Plus

Worktop: 18 > 43 mm | 0.71" > 1.69"

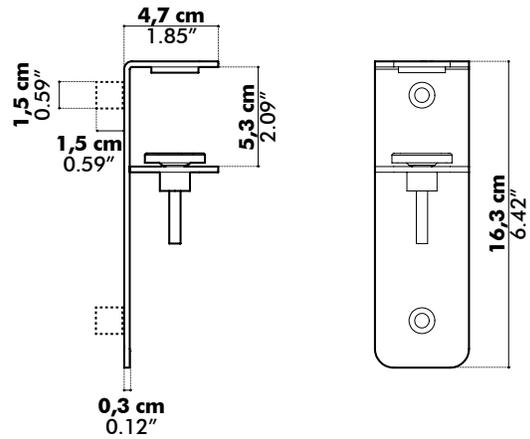


## Fix XL

Worktop: 28 > 57 mm | 1.10" > 2.24"

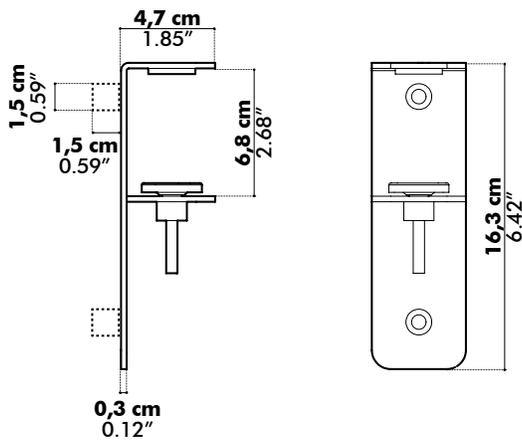

## Fix XXL


Worktop: 72 mm > 98 mm | 2.83" > 3.86"

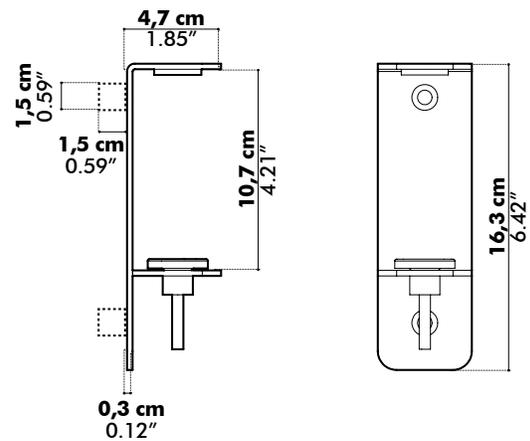

# Acoustics

## BuzziFrontDesk

Equivalent sound absorption area in m<sup>2</sup> per object

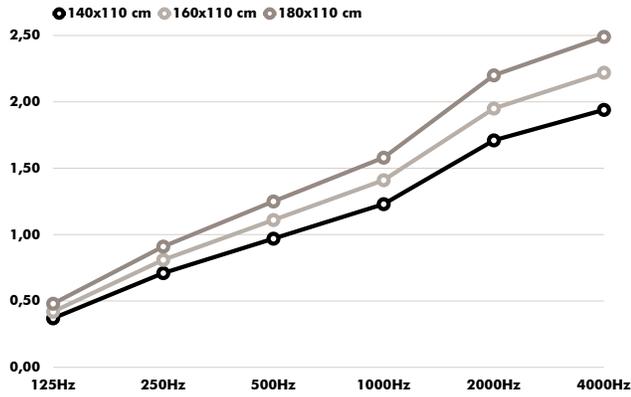

Hz	140x110 cm Aeq/m <sup>2</sup>	160x110 cm Aeq/m <sup>2</sup>	180x110 cm Aeq/m <sup>2</sup>
125	0.37	0.42	0.48
250	0.71	0.81	0.91
500	0.97	1.11	1.25
1000	1.23	1.41	1.58
2000	1.71	1.95	2.20
4000	1.94	2.22	2.49