




## Product Specification Sheet

### BuzziChicle Light US

— By Common Object Studio

#### Eco-Conscious Lighting with Acoustic Benefits

BuzziChicle Light is a soft, upholstered lighting fixture that adds a playful yet refined touch to any interior. Available in Round and Rectangular versions, it offers warm illumination while enhancing acoustic absorption. Made from 80% recycled jeans and free from foam or glue, it's a sustainable solution designed for visual and functional impact.




# The Family

## Models


### BuzziChicle Light Round

### BuzziChicle Light Rectangular

**LED Disk**  
Ø 450




**Sol Trio  
Retrofit**

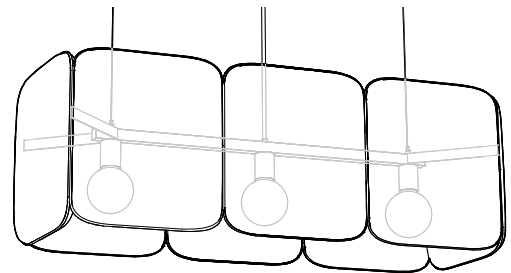


**Lighting Units**

**Sol Trio  
LED Spot**

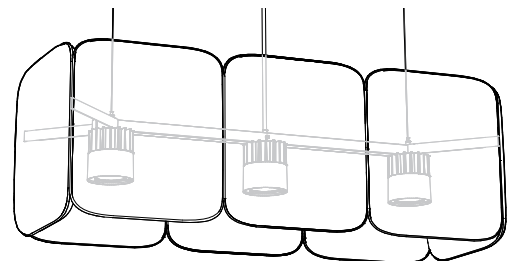

**Sol Trio  
LED Globe**

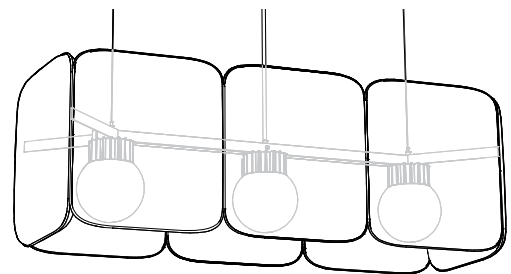

Required order information

1. Model
2. Mounting option
3. Input voltage
4. Light option
5. UGR
6. Color temperature
7. Dimming
8. Fabric Collection
9. Fabric Color
10. Cable Length
11. Cable Color

# Lighting Data

---

## Lighting Unit

### BuzziChicle Light Round: LED Disk



The BuzziChicle Light Round consist of a LED PCB solution containing mid power LED's to create an optimal light spread.

Select a milky diffuser to achieve a diffuse light surface without any dottiness. Or select a prismatic diffuser to achieve an UGR value of 19. LED dots will be visible.




UGR 22  
Milky Diffuser



UGR 19  
Prismatic Diffuser

### BuzziChicle Light Rectangular: Retrofit Lighting unit

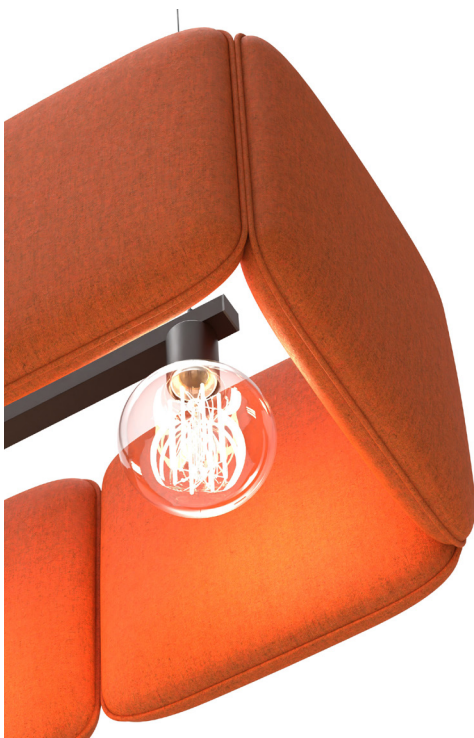

The BuzziChicle Light Rectangular Retrofit includes 3 x E26 fitting. Bulb Excluded, Max 60W

## BuzziChicle Light Rectangular: LED Lighting unit Globe



BuzziSol Trio is a suspended LED fixture consisting of 3 powder-coated black heatsinks with LED chip on board (COB) light source. The product can be finished with a frosted glass globe diffuser which spreads the light in a large beam angle of 170°, enlightening the surroundings or a reflector spot adaptor directing the light with a beam angle of 38° downwards.

## Spot



# BuzziChicle Light Lighting options

Model: Round

## Lighting Options

## Characteristics

## Mounting

Lighting Unit	Voltage Input	Color Temperature	UGR (Diffuser type)	Dimming	Technical	Visual	Options
LED Disk Ø 450	120V	3000K	22 (milky)	1-10V Dali	Power consumption: 35W Light output: 3170 Lm Efficacy: 91 Lm/W CRI: > 90	Black ceiling canopy and black power cable   White ceiling canopy and white power cable	Ceiling Suspended  Straight: 3 cables 78.74"   196.85" Alu or Black  Split: 1 cable splits in 3 78.74"   196.85" Alu or Black
			19 (prismatic)*	1-10V Dali	Power consumption: 35W Light output: 3600 Lm Efficacy: 103 Lm/W CRI: > 90		
	4000K	22 (milky)	1-10V Dali	Power consumption: 35W Light output: 3400 Lm Efficacy: 97 Lm/W CRI: > 90			
		19 (prismatic)*	1-10V Dali	Power consumption: 35W Light output: 3660 Lm Efficacy: 105 Lm/W CRI: > 90			
	3500K	22 (milky)	1-10V	Power consumption: 29W Light output: 2545 Lm Efficacy: 88 Lm/W CRI > 90			
	277V	3000K 3500K	22 (milky)	1-10V	Power consumption: 29W Light output: 2545 Lm Efficacy: 88 Lm/W CRI > 90		

\* To achieve a UGR 19, the product is fitted with a Prismatic diffuser instead of a milky diffuser. LED dots will be visible.



## Model: Rectangular

### Lighting Options

### Characteristics

### Mounting

Lighting Unit	Voltage Input	Characteristics		Mounting Options
		Technical	Visual	
Retrofit Trio	110-120V	Wattage: 3x Max. 60W	Black ceiling canopy and black power cable	2 cables of 78.74" or 196.85" Alu or Black

### Lighting Options

### Characteristics

### Mounting


Lighting Unit	Voltage Input	Color Temperature	Characteristics		Mounting Options
			UGR (Diffuser type)	Dimming	
LED Trio	100-240V/277V	2700K 3000K 3500K 4000K	23 (Globe)	1-10V	Black ceiling canopy and black power cable
			12 (Spot)	1-10V	



# Photometric Data


## BuzziChicle Light Round LED Disk Ø 450

LED Disk Ø 450 Cartesian diagram

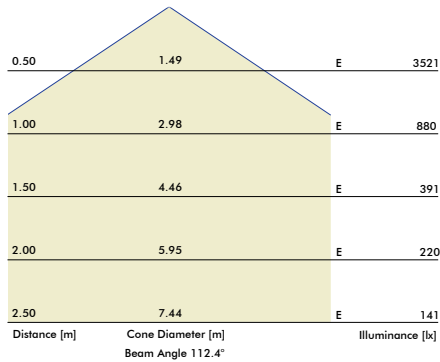


ref. model: LED Disk 450 3000K UGR 22

LED Disk Ø 450 Polar curve

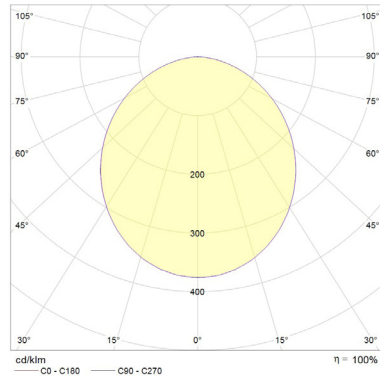


## BuzziChicle Light Rectangular LED Trio


Sol Trio Globe Cartesian diagram

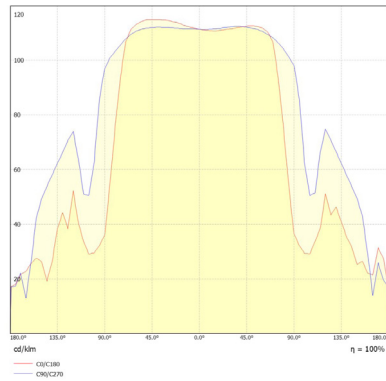


Sol Trio Globe Polar curve

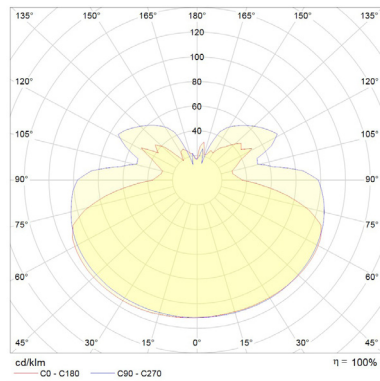

Sol Trio Spot Cartesian diagram

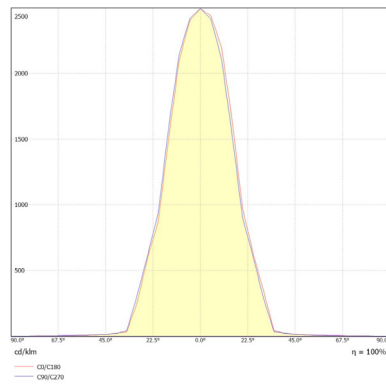

Sol Trio Spot Polar curve

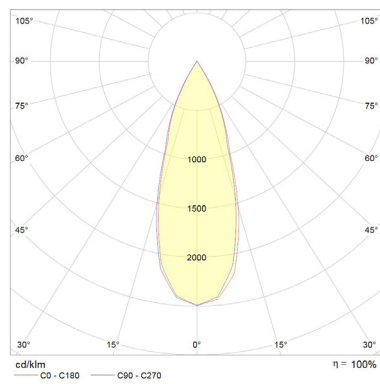


---

## Tips and Tricks - Light Options

To enlighten your workplace with optimal lux levels take following measurements into account:


### BuzziChicle Light Round LED Disk Ø 450

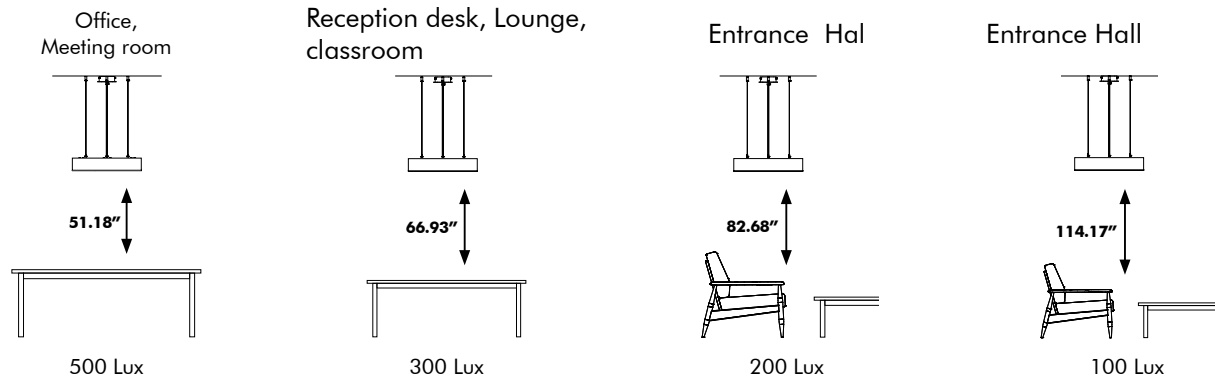


\* According to EN12464

### BuzziChicle Light Rectangular Sol Trio

#### Trio Spot

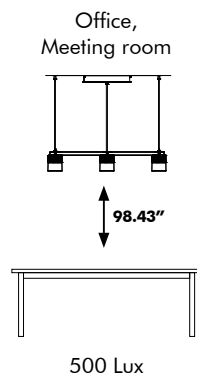

#### Trio Globe



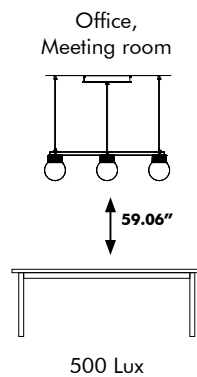


# Product Data

---



## Fixing System

### BuzziChicle Light Round Ceiling Suspended Split

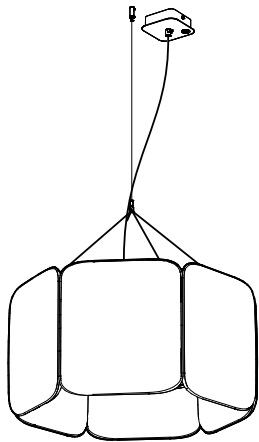



Ceiling Suspended Split  
Fixing System Screw with 3 split cables and 1 main cable, total length of 78.74" or 196.85"  
(black or alu)  
Min. distance of shade to ceiling is 19.69"

### BuzziChicle Light Round Ceiling Suspended Straight

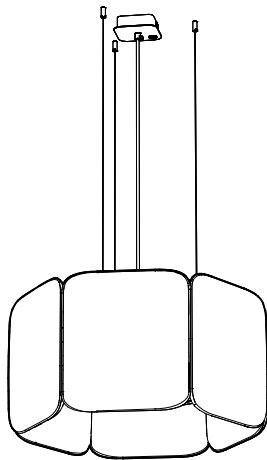

Ceiling Suspended Straight  
Fixing System Screw with 3 cables of 78.74" or 196.85" (black or alu)  
Min. distance of shade to ceiling is 3.94"

### BuzziChicle Light Rectangular Ceiling Suspended Straight



Ceiling Suspended Straight  
Fixing System Screw with 2 cables of 78.74" or 196.85" (black or alu)  
Min. distance of shade to ceiling is 3.94"

**▲** If installing on suspended ceiling, verify load capacity prior to installation.

---

## Acoustic Shade



The acoustic shade is upholstered top to bottom in a chosen fabric.

In BuzziChicle Light Round, the light source is wrapped with an upholstered ring in the same fabric as the acoustic shade.



Absorption



Diffusion



Mid tone



High tone

---

## Canopy and power cable



Ceiling canopy and power cable are available in two finishes for BuzziChicle Light Round:


Black (RAL 9005) powder coated metal ceiling canopy with black fabric power cable

White (RAL 9010) powder coated metal ceiling canopy with white fabric power cable



# Dimensions

## BuzziChicle Light Round


### Straight

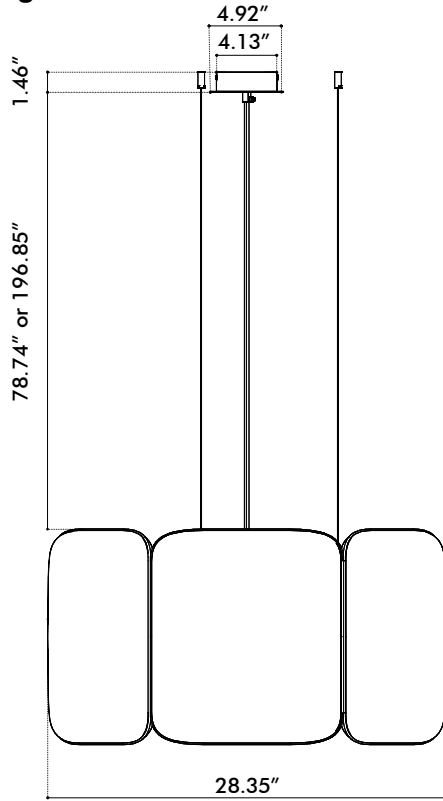


### Split

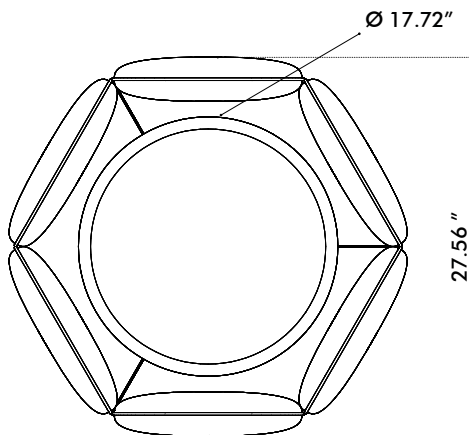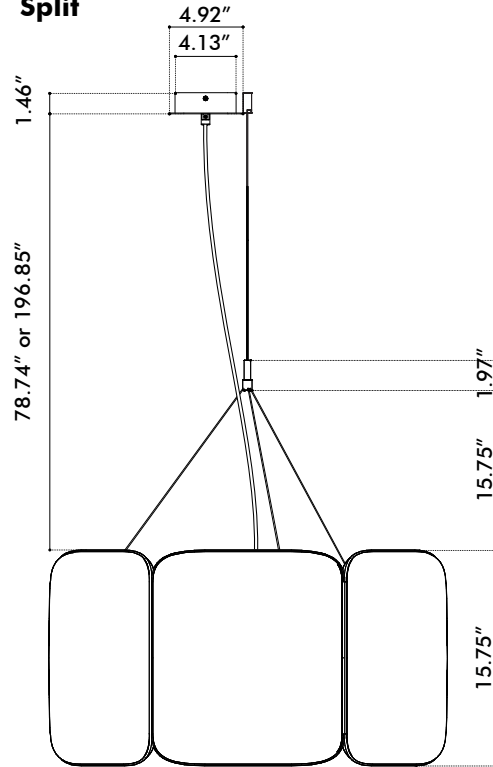


# BuzziChicle Light Rectangular LED

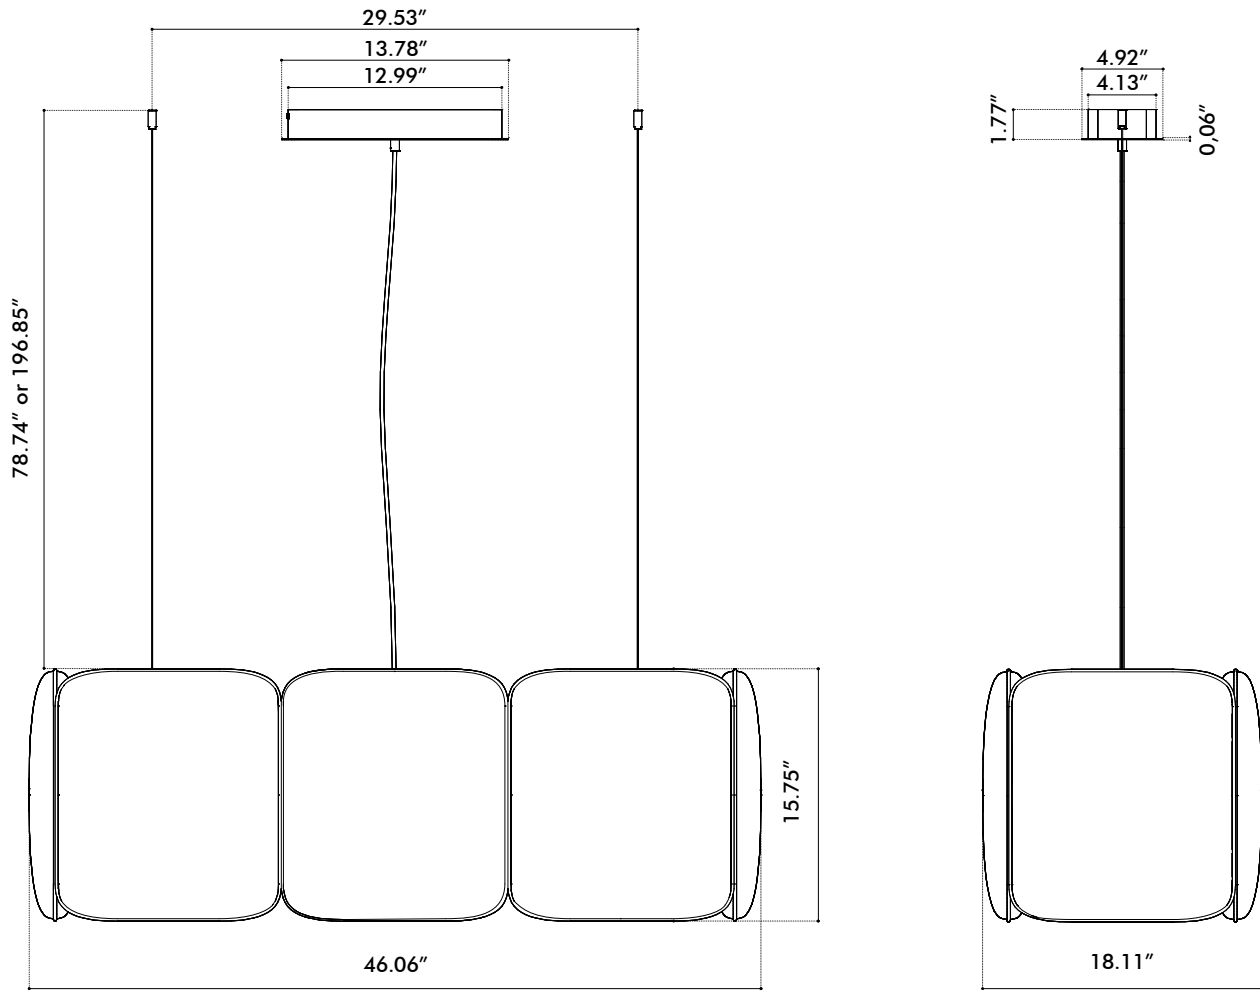


## Globe

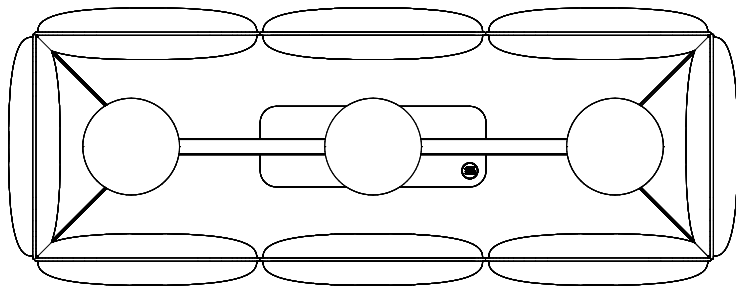

## Spot

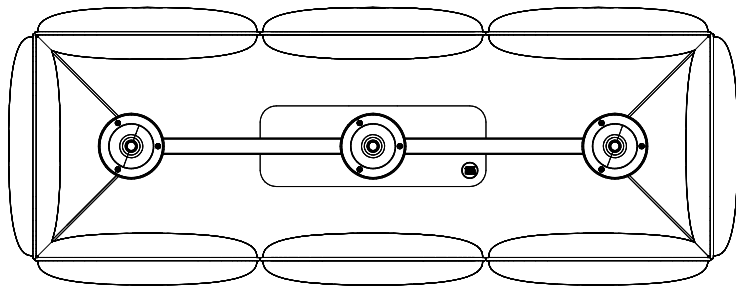


# BuzziChicle Light Rectangular Retrofit

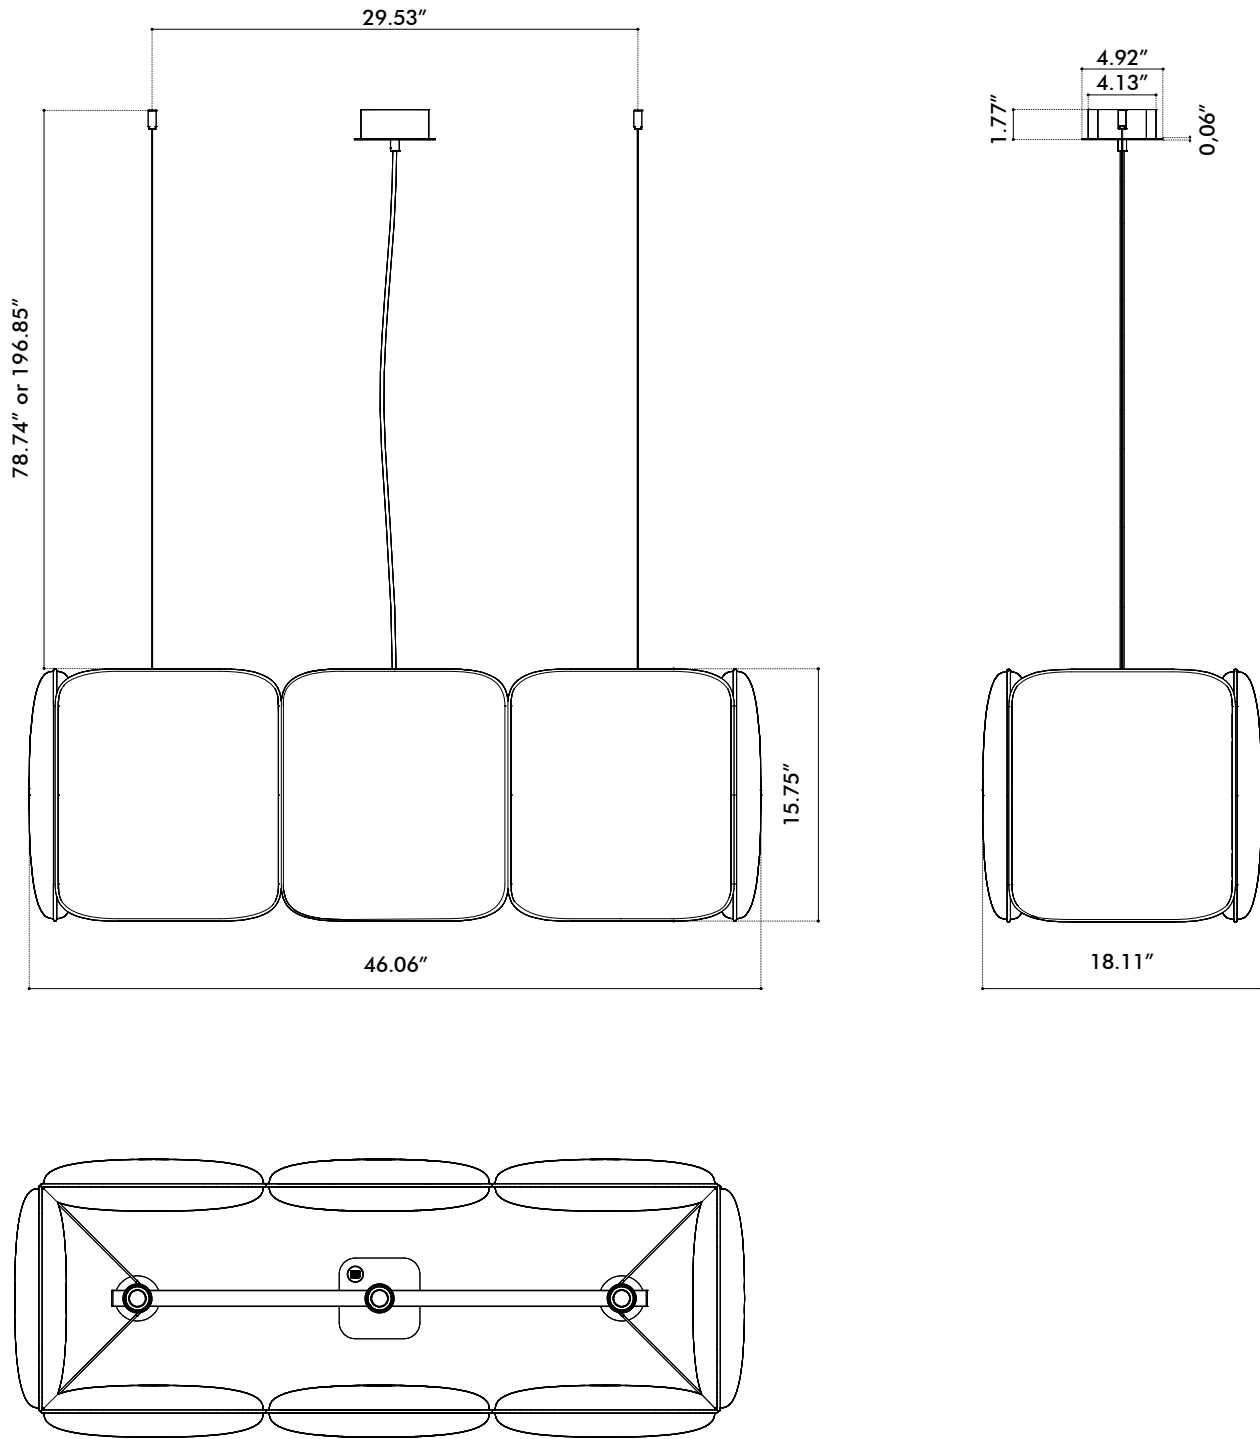

---


## Weights

### BuzziChicle Light Round

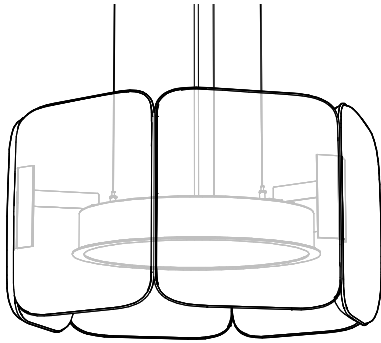


⚖️ 35.27 lbs

### BuzziChicle Light Rectangular Retrofit

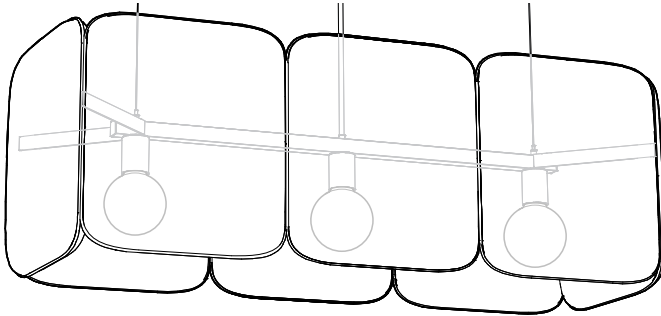


⚖️ 30.20 lbs

### BuzziChicle Light Rectangular LED Globe

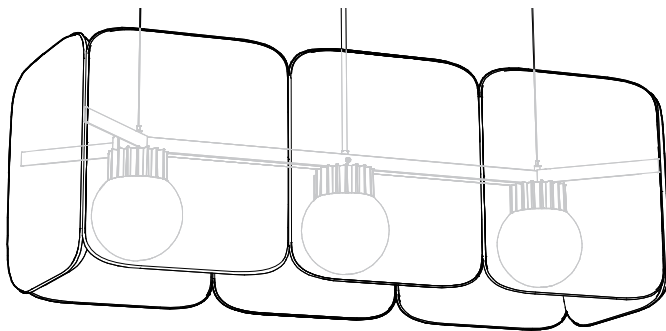

⚖️ 39.68 lbs


### BuzziChicle Light Rectangular LED Spot

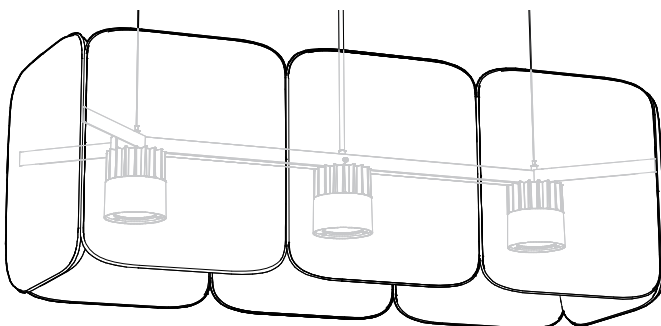

⚖️ 39.68 lbs

# Fabrics

## Fabric (45 colors)



**Category A**

**Composition** 70% Recycled Wool, 25% Recycled Polyacryl,  
5% Recycled Other Fabrics

**Weight** 405 g/m<sup>2</sup> | 11.94 oz/yd<sup>2</sup>

**Abrasion resistance** 40.000 Martindale, 50,000 Wyzenbeek

**Flammability** EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette).  
EN 1021.2/2006 | BS EN 1021.2/2006 (match)  
USA: CAL TB 117 | ASTM E84 CLASS A


**Fastness to light** EU: 4 | USA 4

**Fastness to rubbing** EU: Wet 3-4 | Dry 4-5

**Fastness to crocking** USA: Wet 5 | Dry 5



## Trevira CS (47 colors)



**Category A**

**Weight** 420 g/m<sup>2</sup> | 12.39 oz/yd<sup>2</sup>

**Composition** 100% Polyester, Trevira CS

**Abrasion resistance** 100.000 Martindale, 90,000 Wyzenbeek

**Flammability** BS 5852 part II: CRIB 5 | BS 7176 Medium Hazard  
USA: CAL TB 117 | M1 | B1 | EN 1021/1-2 | C1 |  
IMO Res. A652 (16)


**Fastness to light** EU: 6 | USA 5

**Fastness to rubbing** EU: Wet 4-5 | Dry 4-5

**Fastness to crocking** USA: Wet 5 | Dry 5



## Revive 1 (25 colors)



**Category A**

**Composition** 100% recycled polyester FR

**Weight** 430 g/lin.m

**Abrasion resistance** 60.000 Martindale rubs, EN ISO 12947

**Flammability** EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1  
UNI 9175 1IM | US Cal. Tech. Bull. 117  
IMO A.652 (16)

**Fastness to light** Note 5-7, ISO 105-B02


**Fastness to rubbing** (ISO) dry 5, wet 4-5

**Pilling** Note 4-5, EN ISO 12945



kvadrat

## Reflect (34 colors)



**Category A**

**Weight** 430 g/m<sup>2</sup> | 13.78 oz/yd<sup>2</sup>

**Composition** 100% Post-consumer recycled polyester

**Abrasion resistance** 100.000 Martindale

**Flammability** AS/NZS 3837 class 1 | ASTM E84 Class A Unadhered

ASTM E84 Class B Adhered | BS 5852 crib 5 with treatment

BS 5852 part 1 with treatment | EN 1021-1/2 | US Cal. Bull. 117-2013

**Fastness to light** Note 5-7, ISO 105-B02


**Fastness to rubbing** EU: Wet 5-5 | Dry 5-5

**Pilling** Note 4, EN ISO 12945



## Clara 2 (24 colors)

kvadrat



**Category B**

**Composition** 92% new wool, 8% nylon

**Weight** 400 g/lin.m

**Abrasion resistance** 80.000 Martindale rubs, EN ISO 12947

**Flammability** EN 1021-1/2 | BS 5852, ignition source 2-3 | DIN 4102 B2

NF D 60 013 | UNI 9175 11M | US Cal. Tech. Bull. 117, Sec. E

NFPA 260 | IMO A.652(16)

**Fastness to light** Note 5-7, ISO 105-B02

**Fastness to rubbing** (ISO) dry 4-5, wet 4

**Pilling** Note 4, EN ISO 12945



## Remix 3 (73 colors)

kvadrat



**Category B**

**Composition** 90% new wool, 10% nylon

**Weight** 415 g/lin.m

**Abrasion resistance** 100.000 Martindale rubs, EN ISO 12947

**Flammability** EN 1021-1/2 | BS 5852 part 1

Önorm B1/Q1 | NF D 60 013 | UNI 9175, 11M

AS/NZS 1530.3 | Cal. Tech. Bull. 117-2013

NFPA 260 | IMO FTP Code 2010:Part 8

**Fastness to light** Note 5-7, ISO 105-B02


**Fastness to rubbing** (ISO) dry 4-5, wet 4

**Pilling** Note 4, EN ISO 12945



## Hero 2 (33 colors)

kvadrat



**Category C**

**Composition** 97% new wool, 3% nylon

**Weight** 580 g/lin.m

**Abrasion resistance** 45.000 Martindale rubs, EN ISO 12947

**Flammability** EN 1021-1/2 | DIN 4102 B2 | NF D 60 013

UNI 9175 11M | US Cal. Bull. 117-2013 | NFPA 260

IMO A.652 (16)

**Fastness to light** Note 5-6, ISO 105-B02

**Fastness to rubbing** (ISO) dry 4-5, wet 4-5

**Pilling** Note 3-4, EN ISO 12945



## Tonus 4 (47 colors)

kvadrat



**Category** D

**Composition** 90% new wool, 10% Helanca

**Weight** 665 g/lin.m

**Abrasion resistance** 100.000 Martindale rubs, EN ISO 12947

**Flammability** EN 1021-1/2 | BS 5852 part 1 | DIN 4102 B2

Önorm B1/Q1 | NF D 60 013 | UNI 9175 11M

US Cal. Bull. 117-2013 | NFPA 260 | IMO A.652 (16)

**Fastness to light** Note 5-7, ISO 105-B02


**Fastness to rubbing** (ISO) dry 3-5, wet 3-5

**Pilling** Note 3, EN ISO 12945



## Arda (12 colors)

kvadrat



**Category** E

**Composition** 70% new wool 21% polyester 9% nylon

**Weight** 800 g/lin. m | 25.8 oz/ly

**Abrasion resistance**

Approx. 50.000 Martindale rubs, EN ISO 12947

**Flammability** ASTM E84 Class A Unadhered | AS/NZS 3837 class 2 | BS 5852 part 1

BS 5852 crib 5 | DIN 4102 B2 | EN 1021-1/2 | IMO FTP Code 2010 Part 8

UNI 9175 11M | US Cal. Bull. 117-2013

**Fastness to light** Note 5-8, ISO 105-B02

**Fastness to rubbing** Dry note 3-5 ISO 105-X12


Wet note 3-5 ISO 105-X12

**Pilling** Note 4, EN ISO 12945



## Memory 2 (20 colors)

kvadrat



**Category** E

**Composition** 100% Trevira CS

**Weight** 700 g/lin.m

**Abrasion resistance**

35.000 rubs acc. to the Martindale method, EN ISO 12947

**Flammability** EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1

NF D 60 013 | NF P 92 507 M1 | UNI 9175 11M

UNI 9177 classe 1 | US Cal. Tech. Bull. 117

IMO A.652 (16)

**Fastness to light** Note 5-8, ISO 105-B02

**Fastness to rubbing** (ISO) dry 4-5, wet 4-5


**Pilling** Note 4, EN ISO 12945



# Acoustics

## BuzziChicle Light

Equivalent sound absorption area in m<sup>2</sup> per object

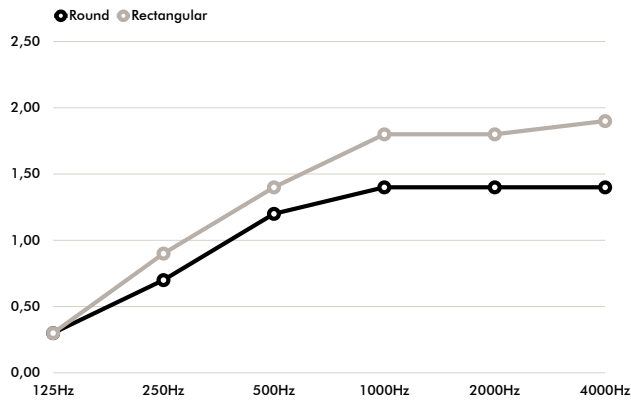

Hz	Round Aeq/m <sup>2</sup>	Rectangular Aeq/m <sup>2</sup>
125	0.30	0.30
250	0.70	0.90
500	1.20	1.40
1000	1.40	1.80
2000	1.40	1.80
4000	1.40	1.90