



BuzziTent

Product Specification Sheet

This document contains technical
information about the BuzziTent



www.buzzi.space

Circular by Nature. Acoustic by Design.

Designed by Alain Gilles, BuzziTent is a high-performance suspended acoustic ceiling element inspired by the rhythm and shelter of open-air tent structures. Engineered for superior mid-to-high frequency absorption, it creates quieter, calmer interiors while maintaining openness and architectural lightness. Crafted from 60% recycled PET felt and designed to be 100% disassemblable and recyclable, BuzziTent balances acoustic performance with a strong commitment to circular design.

Design by Alain Gilles

General



BuzziTent

Fixing: Ceiling Suspended



PET Felt

Black or Alu cables 2 m or 5 m | 78.74" or 196.85"



Optional: Deco Ridge in black

Optional: Ridge Connector in black



If installing on suspended ceiling, verify load capacity prior to installation.

Acoustics



Absorption



Mid tone




High tone

Content

Configurations	3
Fabrics	4
Components	5
Fixing System	6
Dimensions	7
Acoustics	8

Configuration

BuzziTent Ceiling Suspended

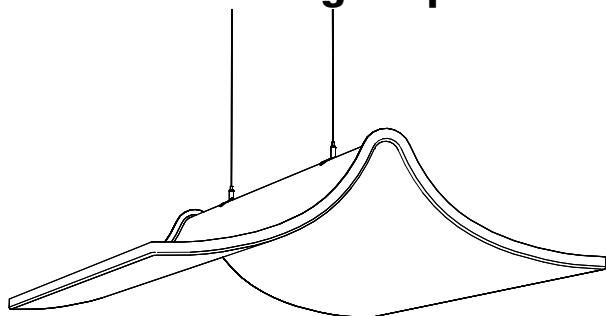

PET Felt



Length: 140 cm Width: 95 cm Height: 25 cm
Length: 55.12" Width: 37.40" Height: 0.98"



5,4 kg | 11.90 lbs

Black or Alu cables 2 m or 5m
78.74" or 196.85"



Optional: Deco Ridge
Ridge Connector



If installing on suspended ceiling, verify load
capacity prior to installation.

Fabrics

PET Felt

Composition 60% Recycled PET Felt


Weight 2.300 g/m² | 67.8 oz/yd²

Thickness 7 mm | 0.28"


Maintenance For dust removal light vacuuming with a soft nozzle is recommended on a regular basis. For stain removal, patch test on a concealed section first. Spot clean according to the industry standards.



Sage 20




Slate 32




Frost 58



Cream 63



Ochre 65



Smoke 71

Components

Acoustic Panel



Acoustic Panel in PET Felt

Deco Ridge (Optional)



Deco Ridge in black (RAL 9005)


It adds a refined metal accent to the acoustic panel.
Distance between deco ridge and the acoustic panel
is adjustable.

Ridge Connector (Optional)





Ridge Connector in black (RAL 9005)
It allows to link multiple BuzziTent (incl. Deco Ridge)
and BuzziTent Light models to create a continuous
configuration.

1 Ridge Connector = linking 2 models of BuzziTent
(incl. Deco Ridge) and/or BuzziTent Light

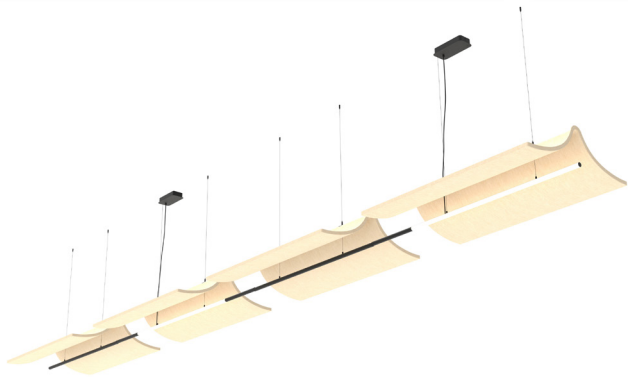

Fixing System


Ceiling Suspended

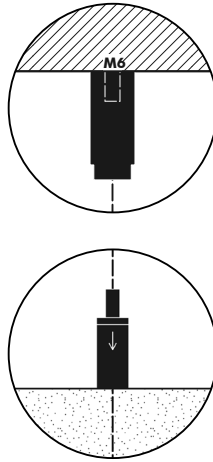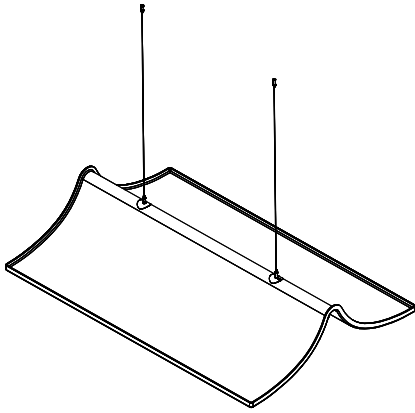

2 cables
2 m or 5 m | 78.74" or 196.85"
Black or Alu
Minimum distance of acoustic panel from ceiling is
10 cm | 4"




Black
Designer's choice

Alu






Dimensions


BuzziTent

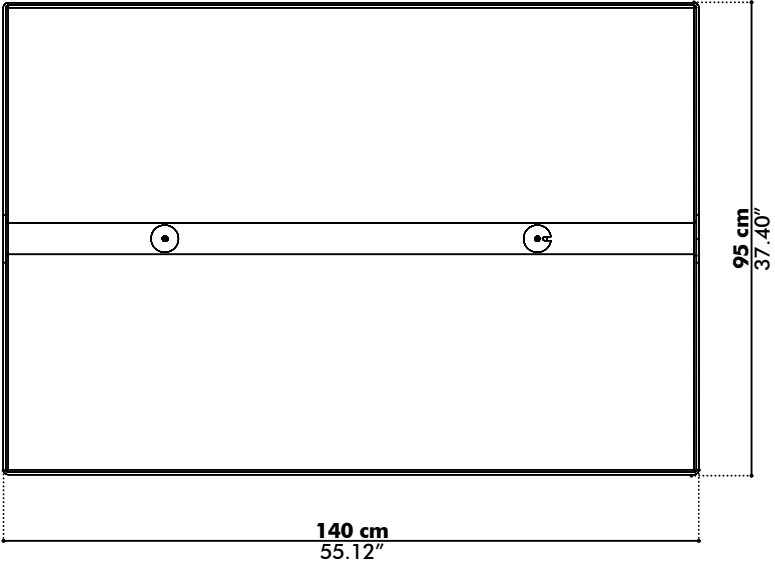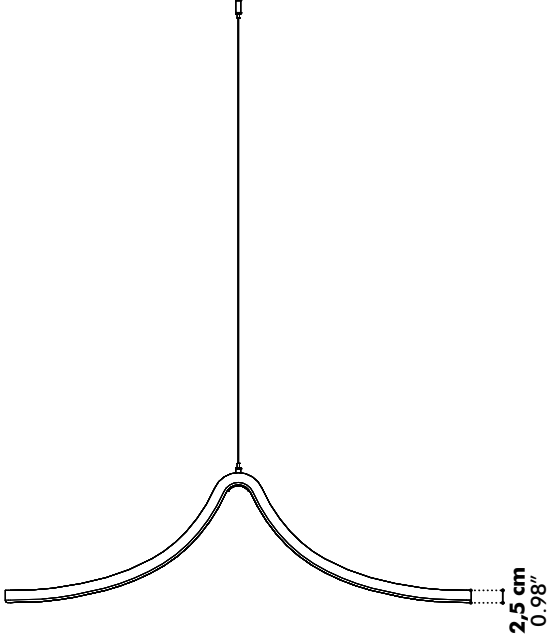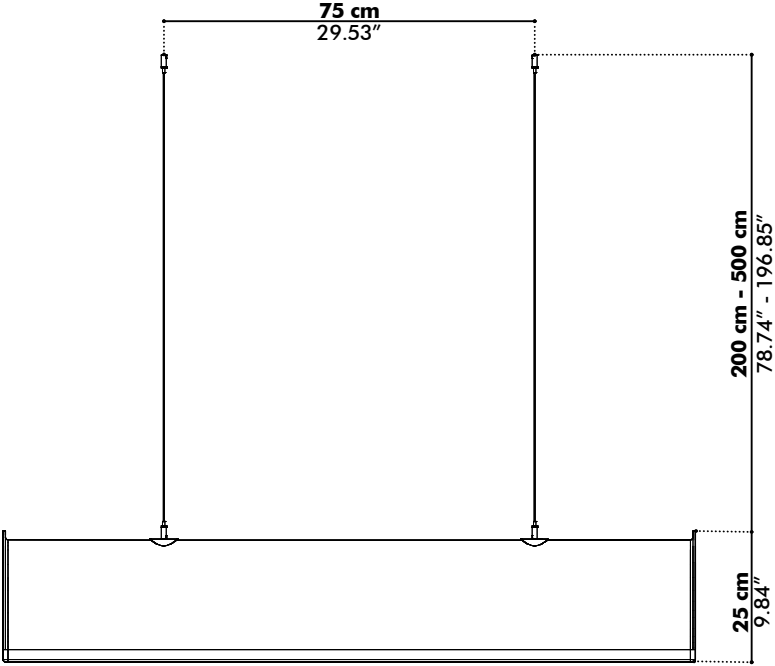

BuzziTent including Deco Ridge

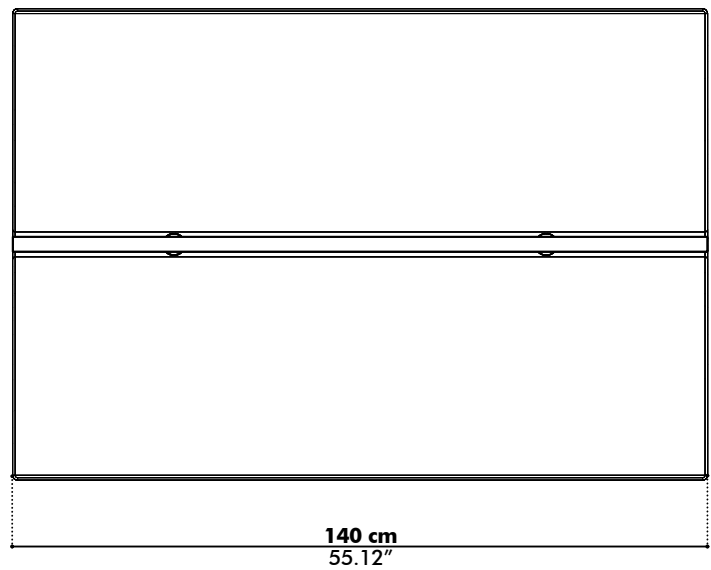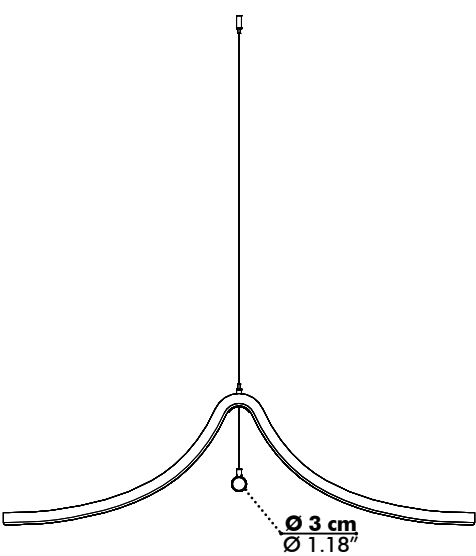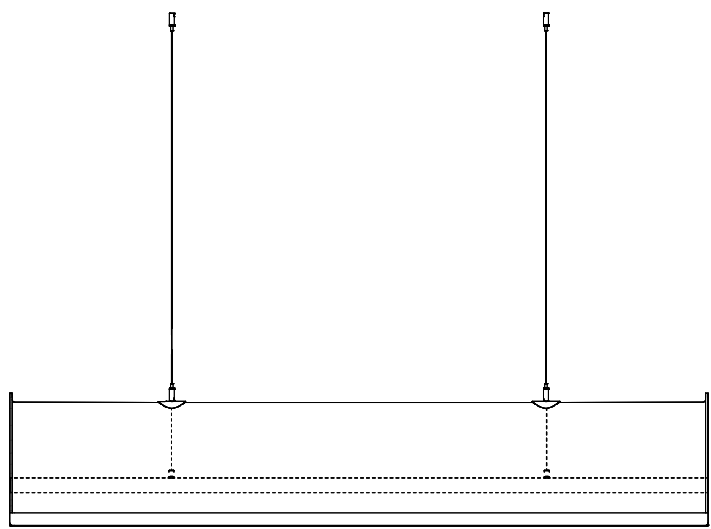


Ridge Connector

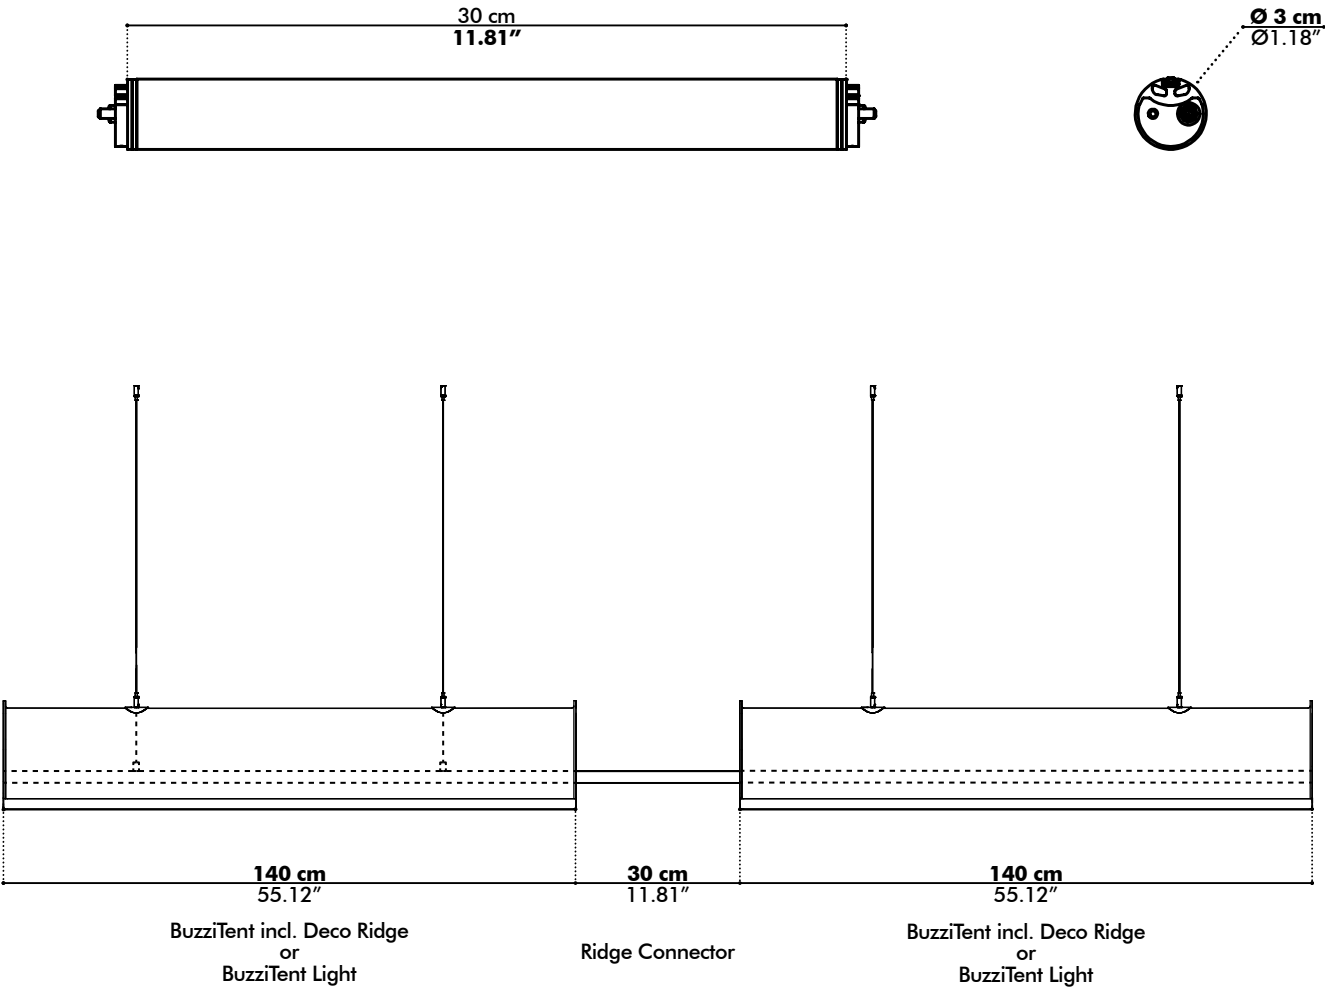

Acoustics

BuzziTent

Equivalent sound absorption area in m² per object

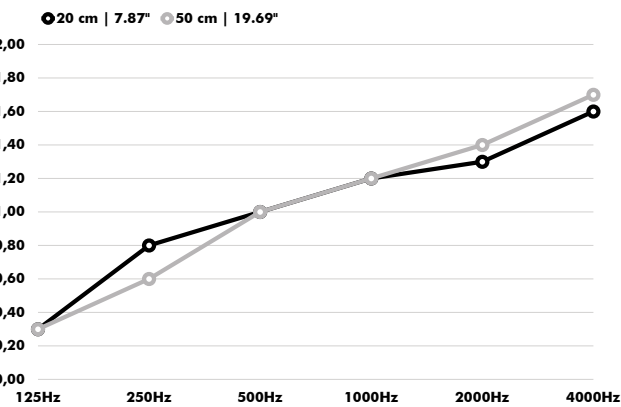

Hz	20 cm 7.87" From Ceiling Aeq/m²	50 cm 19.69" From Ceiling Aeq/m²
125	0.3	0.3
250	0.8	0.6
500	1.0	1.0
1000	1.2	1.2
2000	1.3	1.4
4000	1.6	1.7