
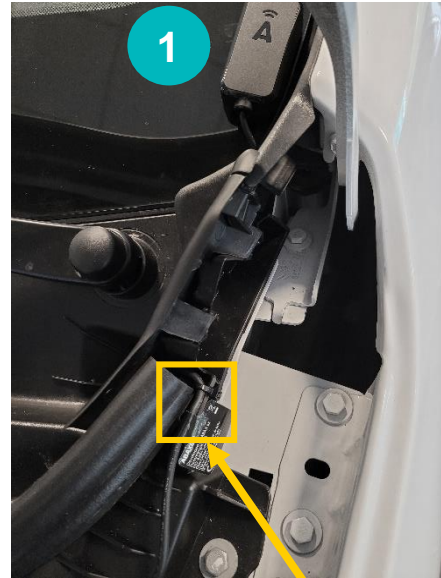
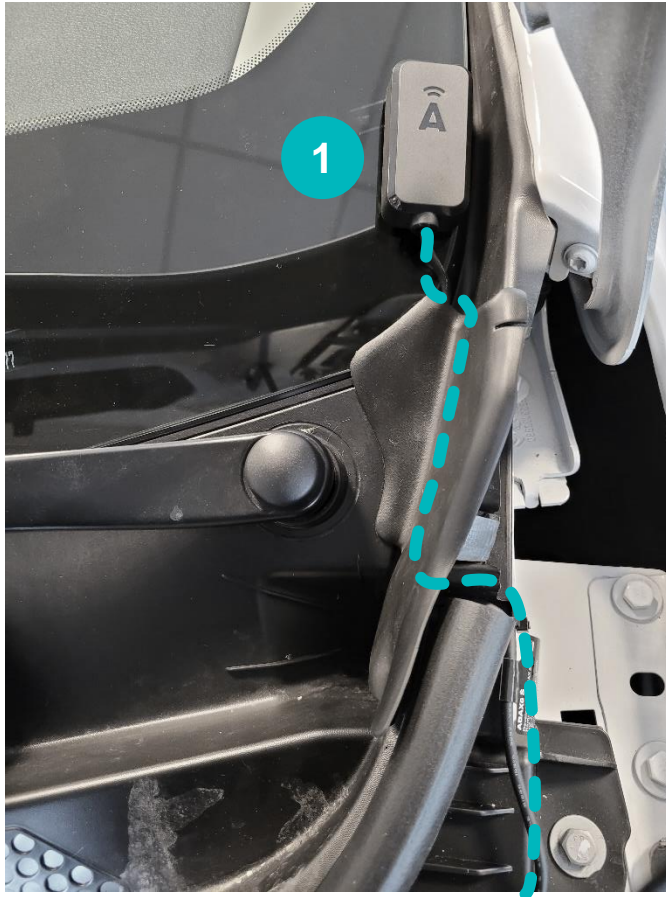







Citroën Jumpy 2017-

- 1 Location Triplog
- 2 Surplus Cable
- 3 +12V connection (red)
- 4 Ground connection (black)
-  Cable Routing



Make sure that the cable goes under the soft material. The rubber part can be easily removed.

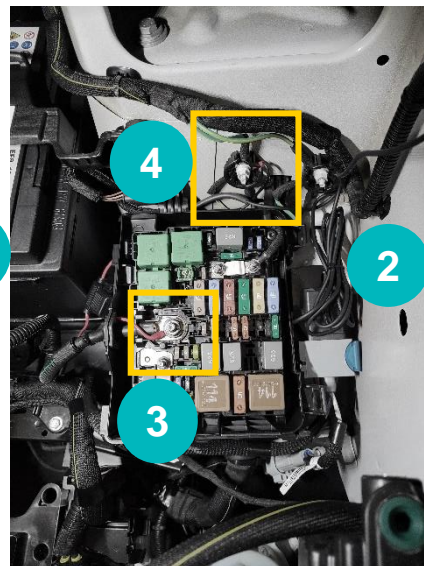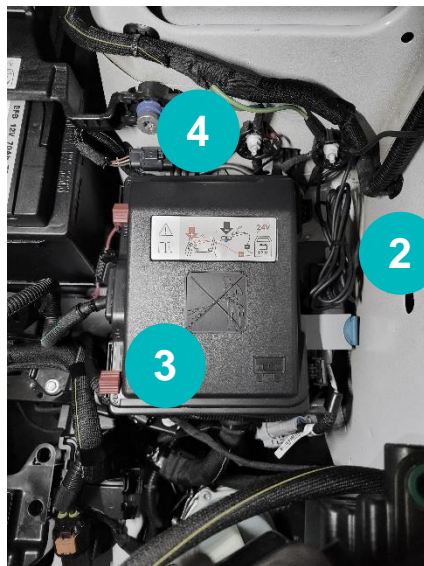

Remarks: The positive connection can be reached by removing the black plastic cover over the fuse box. Push the red wire between the rubber and the housing. Make sure that the cap is replaced correctly.