


Yoke Grade 8 Eye Container Hook BS EN 1677-1+2

The William Hackett Grade 8 forged lifting components are manufactured by YOKE from alloy steel in accordance with EN1677. All forged components are individually magnaflux crack detected after heat treatment, they are then individually proof load tested to 2.5 times working load limit in accordance with EN1677. Only components fully compliant with all aspects of EN1677 can be used in chain slings certified to EN818-4. The William Hackett Grade 8 lifting components are suitable for use in a temperature range of -40°C up to 200°C without reduction in working load limit.

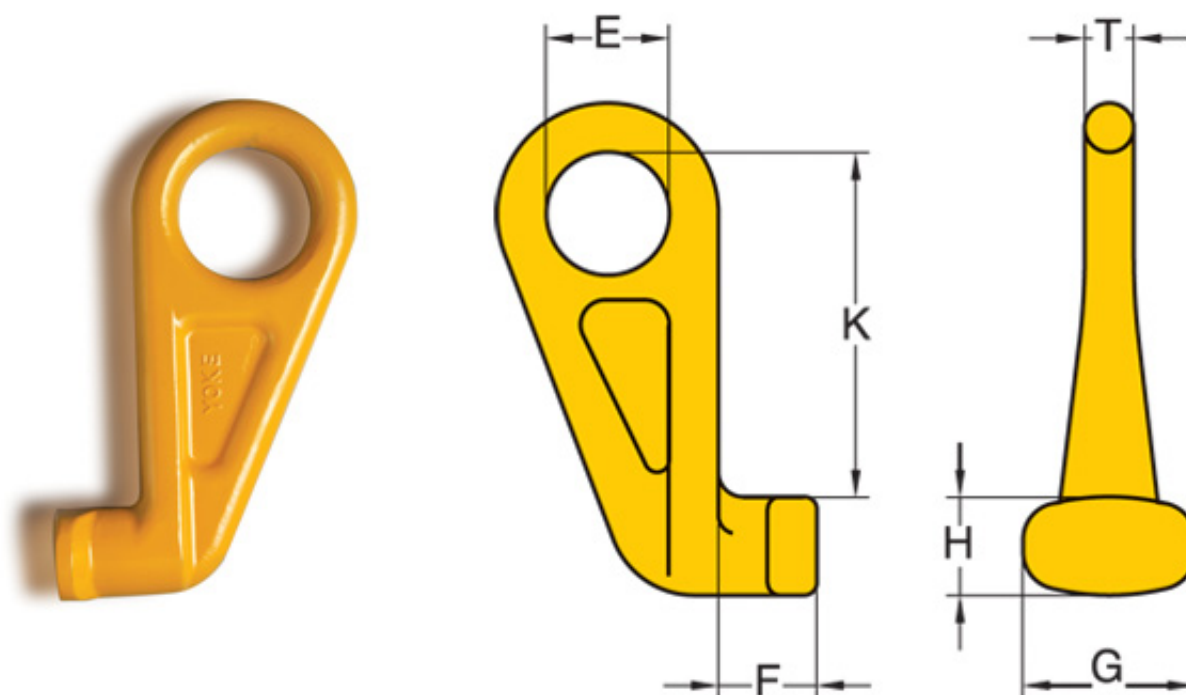

metric SPECIFICATIONS

Part Code	Chain Size mm	Desc	E mm	F mm	G mm	H mm	K mm	T mm	WLL tonnes	Box Quantity	Mass Kg
8-067-45LT	20	Left 45°	70	45	75	48	192	25	12.5	6	3.9
8-067-45RH	20	Right 45°	70	45	75	48	192	25	12.5	6	3.9

IMPERIAL SPECIFICATIONS

Part Code	Chain Size inch	Desc	E inch	F inch	G inch	H inch	K inch	T inch	WLL ils	Box Quantity	Mass lbs
8-067-45LT	3/4	Left 45°	2.76	1.81	2.95	1.89	7.56	0.98	28000	6	8.6
8-067-45RH	3/4	Right 45°	2.76	1.81	2.95	1.89	7.56	0.98	28000	6	8.6