


Yoke Grade 10 Eye Self Locking Hook

The William Hackett Grade 10 forged lifting components are manufactured by YOKE from alloy steel in accordance with EN1677. All forged components are individually magnaflux crack detected after heat treatment, they are then individually proof load tested to 2.5 times working load limit in accordance with EN1677. Only components fully compliant with all aspects of EN1677 can be used in chain slings certified to EN818-4. The William Hackett Grade 10 lifting components are suitable for use in a temperature range of -40°C up to 200°C without reduction in working load limit. Testing according to ASTM A952/A - DIN PAS 1061

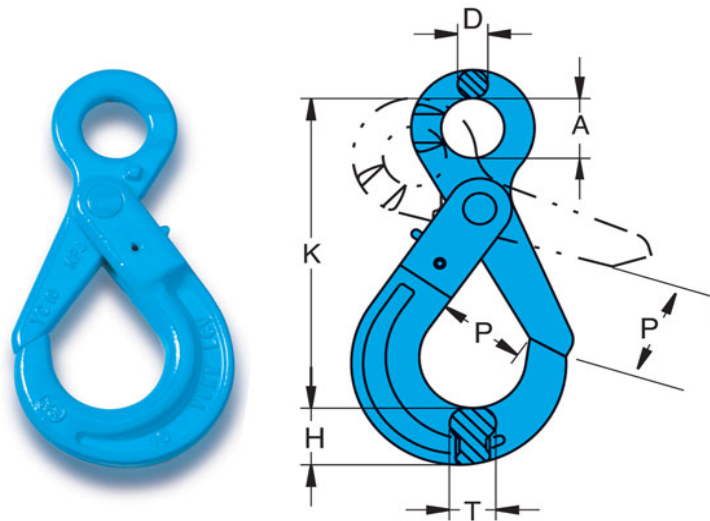

METRIC SPECIFICATIONS

Part Code	Chain Size mm	WLL tonnes	A mm	D mm	H mm	K mm	P mm	T mm	Box Quantity	Mass Kg
X-025-07	7,8	2.5	25	11	24	136	34	20	20	0.8
X-025-10	10	4.0	32	13	30	167	44	26	12	1.5
X-025-13	13	6.7	40	16	39	207	51	30	6	3.0
X-025-16	16	10.0	50	21	49	252	60	36	4	5.8
X-025-20	20	16.0	60	23	65	290	70	53	2	10.0
X-025-22	22	19.0	70	24	63	319	80	49	2	12.5
X-025-26	26	26.5	80	25	69	343	99	56	1	15.0

IMPERIAL SPECIFICATIONS

Part Code	Chain Size inch	WLL lbs	A inch	D inch	H inch	K inch	P inch	T inch	Box Quantity	Mass lbs
X-025-07	5/16	5500	0.98	0.43	0.94	5.35	1.34	0.78	20	0.8
X-025-10	3/8	8800	1.26	0.51	1.18	6.57	1.73	1.02	12	1.5
X-025-13	1/2	14700	1.57	0.63	1.53	8.15	2.00	1.18	6	3.0
X-025-16	5/8	22000	1.96	0.82	1.93	9.92	2.36	1.41	4	5.8
X-025-20	3/4	35200	2.36	0.90	2.56	11.41	2.75	2.08	2	10.0
X-025-22	7/8	41800	2.75	0.94	2.48	12.56	3.15	1.93	2	12.5
X-025-26	1	58400	3.15	0.98	2.72	13.50	3.89	2.20	1	15.0