


## Yoke Grade 10 Clevis Foundry Hook

The William Hackett Grade 10 forged lifting components are manufactured by YOKE from alloy steel in accordance with EN1677. All forged components are individually magnaflux crack detected after heat treatment, they are then individually proof load tested to 2.5 times working load limit in accordance with EN1677. Only components fully compliant with all aspects of EN1677 can be used in chain slings certified to EN818-4. The William Hackett Grade 10 lifting components are suitable for use in a temperature range of -40°C up to 200°C without reduction in working load limit. Testing according to ASTM A952/A - DIN PAS 1061

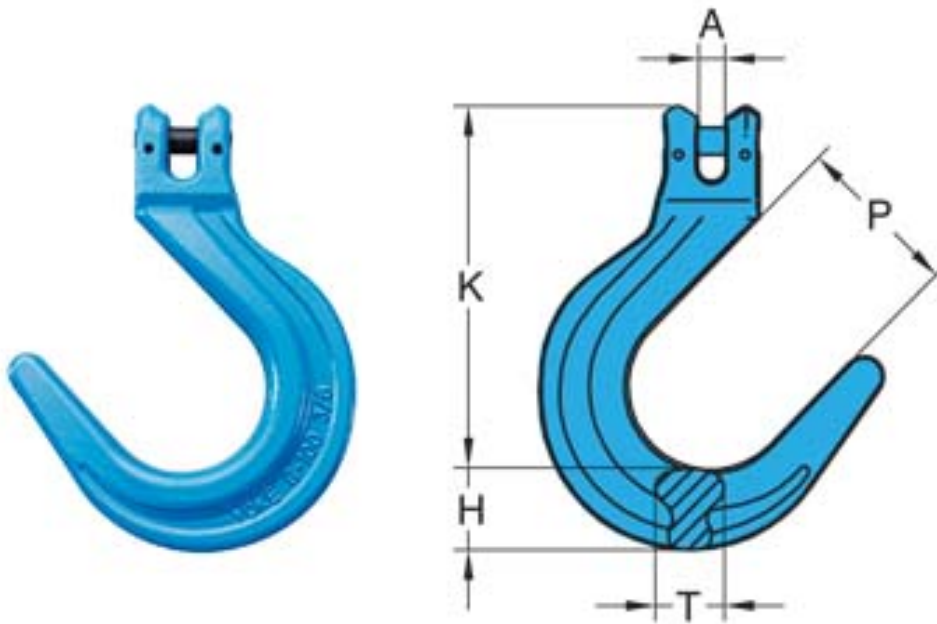

### METRIC SPECIFICATIONS

Part Code	Chain Size mm	A mm	H mm	K mm	P mm	T mm	WLL tonnes	Box Quantity	Mass Kg
X-046-07	7,8	9	27	133	62	19	2.5	25	0.95
X-046-10	10	11	32	163	74	23	4.0	12	1.8
X-046-13	13	14	39	200	88	32	6.7	8	3.6
X-046-16	16	18	47	239	98	41	10.0	5	6.4
X-046-20	20	21	62	305	113	46	16.0	2	11.2

### IMPERIAL SPECIFICATIONS

Part Code	Chain Size inch	A inch	H inch	K inch	P inch	T inch	WLL lbs	Box Quantity	Mass lbs
X-046-07	5/16	0.35	1.06	5.23	2.44	0.75	5500	25	2.09
X-046-10	3/8	0.43	1.26	6.41	2.91	0.90	8800	12	3.97
X-046-13	1/2	0.55	1.53	7.87	3.46	1.26	14700	8	7.93
X-046-16	5/8	0.70	1.85	9.40	3.85	1.61	22000	5	14.10
X-046-20	3/4	0.82	2.44	12.00	4.45	1.81	35200	2	24.70