

Load Moving Systems

LX Heavy load moving system

Capacity 6 t and 12 t

These three point loading systems comprise of a steerable front and a pair of adjustable rear skates.

The heavy load moving systems are supplied ready-to-use.

The steerable front skates (LX-6F and LX-12F) are provided with an appropriate towing bar. The rear skates (LX-12R) are identical in construction and are equipped with two adjustable tie rods.

The wheels are made of hardwearing nylon.


The front and rear skates can accept each 50% of the total capacity.



LX-6

Technical data LX

Model	Art.-No.	Capacity t	Number of wheels front skate	Number of wheels rear skate	Wheels diameter x width mm	Load area front skate mm	Load area rear skate mm	Adjustment range rear skates mm	Height mm	Weight kg
LX-6	N13600004	6.0	4	8	85 x 90	185 x 150	300 x 250	500 - 1400	115	45.0
LX-12	N13600005	12.0	8	8	85 x 90	400 x 220	300 x 250	500 - 1400	115	80.0

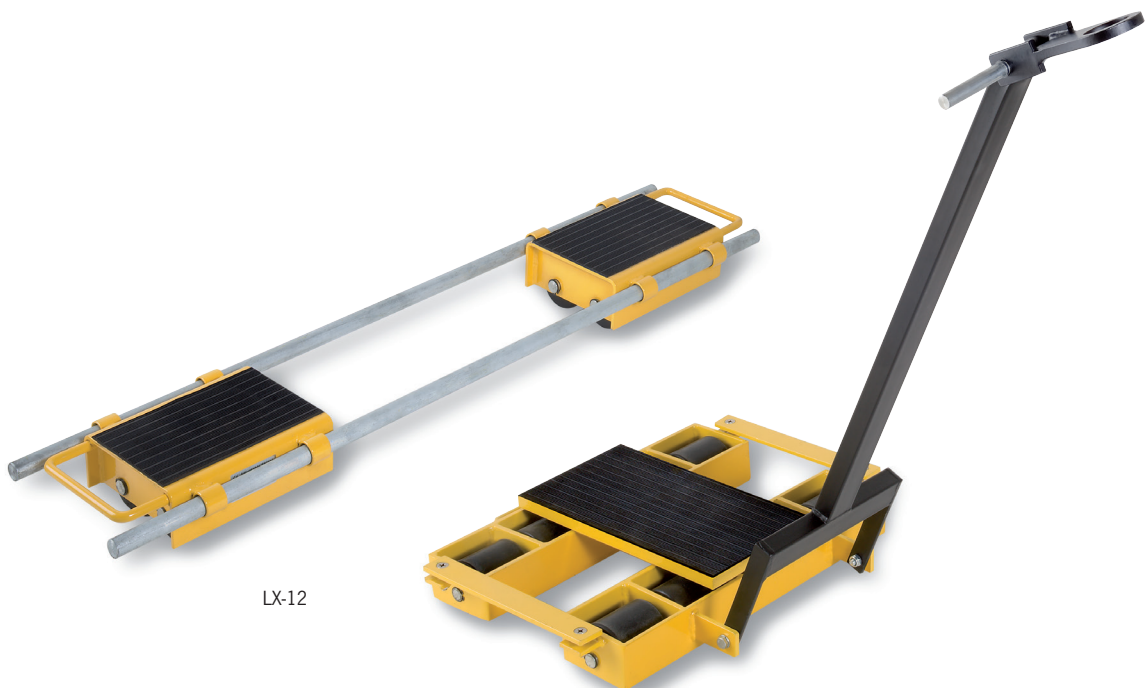

LX-12