

BuzziTotem

Product Specification Sheet

This document contains technical
information about the BuzziTotem



www.buzzi.space

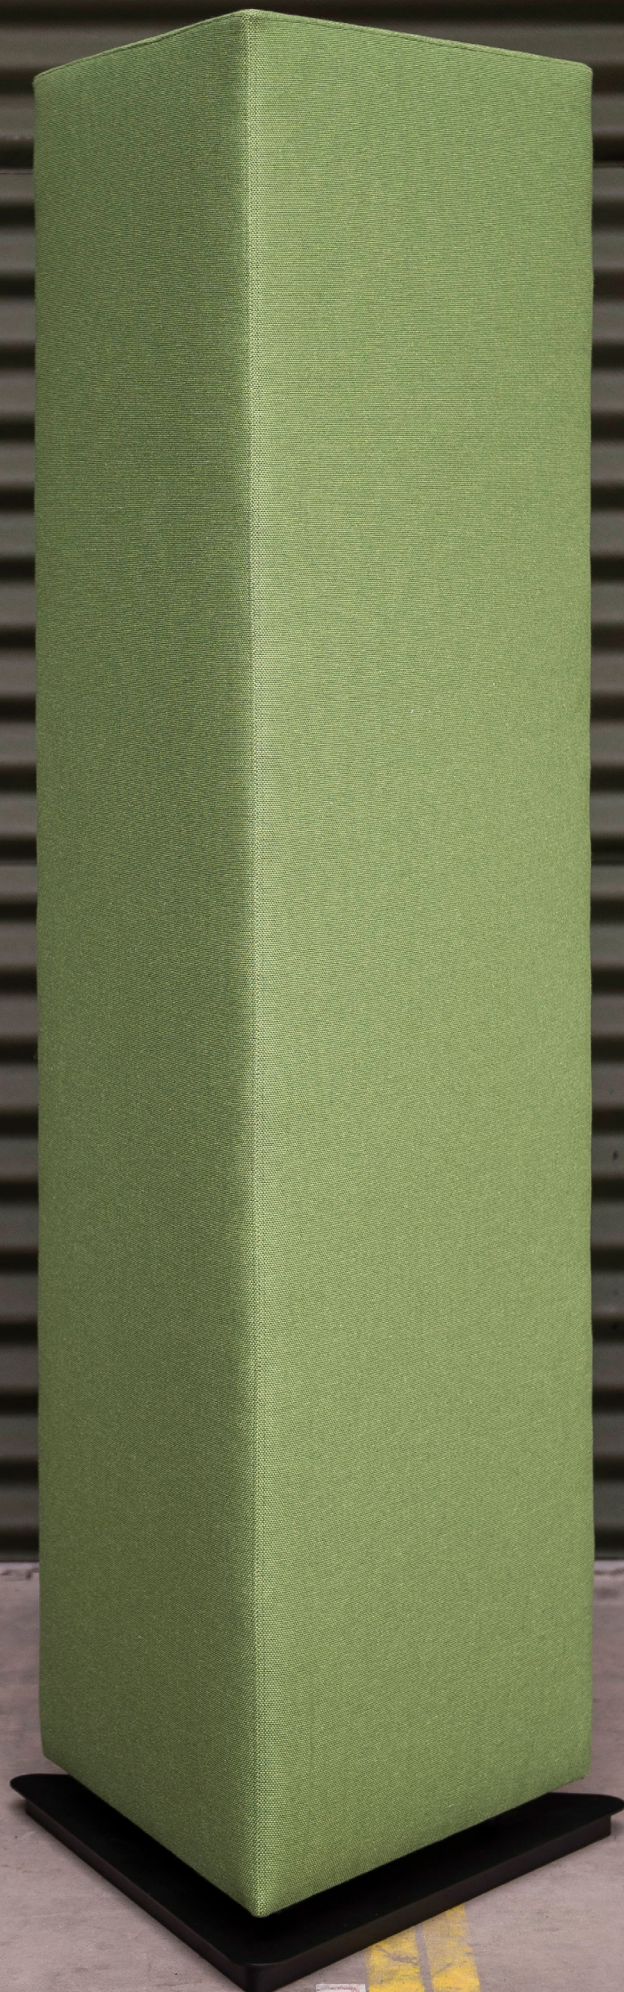

Sculptural, freestanding acoustic pillar

Say hello to this playful, freestanding acoustic pillar, available in three models. No matter the model, the soft edges help diffuse sounds while the upholstered acoustic foam body absorbs sound in its entirety. Needless to say, BuzziTotem is one of our peak acoustic performance solutions. Easily fit this standing, architectural element into corners to trap sound waves in offices, residential settings, or hospitality areas.

Design by BuzziSpace Studio

General

- 🔑 BuzziTotem Wedge | Beam | Cylinder
- 🌲 Filling: Acoustic foam + Plywood, MDF, Pinewood
- ⋯ Fabrics: Fabric, Trevira CS, Reflect, Revive 1, Clara 2, Remix 3, Velvet, Hero 2, Tonus 4, Arda, Memory 2

Acoustics



Absorption



Diffusion



Low tone



Mid tone




High tone

Content

Configurations	3
Components	6
Fabrics	7
Dimensions	11
Acoustics	17

Configurations

BuzziTotem Wedge

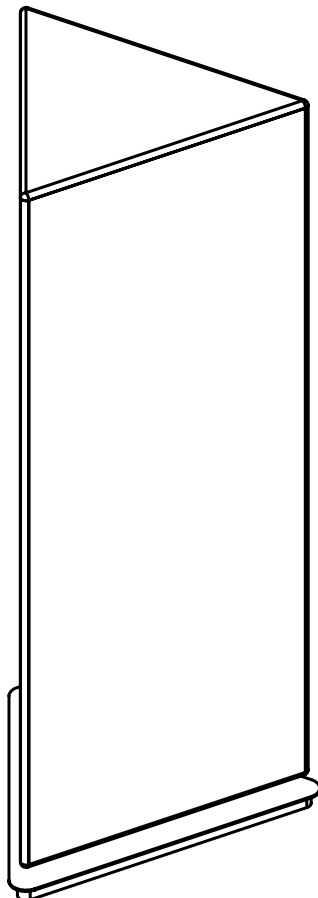

Small | Medium | Large



Filling: Acoustic foam with Plywood, MDF, Pinewood

Baseplate: powder coated metal or Wood with plastic feet

Baseplate

Small: Height 120 cm Width 62 cm
Height 47.24" Width 24.41"

Medium: Height 155 cm Width 62 cm
Height 61.02" Width 24.41"

Large: Height 190 cm Width 62 cm
Height 74.80" Width 24.41"



Wood

Small: Height 116 cm Width 55 cm
Height 45.67" Width 21.65"

Medium: Height 151 cm W 55 cm
Height 59.45" Width 21.65"

Large: Height 186 cm Width 55 cm
Height 73.23" Width 21.65"

Baseplate

Small: 10,5 kg | 23.15 lbs

Medium: 13 kg | 28.66 lbs

Large: 15,5 kg | 34.17 lbs



Wood

Small: 8,5 kg | 18.74 lbs

Medium: 11 kg | 24.25 lbs

Large: 13,5 kg | 29.76 lbs


Fabric, Trevira CS, Reflect, Revive 1, Clara 2, Remix 3, Velvet, Hero 2, Tonus 4, Arda, Memory 2



Color baseplate: Black (RAL 9005)

Optional wheels for metal baseplate only (3 pcs)

BuzziTotem Beam

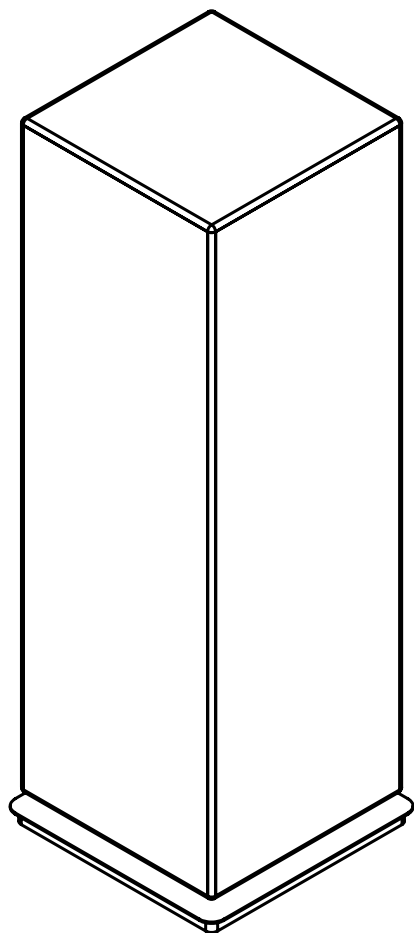

Small | Medium | Large



Filling: Acoustic foam with Plywood, MDF, Pinewood

Baseplate: powder coated metal or Wood with plastic feet

Baseplate

Small:	Height 120 cm	Width 52 cm	Depth 52 cm
	Height 47.24"	Width 20.47"	Depth 20.47"
Medium:	Height 155 cm	Width 52 cm	Depth 52 cm
	Height 61.02"	Width 20.47"	Depth 20.47"
Large:	Height 190 cm	Width 52 cm	Depth 52 cm
	Height 74.80"	Width 20.47"	Depth 20.47"



Wood

Small:	Height 116 cm	Width 46 cm	Depth 46 cm
	Height 45.67"	Width 18.11"	Depth 18.11"
Medium:	Height 151 cm	Width 46 cm	Depth 46 cm
	Height 59.45"	Width 18.11"	Depth 18.11"
Large:	Height 186 cm	Width 46 cm	Depth 46 cm
	Height 73.23"	Width 18.11"	Depth 18.11"

Baseplate

Small:	15 kg 33.06 lbs
Medium:	18,5 kg 40.78 lbs
Large:	22 kg 48.50 lbs



Wood

Small:	12 kg 26.46"
Medium:	15,5 kg 34.17"
Large:	19 kg 41.89"


Fabric, Trevira CS, Reflect, Revive 1, Clara 2, Remix 3, Velvet, Hero 2, Tonus 4, Arda, Memory 2



Color baseplate: Black (RAL 9005)

Optional wheels for metal baseplate only (4 pcs)

BuzziTotem Cylinder

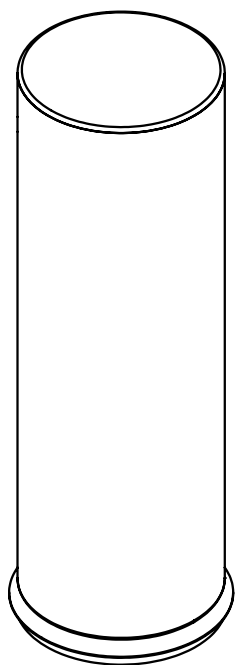

🔑 Small | Medium | Large

🌲 Filling: Acoustic foam with Plywood, MDF, Pinewood
Baseplate: powder coated metal or Wood with plastic feet

Baseplate

Small: Height 120 cm Ø 52 cm
Height 47.24" Ø 20.47"
Medium: Height 155 cm Ø 52 cm
Height 61.02" Ø 20.47"
Large: Height 190 cm Ø 52 cm
Height 74.80" Ø 20.47"



Wood

Small: Height 116 cm Ø 46 cm
Height 45.67" Ø 18.11"
Medium: Height 151 cm Ø 46 cm
Height 59.45" Ø 18.11"
Large: Height 186 cm Ø 46 cm
Height 73.23" Ø 18.11"

Baseplate

Small: 12 kg | 26.46 lbs
Medium: 15 kg | 33.06 lbs
Large: 18 kg | 39.68 lbs



Wood


Small: 8 kg | 17.64 lbs
Medium: 11 kg | 24.25 lbs
Large: 14 kg | 30.86 lbs

Fabrics: Fabric, Trevira CS, Reflect, Revive 1, Clara 2, Remix 3,
Velvet, Hero 2, Tonus 4, Arda, Memory 2
... Color baseplate: Black (RAL 9005)
Optional wheels for metal baseplate only (5 pcs)

Components

Bottom

Baseplate

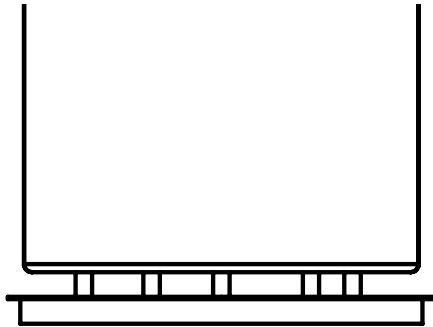


Baseplate powder coated metal
Color baseplate: Black (RAL 9005))

Wood



Bottom:
Poplar multiplex
Wedge: 3 plastic feet
Beam: 4 plastic feet
Cylinder: 5 plastic feet


Wheels (optional)

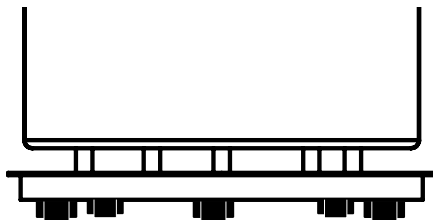

Wheels only in combination with baseplate
Wedge: 3 wheels
Beam: 4 wheels
Cylinder: 5 wheels

Fabrics

Fabric (45 colors)



Category A

Composition 70% Recycled Wool, 25% Recycled Polyacryl,
5% Recycled Other Fabrics

Weight 405 g/m² | 11.94 oz/yd²

Abrasion resistance 40.000 Martindale, 50,000 Wyzenbeek

Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette).
EN 1021.2/2006 | BS EN 1021.2/2006 (match)
USA: CAL TB 117 | ASTM E84 CLASS A


Fastness to light EU: 4 | USA 4

Fastness to rubbing EU: Wet 3-4 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Trevira CS (47 colors)



Category A

Weight 420 g/m² | 12.39 oz/yd²

Composition 100% Polyester, Trevira CS

Abrasion resistance 100.000 Martindale, 90,000 Wyzenbeek

Flammability BS 5852 part II: CRIB 5 | BS 7176 Medium Hazard
USA: CAL TB 117 | M1 | B1 | EN 1021/1-2 | C1 |
IMO Res. A652 (16)


Fastness to light EU: 6 | USA 5

Fastness to rubbing EU: Wet 4-5 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Reflect (34 colors)



Category A

Weight 430 g/m² | 13.78 oz/yd²

Composition 100% Post-consumer recycled polyester

Abrasion resistance 100.000 Martindale

Flammability AS/NZS 3837 class 1 | ASTM E84 Class A Unadhered
ASTM E84 Class B Adhered | BS 5852 crib 5 with treatment

BS 5852 part 1 with treatment | EN 1021-1/2 | US Cal. Bull. 117-2013

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing EU: Wet 5-5 | Dry 5-5


Pilling Note 4, EN ISO 12945



kvadrat

Revive 1 (25 colors)

kvadrat



Category A

Composition 100% recycled polyester FR

Weight 430 g/lin.m

Abrasion resistance 60.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1
UNI 9175 1IM | US Cal. Tech. Bull. 117
IMO A.652 (16)


Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 5, wet 4-5

Pilling Note 4-5, EN ISO 12945



Velvet (12 colors)



Category B

Composition 100% PES

Weight 375 g/m² | 11.06 oz/yd²

Abrasion resistance > 100.000 Martindale


Fastness to light EU: 4-5

Fastness to rubbing EU: Wet 4 | Dry 4-5

Pilling EU: 4-5

Clara 2 (24 colors)

kvadrat



Category B

Composition 92% new wool, 8% nylon

Weight 400 g/lin.m

Abrasion resistance 80.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852, ignition source 2-3 | DIN 4102 B2
NF D 60 013 | UNI 9175 1IM | US Cal. Tech. Bull. 117, Sec. E
NFPA 260 | IMO A.652(16)

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 4, EN ISO 12945



Remix 3 (73 colors)

kvadrat



Category B

Composition 90% new wool, 10% nylon

Weight 415 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1
Önorm B1/Q1 | NF D 60 013 | UNI 9175, 1IM
AS/NZS 1530.3 | Cal. Tech. Bull. 117-2013
NFPA 260 | IMO FTP Code 2010:Part 8

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 4, EN ISO 12945



Hero 2 (33 colors)

kvadrat



Category C

Composition 97% new wool, 3% nylon

Weight 580 g/lin.m

Abrasion resistance 45.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B2 | NF D 60 013
UNI 9175 1IM | US Cal. Bull. 117-2013 | NFPA 260
IMO A.652 (16)

Fastness to light Note 5-6, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4-5

Pilling Note 3-4, EN ISO 12945



Tonus 4 (47 colors)

kvadrat



Category D

Composition 90% new wool, 10% Helanca

Weight 665 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1 | DIN 4102 B2
Önorm B1/Q1 | NF D 60 013 | UNI 9175 1IM
US Cal. Bull. 117-2013 | NFPA 260 | IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 3-5, wet 3-5

Pilling Note 3, EN ISO 12945



Arda (12 colors)

kvadrat



Category E

Composition 70% new wool 21% polyester 9% nylon

Weight 800 g/lin. m | 25.8 oz/ly

Abrasion resistance

Approx. 50.000 Martindale rubs, EN ISO 12947

Flammability ASTM E84 Class A Unadhered | AS/NZS 3837 class 2 | BS 5852 part 1
BS 5852 crib 5 | DIN 4102 B2 | EN 1021-1/2 | IMO FTP Code 2010 Part 8
UNI 9175 1IM | US Cal. Bull. 117-2013

Fastness to light Note 5-8, ISO 105-B02

Fastness to rubbing Dry note 3-5 ISO 105-X12


Wet note 3-5 ISO 105-X12

Pilling Note 4, EN ISO 12945



Memory 2 (20 colors)

kvadrat



Category E

Composition 100% Trevira CS

Weight 700 g/lin.m

Abrasion resistance

35.000 rubs acc. to the Martindale method, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1

NF D 60 013 | NF P 92 507 M1 | UNI 9175 11M

UNI 9177 classe 1 | US Cal. Tech. Bull. 117

IMO A.652 (16)

Fastness to light Note 5-8, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4-5


Pilling Note 4, EN ISO 12945



Dimensions

BuzziTotem Wedge Baseplate


Side

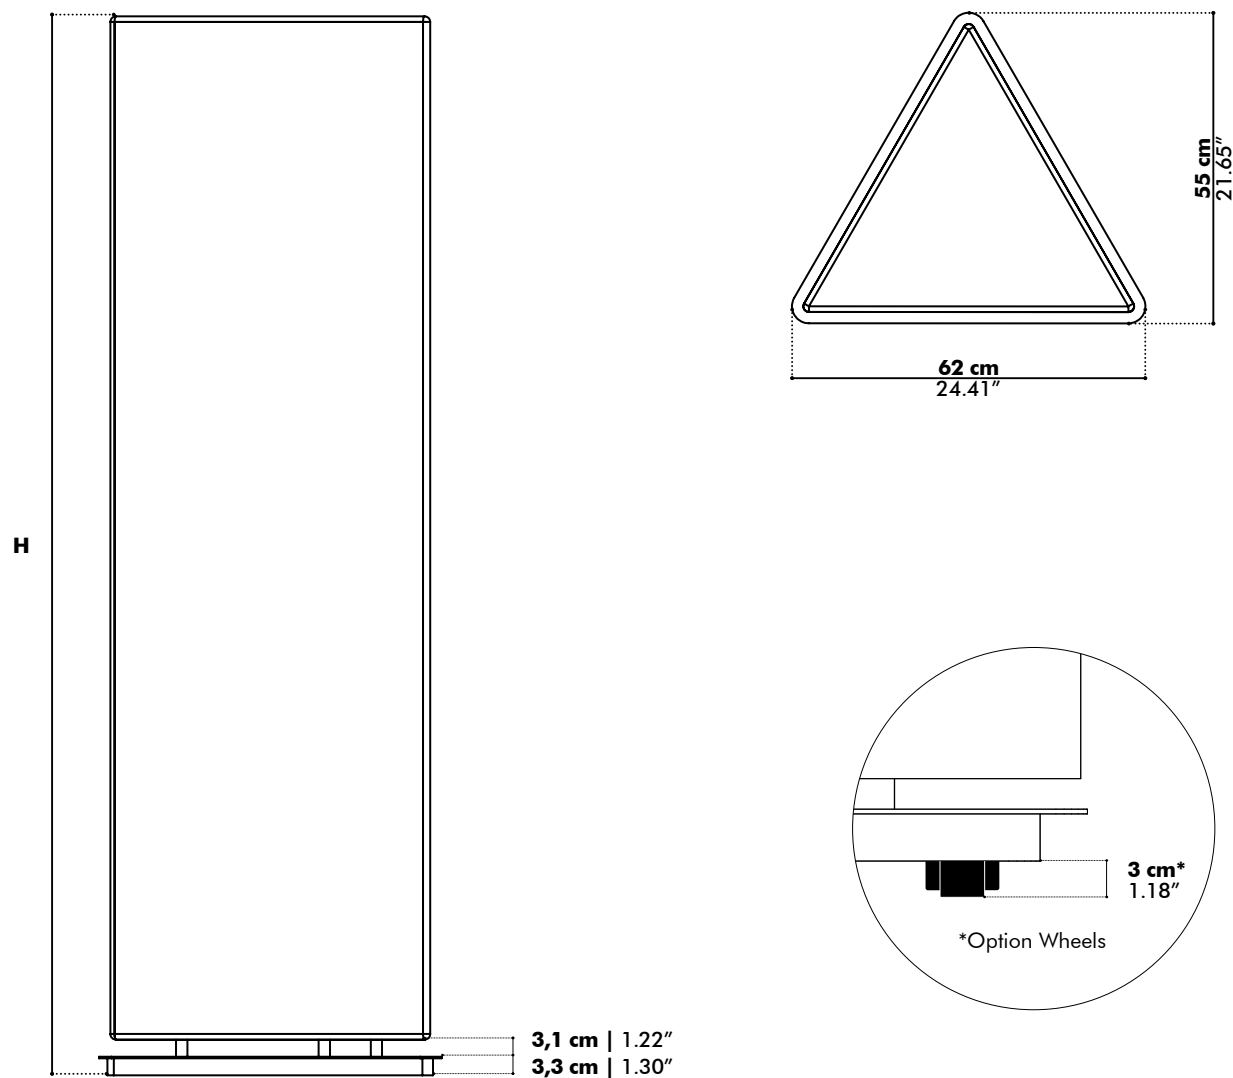

	Wedge Small	Wedge Medium	Wedge Large
H	120 cm	155 cm	190 cm
	47.24"	61.02"	74.80"

BuzziTotem Wedge Wood


Side

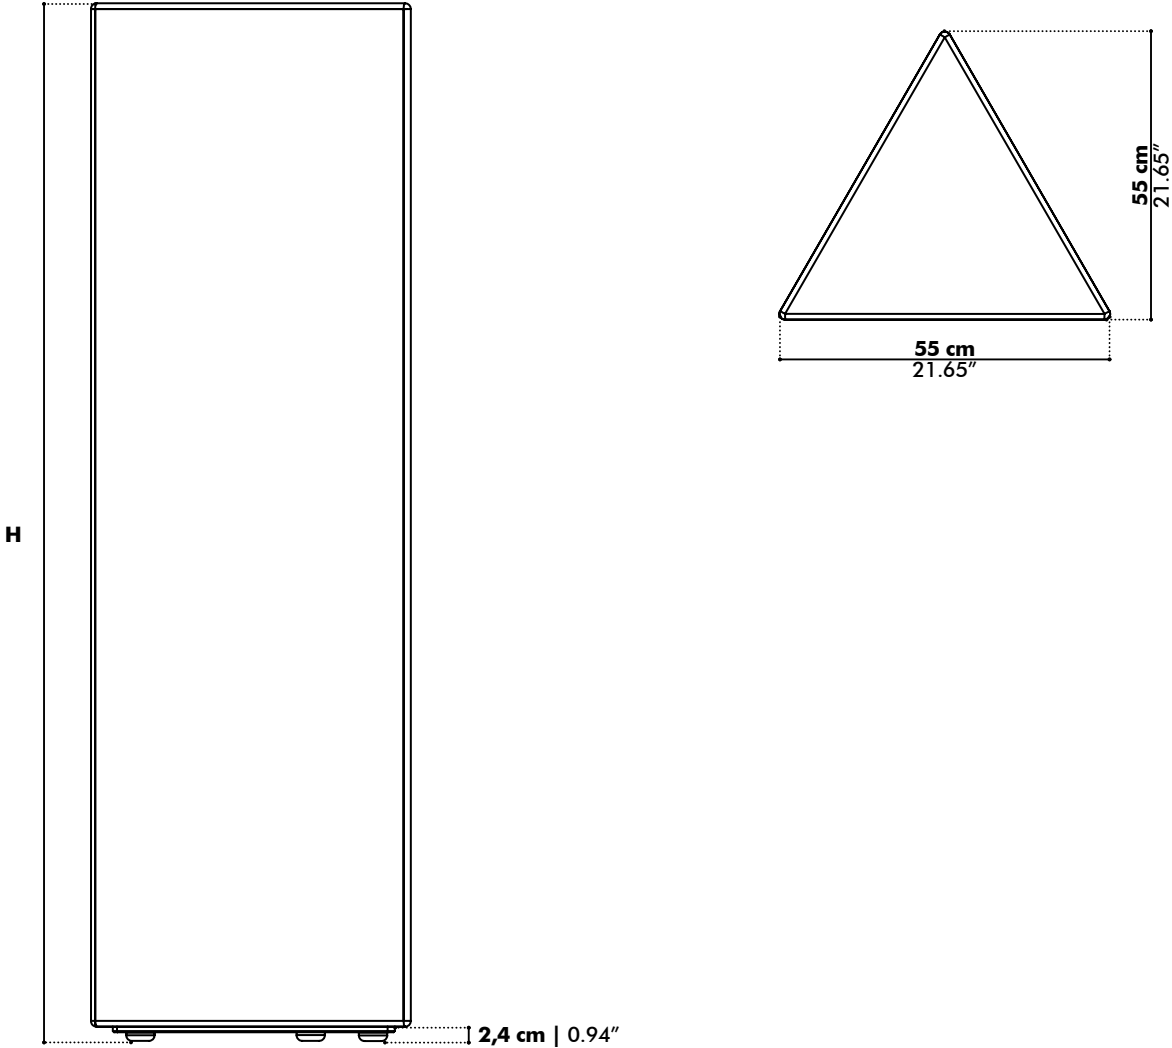

	Wedge Small	Wedge Medium	Wedge Large
H	116 cm	151 cm	186 cm
	45.67"	59.45"	73.23"

BuzziTotem Beam Baseplate


Side

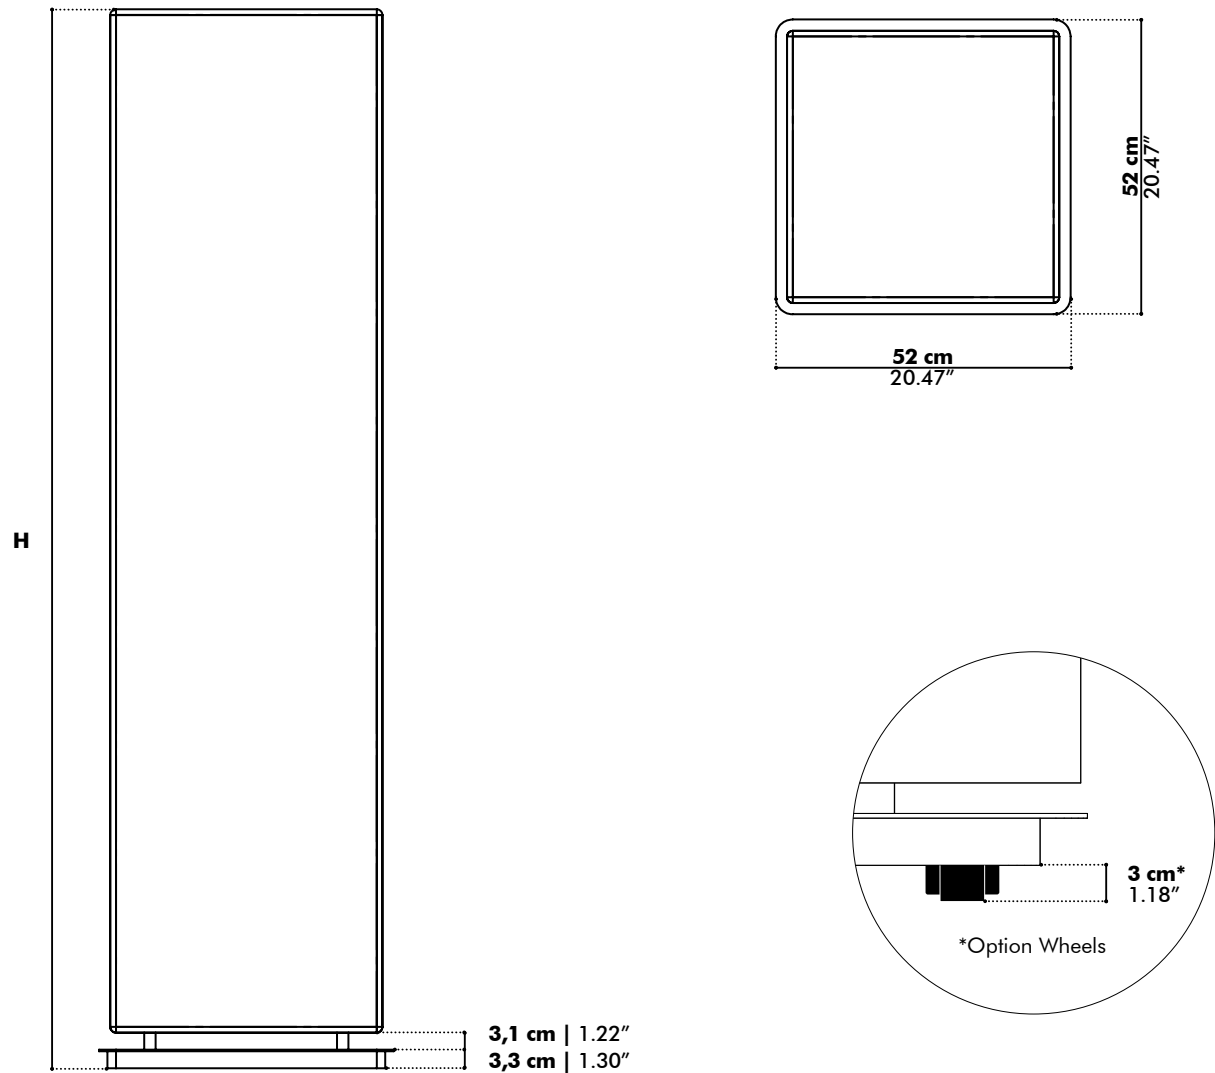

	Beam Small	Beam Medium	Wedge Large
H	120 cm	155 cm	190 cm
	47.24"	61.02"	74.80"

BuzziTotem Beam Wood


Side

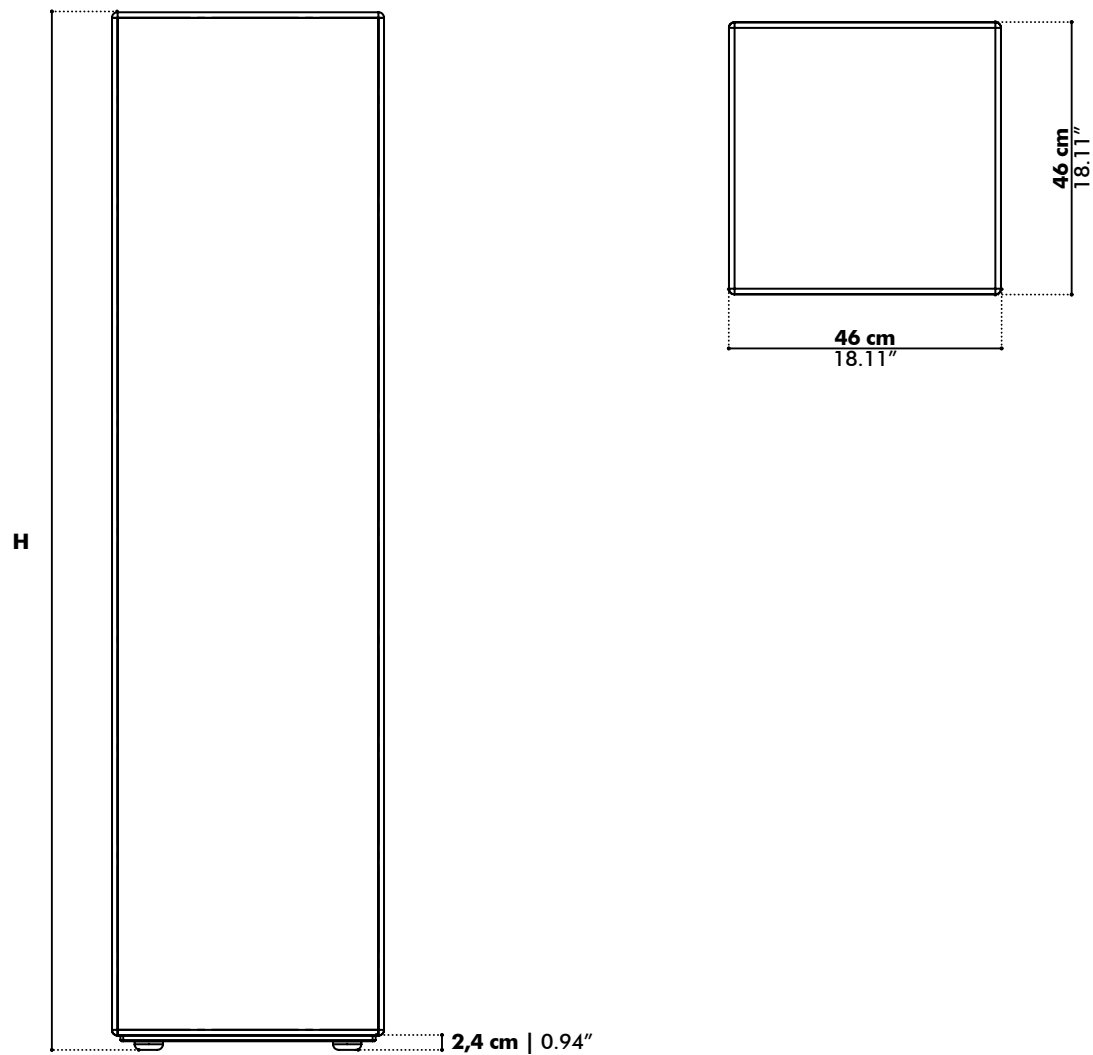

	Beam Small	Beam Medium	Beam Large
H	116 cm	151 cm	186 cm
	45.67"	59.45"	73.23"

BuzziTotem Cylinder Baseplate


Side

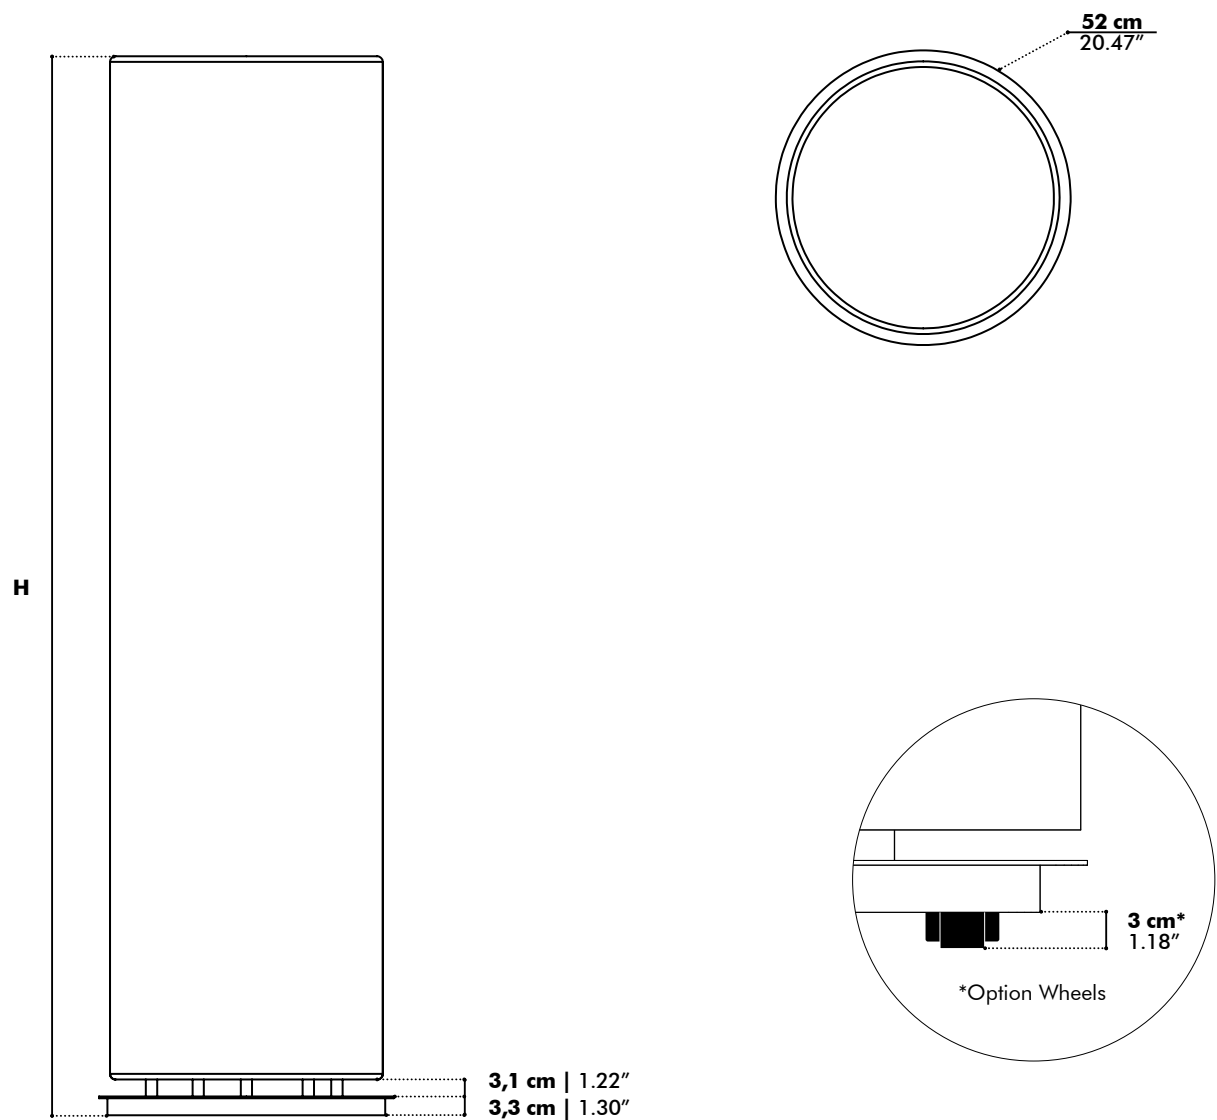

	Cylinder Small	Cylinder Medium	Cylinder Large
H	120 cm 47.24"	155 cm 61.02"	190 cm 74.80"

BuzziTotem Cylinder Wood

Side

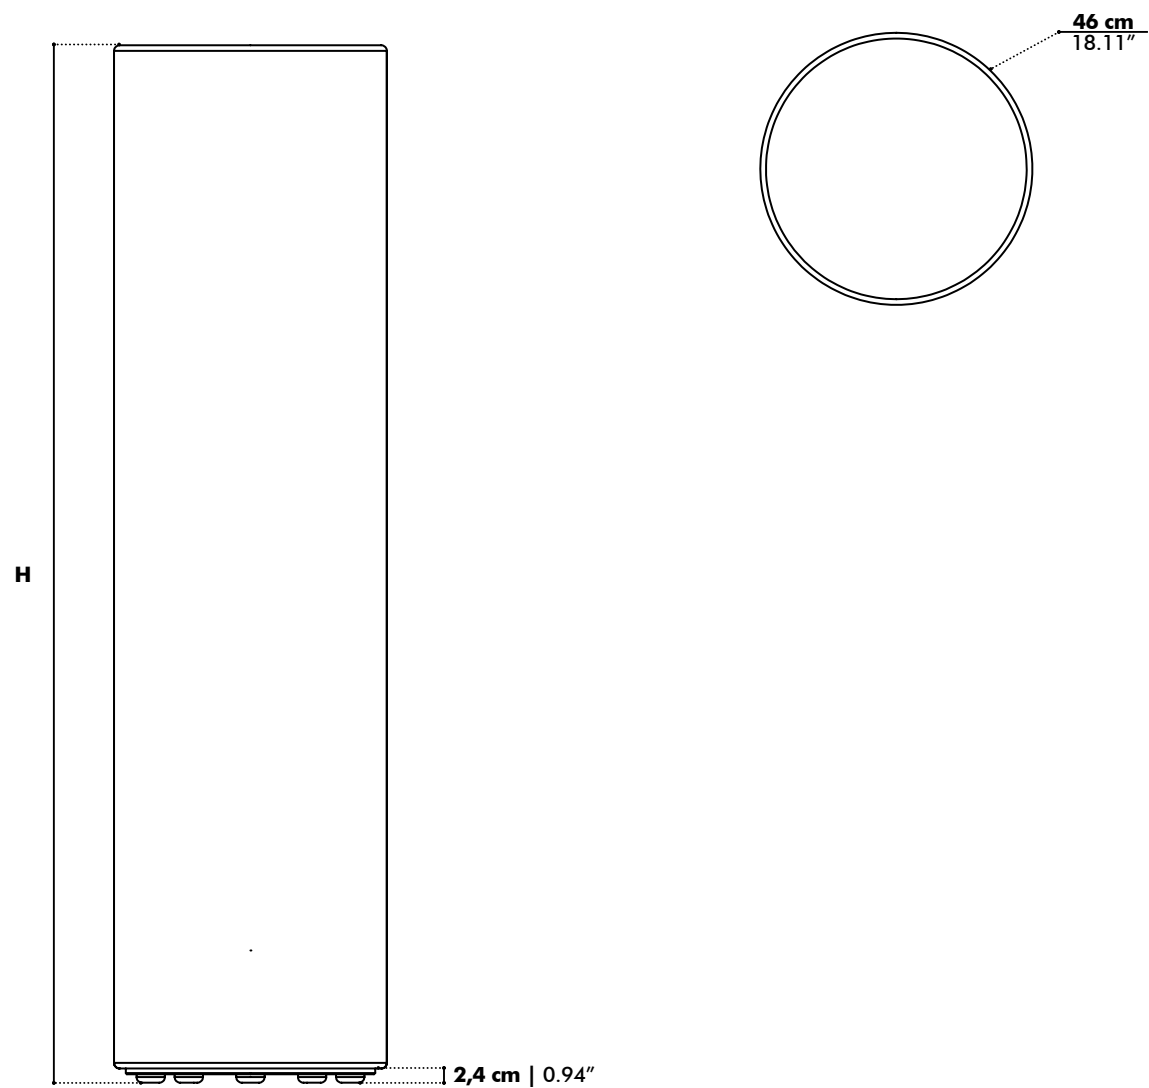


Flat	Cylinder Small	Cylinder Medium	Cylinder Large
H	116 cm 45.67"	151 cm 59.45"	186 cm 73.23"

Acoustics

BuzziTotem Wedge


Equivalent sound absorption area in m² per object

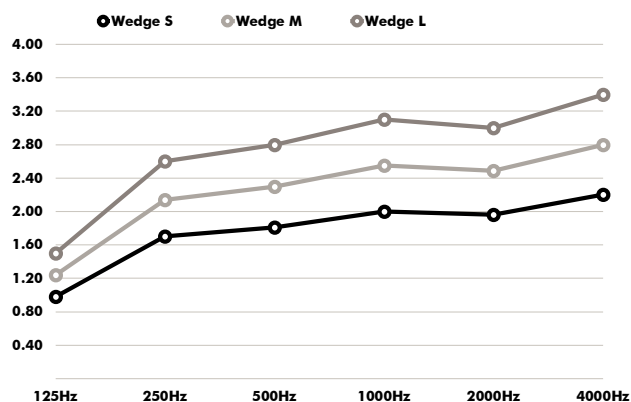

Hz	Wedge S Aeq/m²	Wedge M Aeq/m²	Wedge L Aeq/m²
125	0.98	1.24	1.50
250	1.70	2.14	2.60
500	1.81	2.30	2.80
1000	2.00	2.55	3.10
2000	1.96	2.49	3.00
4000	2.20	2.80	3.40

BuzziTotem Beam


Equivalent sound absorption area in m² per object

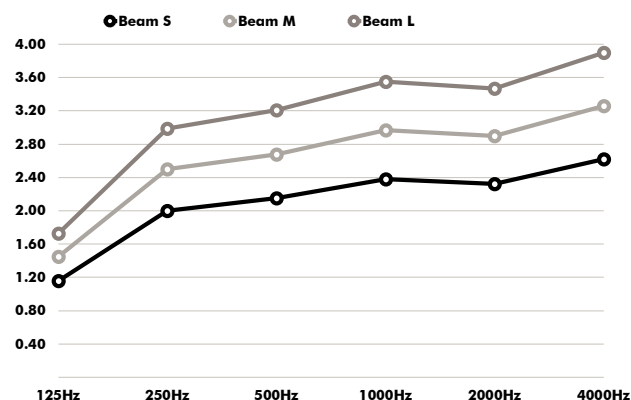

Hz	Beam S Aeq/m²	Beam M Aeq/m²	Beam L Aeq/m²
125	1.16	1.45	1.73
250	2.00	2.50	2.99
500	2.15	2.68	3.21
1000	2.38	2.97	3.55
2000	2.32	2.90	3.47
4000	2.62	3.26	3.90

BuzziTotem Cylinder

Equivalent sound absorption area in m² per object

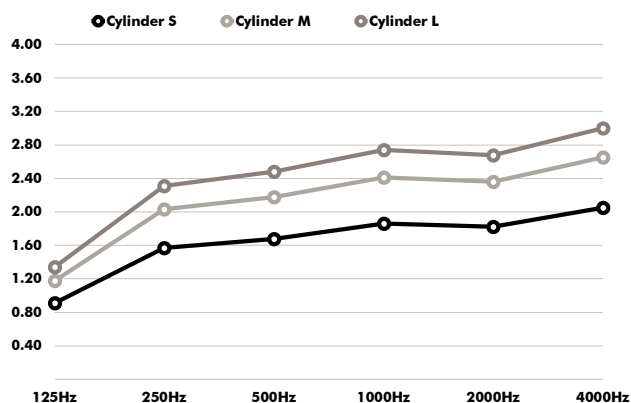

Hz	Cylinder S Aeq/m²	Cylinder M Aeq/m²	Cylinder L Aeq/m²
125	0.91	1.18	1.34
250	1.57	2.03	2.31
500	1.68	2.18	2.48
1000	1.86	2.41	2.74
2000	1.82	2.36	2.68
4000	2.05	2.65	3.00