ROSA BUS

SCHOOL MODEL · AUTO





Power / Torque: 129kW / 430Nm





- Best-selling bus in its class
- Advanced safety systems

- Euro 6
- Passenger car licence model



SPECIFICATIONS - ROSA SCHOOL BUS

MODEL

LENGTH (m)

CONFIGURATION

School Bus 25 Seat Duonic Auto

BE741JRMBFAD

7.7

Low Back Vinyl Bench Seats

Engine Version	FUSO 4P10-T6 Diesel
Configuration	4 Cyl. In-line DOHC, 4-Valve
Туре	Variable Geometry Turbo Charged Air to Air Intercooled
Displacement	3.0 litre (2,998cc)
Power (DIN)	129kW @ 2,865 rpm
Torque (DIN)	430Nm @ 1,600~2,860 rpm
Maximum Engine Speed (rpm)	4,100
Compression Ratio	17.5:1
Cooling System / Oil Cooler	Water cooled with vicous fan, 14.0L capacity Plate type engine oil cooler
Air Cleaner	Dry Paper Element with restrictor indicator. Forward Mounted Intake System
Emission Control	Diesel Particulate Filter (DPF) Exhaust Dash Display DPF Status 0~9 (Empty~Full) Parked Regeneration possible from 7~9 Selective Catalytic Reduction (SCR) after-treatment system (BlueTec)
Emission Level	Euro 6 (ADR 80/03)

FUEL	
Injection System	Bosch Common Rail Direct Injection
Tank Type	Rectangular Steel Tank with Locking Cap
Fuel Capacity (L)	100
Filtration	Filter with Water Separator
AdBlue Exhaust Fluid Capacity (L)	12
Speed Limiter	100km/hr

ELECTRICAL	
Voltage	12V / 24V with Battery Equalizer
Alternator Capacity	24V-90 amp
Battery Capacity	2x12V, 70Ah/5hr with Battery Equalizer
Headlamps	LED

Version	FUSO DUONIC MO38S6
version	1 030 DOONIC MO3030
Type / Speeds	6 Speed Automated Manual with dual clutch (Wet multi plate)
Features	Virtually Instant Gear Changes In-Dash Gear Lever with Park Brake Positior and Manual Mode
Ratios	1st: 5.397
	2nd: 3.788
	3rd: 2.310
	4th: 1.474
	5th: 1.000
	6th: 0.701
	Rev. 5.397
Park Interlock	Ignition Key (On) and Foot Brake Activated

FRONT SUSPENSION	
Туре	Independent Double Wishbone with Coil springs, Stabiliser Bar and Shock Absorbers

REAR AXLE	
Туре	Full Floating Hypoid
Capacity (kg)	3,800
Ratio	5.285:1
REAR SUSPENSION	
	T 1 (''' 0' 1'''
Spring suspension	Long Taper Leaf with Stabiliser Bar

and Shock Absorbers

STEERING	
Туре	Power steering with tilt / telescopic adjustable steering wheel
BRAKES	
Туре	Hydraulic dual circuit with Front & Rear Twin Caliper Ventilated Disc brakes
Features	ABS plus EBD (Electronic Brake Distribution) Active Emergency Braking System (AEBS) Electronic Stability Program (ESP) Brake Priority System
Park Brake	On rear of transmission

Single front, Dual rear	Silver steel wheels
Tyres	205/85R16
Spare Tyre	Provided

Parallel Tapered Channel with Cross Members

Exhaust brake

Auxiliary

Туре

INSTRUMENTS	
Gauges	Speedometer with LCD Odometer and Dual Tripmeter; Tachometer (Yellow Zone indicates safe exhaust operating zone); Fuel Level; Water Temperature
Warning Lamps	EBS; LDWS; ESP; ESP Off; Turn Signal; Headlamps; High Beam; Hill Holder; Auxiliary Brake; Parking Brake; Oil Pressure; Battery Charging; Vacuum Pressure; DPF Regeneration; DPF Fill Level; Adblue Fill Level Passenger door open; Rear Emergency Door Open

Windscreen	Laminated Tinted with Darker Upper Band
Side Windows	Bonded with heat absorbing dark grey glass
Body Colour	Rising White (W48) with Colour Code Bumpers Other colours available to special order, Black Side Window Sash
Towing Hook	Front

INTERIOR	
Lighting	Access Step Light & LED Interior Lights
Floor	Heavy Duty Vinyl Floor Covering
Interior	Semi-trimmed
Modesty Panel	LH front passenger seat

SPECIFICATIONS - ROSA SCHOOL BUS

MULTI MEDIA PACKAGE

7" Multi Media Touch screen Display: AM/FM/DAB + USB + AUX, Apple Carplay / Android Auto, Wi-Fi enabled for Internet Radio, Bluetooth, 32GB Storage Capacity; Auxiliary input for PA system, HD Reverse Camera included[†]. 4 speakers.

DRIVER COMFORT AND FEATURES	
Driver's Seat	Low Back cloth covered with head rest and slide adjustment; Adjustable Height & Back Angle
Visibility Mirrors	LH & RH External Rear View Additional Front Left Clearance Rear Mounted Reversing on rear door Internal Rear Vision
General	Driver's Power Window; Cup Holders; Sun Visors for Driver. Front Passenger on School; Central Locking; Accessory Power Outlet 12v

AIR CONDITIONING (SEPARATE UNIT)					
Control	Manual a/con				
Capacity	12.4 kw (JIS)				
Distribution	Integrated Roof Ducts				
Heaters	Forward Cabin plus Passenger Units throughout Cab				
Additional ventilation	Fresh Air Duct on Roof at Rear of Cab				

PASSENGER ACCESS AND SEATING		
Seating capacity	24 passenger and driver	
Passenger Door	Bi-fold vacuum automatic with warning buzzer and dash interlock	
Passenger Seats	Fixed Low Back, LH single, RH Bench, Blue Vinyl trim	
Grip Handles	On Rear Seat (Except above Wheel Arch)	

PERFORMANCE	
Turning Circle (kerb to kerb - metres)	14.2
Road Speed (km/h) at Max Engine Speed	100km/hr Speed Limiter

DIMENSIONS	
Wheelbase	4,550
Overall Length	7,730
Overall Width	2,070
Overall Height	2,755
Front / Rear Track	1,655 / 1,495
Body Inside	Length: 7,030 Width: 1,845 Height: 1,860

SAFETY FEATURES

ACTIVE SAFETY FEATURES	SYSTEMS
Active Emergency Braking System	Yes
Lane Departure Warning System	Yes
Electronic Stability Control	Yes
Anti-Lock Braking System	Yes
Anti-Slip Regulator	Yes
Hill Start Assist	Yes
Headlamps	LED Height-Adjust
LED Fog Lamps	LED
Reverse Warning	Buzzer
Passenger Access Door	Accelerator Interlock and Pre-Warning Buzzer when door open

PASSIVE SAFETY FEATURES						
Airbags	Driver and Front Passenger					
Seat Belts	Driver and front passenger 3 Point ELR, Passenger seats 2 point ELR					
Emergency Exits	4 Exits: 1 LH and 2 RH Windows with Emergency Hammers and Rear Emergency Door					
Front passenger door	Emergency External Opening					
Rear Door	Internal & External Access					
Rear Door Locking	Automatic when Ignition Key is Off					

OPTIONS

Additional Multimedia Display cameras (up to 4); In built GPS navigation; Reversing Sensors; Tyre Pressure Monitoring System

SERVICE INTERVALS

30,000km full service / 15,000km safety inspection
30,000km full service intervals, depending on application/use.
15,000km safety inspection, with greasing, required to maintain warranty cover and ensure optimum performance.

WARRANTY


 $5~years\ /\ 200,\!000km$ Simply have your vehicle serviced at an authorised FUSO Service Centre, at the recommended servicing intervals, and you are covered by an additional $2~year\ /\ 100,\!000km$ FUSO warranty on top of the first $3~years\ /\ 100,\!000km$. That's a total of $5~years\ /\ 200,\!000km$ cover. Refer to terms and conditions in the FUSO warranty booklet for full details

KERB WEIGHTS AND MAX AXLE LOADS	(kg)						
Model			Vehicle Ratings**			Axle ings**	Kerb Weights*
		GVM	Towing Capacity (kg) Unbraked Braked		Front	Rear	
School Bus 25 Seat Duonic Auto	BE741JRMBFAD	6,370	715	1615	2,570	3,800	3,900
School Bus Duonic Auto (restricted seating capacity with 5995kg GVM)	BE741JRMBFAD(D)	5,995	715	1615	2,570	3,800	3,900

 $^{^{\}star}$ Weights (est.) includes 10L fuel and spare wheel and are subject to 2.5% variation (+/-)

 $^{^{\}star\star}$ Vehicle ratings and max axle loadings may be limited by local regulations.

SPECIFICATIONS - ROSA SCHOOL BUS

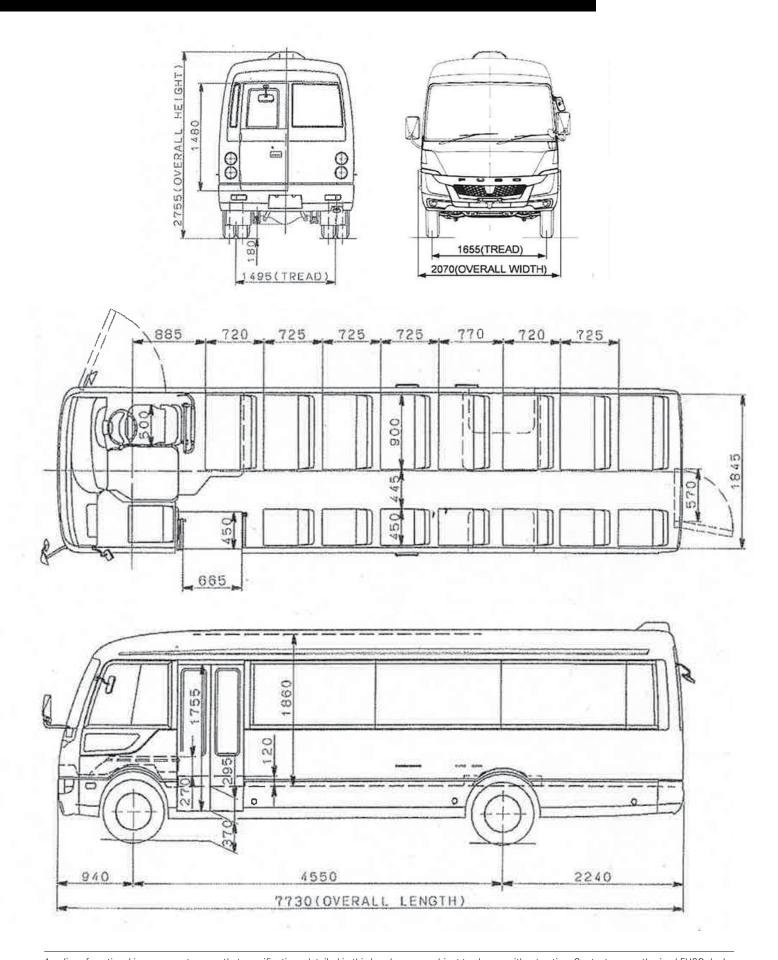

A policy of continual improvement means that specifications detailed in this brochure are subject to change without notice. Contact your authorised FUSO dealer to confirm current specifications. FUSO is a registered trademark of Mitsubishi Fuso Truck & Bus Corporation. Copyright © Fuso NZ (2021)

