

Lune Bath

Installation Care & Maintenance Warranty

Pre-Installation Checks

Please take time to read and perform these checks before proceeding to the installation instructions.

This product must be installed by a qualified trade's person in a professional manner.

Caution: When lifting or installing heavy items always seek assistance, never attempt to lift or maneuverer alone. Some products may require a mechanical lift. Always follow safe practices and use personal protective equipment (PPE).

1. Inspect all items upon delivery.

If you believe there is a fault, damage or the item is incorrect, contact the place of purchase immediately and do not proceed with installation. Proceeding with installation will immediately void warranty. The manufacture will not be liable for installation or removal costs.

Omvivo allow 7 days from receipt of goods for notification of any discrepancies in goods received.

2. Ensure you have the appropriate equipment

The installer is to determine appropriate fixings/plumbing components for installation, location, substrate and other environmental factors.

3. Read the specification documents of your bath and check for special plumbing or mounting requirements

Bath installation requirements vary between brand, manufacturer and style.

4. Test fit your bath into space

Check that the bath fits into the specified location and the plumbing has been roughed in at the correct location.

5. Make sure you have appropriate support

Your floor should have appropriate support / reinforcement handle the weight of the bath when full. Too calculate the weight when full add the dry weight of the bath (kg) to its capacity(lt).

FAILURE TO ADHERE TO THE ABOVE PREPARATION OR INSTALLATION INSTRUCTIONS WILL VOID YOUR WARRANTY



Lune Bath Warranty

Lune bath is covered by a:

5 YEAR WARRANTY - DOMESTIC USE

This warranty covers faults in the product construction. material and assembly. Products which are within 5 years material or assembly, will be repaired or exchanged with an equivalent product free of charge.

LABOUR AND SPARE PARTS

A 12 month warranty over spare parts and labour will cover spare parts which are within 1 year from the date or assembly, will be replaced free of charge.

WARRANTY CONDITIONS

This warranty will apply only under all of the following conditions:

- The item has been installed by a licensed plumber
- The item has been installed for and subjected to domestic residential use only
- Failure is due to a fault in the manufacture of the product
- Proof of purchase (including date of purchase) is provided
- The installation of the product is in accordance with the instructions provided

PLEASE NOTE: The manufacturer will not be liable for the cost of installation or removal of any unit and the warranty will be voided if damage occurred during or installed.

1 YEAR WARRANTY - COMMERCIAL USE

"Commercial" use is all use other than for normal domestic residential purposes, including use in non-business places as in public buildings, schools, sports centers and in establishments that contain private bathrooms with high frequency of use by many individuals such as hotels, motels, retirement villages and hospitals.

The commercial warranty covers this product against manufacturing faults in the construction, material and assembly of both the finished product and any spare parts for a period of 1 year from the date of purchase. Products and spare parts, which are found upon inspection by an

authorized representative to be defective in construction, material or assembly will be repaired or exchanged free of charge, The warranty conditions and exclusions, which apply to the domestic use warranty, also apply to this commercial warranty.

EXCLUSIONS

To the fullest extent permitted by law, the manufacturer excludes all liability for damage or injury to any person, damage to any property and any indirect consequential or other loss or damage.

CLAIM PROCEDURE

For all warranty gueries, customers are to contact the branch where the product was purchased. These details can be found on your purchase invoice.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be acceptable quality and the failure does not amount to a major failure.





Lune Bath Care & Maintenance

Always start your cleaning routine with the basic clean and move to a deep clean is necessary.

Basic Clean: Spills should be cleaned promptly. Clean with a mild detergent or soapy water and a soft, sponge or non-scratch scourer*1.

Deep Clean: For a deep clean and to remove cosmetics, ink and other colour agents that may leave marks on the surface use a diluted very mild abrasive cleaner* with a soft cloth in light circular motions. For stubborn marks or staining a light buff in circular motions using diluted very mild abrasive* cleaner with non-scratch scourer *1 will generally restore the finish.

Intense Clean/Repair: For extreme marks and light scratches a very light buff in circular motions using the fine grade sand/glass paper¹ will restore the surface. A heavier grade of sandpaper will scratch the surface, which can be removed by then using a light sand paper.

Softskin Basic Clean: Clean with warm soapy water or non-acidic, non-abrasive, mild detergent and soft cloth. Finish by cleaning off detergents with a soft wet cloth and towel dry.

Important notes:

For best results finish by wiping surface clean of all detergents and dry with a soft clean cloth.

Regular cleaning will assist to keep your solid surface and cabinetry looking fantastic and reduce wear and dirt build up.

For consistent appearance with your solid surface, it is best to give the entire surface of the product the same clean/sand. Avoid applying excessive pressure on clean/rub the same area for a prolonged period of time, unless repairing a scratch or damage.

Never use sharp products such as steel wool or aggressive, commercial grade / strong cleaners or chemicals (e.g. acetone, Trichloroethylene, acids and caustics soda) as these may damage and scratch the surface.

Only use your Lune bath cleaning instructions on your Lune bath as these cleaning methods may cause damage to other products, materials and finishes which will not be covered by your warranty.

¹Your basin has been supplied with a white non-scratch scourer and a fine grade sanding pad.

Please inspect items upon delivery.

If you believe there is a fault, damage or the item is incorrect, contact the place of purchase immediately, DO NOT PROCEED WITH INSTALLATION.

ONCE INSTALLED NO CLAIM OF DAMAGE WILL BE ACCEPTED


Omvivo allow 7 days from receipt of goods for notification of any discrepancies in good received.

LUNE BATH ASSEMBLY LIST

Figure 1.

*Pop up plug and waste is indicative

LUNE 1700 BATH

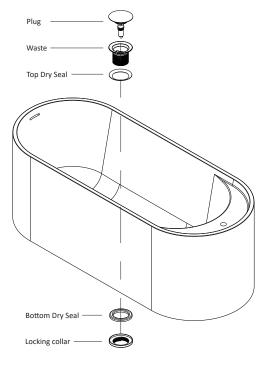

^{*} Always test 'non-scratch' and 'mild abrasive' products in a non-conspicuous area first to ensure suitability as brands can differ.



OMVIVO

LUNE BATH INSTALLATION

Determine most appropriate location and position of the bath and rough in accordingly. For waste location 1. and plumbing cavity see figure 2. NOTE: Due to physical restrictions under bath, rough in outlet must be within 175mm radius of bath waste.

Excavate the area underneath the bath at the waste point to fit appropriate plumbing fixture.

- 2. See figure 3.
 - * Plumbing fixtures are not included

Once plumbing and trap are in position, place waste through the bath and hand-tighten lock not to secure waste in bath. See figure 4.

3. * Pop up plug and waste is indicative

IMPORTANT NOTE: Ensure that as you tighten the waste, the plug is centered in the waste hole.

Complete installation of waste and bend as per best/standard plumbing practice.

Omvivo will not be held responsible for any damage that occurs to products or surrounds due to; incorrect installation; water damage or leaks.

NOTE:

- For correct waste assembly, first mount the top dry seal onto the upper waste assembly with waste cap.
- Insert the assembly into the bath, turn the overflow of the waste assembly until aligned to the overflow on the bath waste opening
- Centre the upper waste assembly to the bath, rotate the assembly until the space between the waste cap
- Securely hold the upper waste assembly while mounting the bottom dry seal onto the thread under the bath and turn the locking collar under the bath until tight, for a water-tight seal.







Figure 2.






Figure 3. *Plumbing fixture are not included

Figure 4. *Pop up plug and waste is indicative

