

CAMARO QUARTER PANEL INSTALL INSTRUCTIONS



TOOLS & MATERIALS NEEDED:



PANEL POPPER




CONTACT CEMENT



BRAZOR BLADE



RUBBER Mallet

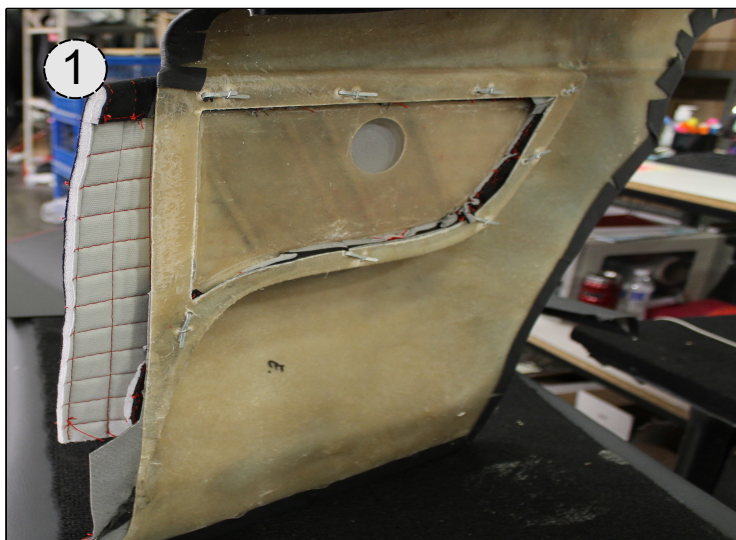

1.) THE CAMARO QUARTER PANEL COVER MATERIAL IS SHIPPED LOOSE ON THE FRONT EDGE FOR PROPER INSTALLATION. INSTALL QUARTER PANEL STARTING FROM THE TOP AT AN ANGLE MAKING SURE THE TOP OF THE PANEL CATCHES THE METAL EDGE ALONG THE BOTTOM OF THE QUARTER WINDOW.

2.) ONCE PANEL IS INSTALLED USE CONTACT CEMENT TO GLUE THE LOOSE MATERIAL TO THE METAL EDGE OF THE DOOR JAMB, MAKING SURE TO APPLY GLUE TO THE MATERIAL AND METAL FOR BETTER ADHESION, FOLD EDGE OVER ON METAL AND TRIM EXCESS MATERIAL.



3.) LET GLUE DRY BEFORE REINSTALLING THE PINCH WELT TRIM BACK ON THE DOOR JAMB EDGE USING A RUBBER Mallet TO HELP EASE THE INSTALLATION. YOU MAY NOW INSTALL THE FACTORY HARDWARE TO COMPLETE QUARTER PANEL INSTALLATION