
# **HANAMI** Design Archirivolto





2.WRINKLES (AVAILABLE ONLY IN LEATHER 7-8)
CERTIFIED 1IM



Available two types of base:

- 1. in die cast aluminium from 700 mm., "Boch" [as standard]
- 2. 4 cone shaped chrome legs
- 3. 4 spokes swivel Rovere or moka Base

#### Castors

Double tread with 65mm diameter, standard or rubber, they can be free [as standard] or with brake.

### Elevation

All Quinti gas columns are compliant to DIN 4550 norm and exceed the  $4^{\rm th}$ level.

#### Mechanisms

**M1** Aluminium Synchron Self allows the synchronized back and seta inclination adjustment with shock proof system, lockable in 4 different positions. Seat and backrest height adjustment.

**M14** Black Aluminium Synchron allows the synchronised back and seat inclination adjustment with shock proof system, lockable in 4 different positions. Seat and backrest height adjustment.

#### **Armrests**

The armchair is characterised by polyurethanic foamed upholstered armrests.

### Seat & backrest

Seat and backrest are entirely foamed. In the lumbar part two straps guarantee a better comfort.

Three heights of backrest are available, high, medium, low.






# HANAMI Design Archirivolto

# Quinti®

### **DIMENSIONS**

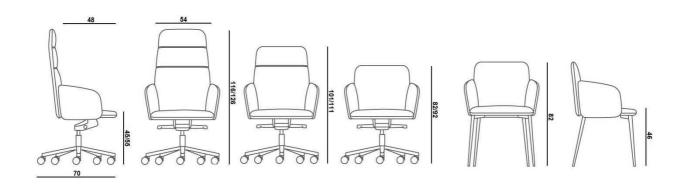



# **HANAMI** Design Archirivolto

# Quinti®

### **UPHOLSTERY**

### BIO-EXPO CATEGORY 2

300 gr/mt2 100% Propitex FR bacteriostatic Class 1UNI EN ISO 354:2003 100.000 +/- 10% cycles Martindale

### EXTREME CATEGORY 2

350 gr/mtl 100% Xtreme FR Class 1 , EN 1021-1/2 100.000 +/- 10% cycles Martindale

### LASER CATEGORY 2

560 gr/mtl 100% Polyester FR Class 1

80.000+/- 10% cycles Martindale

# ECOPELLE CATEGORY 2

630 gr/mt2 83% PVC, 17% Synthetic ISO 379-DIN75200-CSERF4/83 10% cycles Martindale

# ERA CATEGORY 3

448 gr/mtl 100% Trevira CS Class 1UNI EN ISO 354:2003 100.000 +/- 10% cycles Martindale

## LASER PLUS CATEGORY 3

630 gr/mtl 100% Polyester FR Trevira Classe1 , 4.000 +/- cycles Martindale

# ECOPELLE SOUL CATEGORY 3

760 gr/mt2 Superficies 100% POLIURETANO, Base Polyester 85%,17% Cotton EN1021-1/BS5852 PART 1 >100.000 EN ISO 5470-2

### MELANGE CATEGORY 3

390 g/lin.m 100% Trevira CS Class 1 80.000 +/- 10% cycles Martindale

### JET CATEGORY 3

365+/- 5% g/lin.m 100% Polyester FR Class 1

80.000+/- 10% cycles Martindale

# ECOPELLE SISTEMA PRO CATEGORY 3

710 gr/mt2 Surface 93% PVC Base Polyester 28% CLASSE1 100.000 CICLI

# ECOPELLE VITAX CATEGORY 3

850 gr/mt2 Surface 98% PVC 2% PU Base cotton 100% CLASSE 1 100.000 CICLI

# ONE RECICLE CATEGORY 3

525 gr/mt2 100% recycled polyester Base cotton 100% CLASSE 1IM 100.000 CICLI

### LANA CATEGORY 5

500 gr/mt2 75% Lana, 25% polyamide Class 1 100.000 cycles Martindale

### PELLE CATEGORY 5/6

620 g/lin.m 100% Cow leather Class 1, EN 1021-1/2

## PIED POULE CATEGORY 6

550 g/lin.m 66% cotton, 34% Polyester 35.000 % cycles Martindale

## **EUROPOST 2 CATEGORY 6**

710 g/lin.m 63% PU, 16% CO, 21% PL Ini1975 CLASS1emme,UNI9175/FA 50.000% cycles Martindale

### PREMIUM /ELEGANCE CATEGORY 7

100% First quality cow leather Thickness 1,2/1,4 mm EN1021-1/2

### STEELCUT TRIO CATEGORY 7

770 g/lin.m 90% New wool worsted, 10% Nylon Class 1, EN 1021-1/2 100.000 % cycles Martindale

### REMIX CATEGORY 7

415 g/lin.m 90% New wool worsted, 10% Nylon Class 1, EN 1021-1/2 100.000 % cycles Martindale

# VELLUTO DECONTRACTE' CATEGORY 7

590 g/lin.m 19% CO, 61% PC,10% PL, 10%VI 40.000 % cycles Martindale

### MERIT CATEGORY 7

500g/lin.m 76% Polyester Recycled 24% Polyester EN 1021-1/2 85.000 % cycles Martindale

# VELLUTO CATEGORY 8

600 g/lin.m 100.000 % PL Flame retardant

## PELLE SOFT CATEGORY 8

100% Cow leather Thickness,8-2 mm Aniline treatment – First quality EN1021-1/2





### **USAGE AND CARE**

For a proper maintenance of the products and to maintain unchanged the characteristics of the materials, we recommend to follow some very simple care instructions.

### **FABRICS**

Cleaning: check the dedicated selection written on the color Swatch card. Usage: it is recommended to pay attention to the fabrics as they can be easily cut or ripped.

### **LEATHERS**

Cleaning: clean with a white wet cloth with water. We recommend to use high quality products for the cleaning of the leather and to follow carefully the instructions of the manufacturer. In doubt, try out the product on a hidden part and wait at least 24 hours for the occurrence of any problems. Usage: remember that the leather is a delicate material therefore, it is recommended to pay particular attention while using.

### WOODS

Cleaning: clean with a soft and wet cloth with warm water. We always recommend to dry immediately after the cleaning process. All liquids or other residue must be removed in order to avoid the absorption. Usage: wooden surfaces, being a natural material, could be affected by an alteration of the color shade during time and use. We also remind that wooden surfaces cannot bear with high temperatures if placed directly on the wooden top.

### **METALS**

Cleaning: both steel or aluminum surfaces, and painted ones, must be cleaned with a soft and wet cloth with hot water. For the most persistent stains, a small amount of liquid soap diluted in water may be used. We always recommend to dry immediately with a soft cloth or a leather one after the cleaning process. Never using cleaning products for steel, chlorine, bleach or other strong detergents. It is not recommended to use abrasive creams, score pads and abrasive sponges that can scratch the metal surfaces. Usage: pay attention to the stains of food such as coffee, coke, fruit juices that can leave indelible marks on the surface.

### **WARRANTY**

QUINTI guarantees the products will maintain their properties for 6 years from delivery, except normal usury and provided that they will be used according to the guidelines given. QUINTI will replace, free of charge, any product found non-compliant with this warranty, without incurring any other liability of sort. Components, external accessories or materials supplied by the buyer and applied to the products in order to customize them will not be supported by the guarantee. For an optimal maintenance of the products and to keep unchanged the characteristics of the materials with which they are made, some simple attentions are necessary.