

SUGAR R Quinti®



Operative armchair with high backrest from Quinti Collection. The seat far exceed the minimum requests of DL 626/94, and DL.81. It is in accordance with EN1335A and approved 1IM.

Base

1. Base in black polypropylene "LOOP". [d. 680]
2. Base in shiny aluminum "LOOP". [d. 680]
3. Base in white polypropylene "TREND". [d. 680]

Castors & Feet

Double tread diam 65 mm, standard or rubberized, both can be free [standard] or self-braking. The feet in polyamide are interchangeable to the castors with the same locking pin at the base.

Elevation

All Quinti's gas columns are in accordance with the DIN4550 norm and they exceed the fourth level.

Mechanics

Sugar can have 2 versions of mechanism:

1. Synchron self weighting M12
2. Synchron M1,M1 [optional]

Armrests

Available both with or without armrests; armrests are adjustable in height, 3d adjustable with soft pad or fixed.

Seat & backrest

Seat. The inner part is made with high resistant polypropylene with 2 steel bars. Adequately upholstered with high density polyurethane, the seat is covered with every fabrics from Quinti Colours System. It is upholstered with expanded high density non-deformable polyurethane of 50 mm of thickness

Backrest. Available both with the BLACK structure and WHITE in large and comfortable net, supplied in both cases of lumbar adjustable support. Upholstered with polyurethane rubber thickness 2 cm


Accessories

two types of headrests are available:

- in soft black polyurethane adjustable in height
- covered and adjustable in height and depth
- seat translator
- adjustable in height and depth lumbar support

SUGAR R **Quinti**[®]

DIMENSIONS

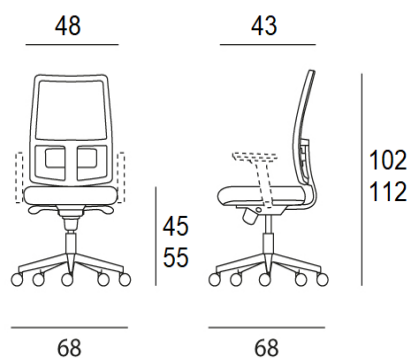

UPHOLSTERY

BIO-EXPO
CATEGORY 2
300 gr/mt2
100% Propitex FR bacteriostatic
Class 1 UNI EN ISO 354:2003
100.000 +/- 10% cycles Martindale

EXTREME
CATEGORY 2
350 gr/mtl
100% Xtreme FR
Class 1 , EN 1021-1/2
100.000 +/- 10% cycles Martindale

LASER
CATEGORY 2
560 gr/mtl
100% Polyester FR
Class 1
80.000+/- 10% cycles Martindale

ECOPELLE
CATEGORY 2
630 gr/mt2
83% PVC, 17% Synthetic
ISO 379-DIN75200-CSERF4/83 10%
cycles Martindale

ERA
CATEGORY 3
448 gr/mtl
100% Trevira CS
Class 1 UNI EN ISO 354:2003
100.000 +/- 10% cycles Martindale

LASER PLUS
CATEGORY 3
630 gr/mtl
100% Polyester FR Trevira
Classe1 , 4.000 +/- cycles Martindale

ECOPELLE SOUL
CATEGORY 3
760 gr/mt2
Superficies 100% POLIURETANO,
Base Polyester 85%,17% Cotton
EN1021-1/BS5852 PART 1
>100.000 EN ISO 5470-2

MELANGE
CATEGORY 3
390 g/lin.m
100% Trevira CS
Class 1
80.000 +/- 10% cycles Martindale

JET
CATEGORY 3
365+/- 5% g/lin.m
100% Polyester FR
Class 1
80.000+/- 10% cycles Martindale

ECOPELLE SISTEMA PRO
CATEGORY 3
710 gr/mt2
Surface 93% PVC
Base Polyester 28%
CLASSE1
100.000 CICLI

ECOPELLE VITAX
CATEGORY 3
850 gr/mt2
Surface 98% PVC 2% PU
Base cotton 100%
CLASSE 1
100.000 CICLI

ONE RECICLE
CATEGORY 3
525 gr/mt2
100% recycled polyester
Base cotton 100%
CLASSE 1IM
100.000 CICLI

LANA
CATEGORY 5
500 gr/mt2
75% Lana, 25% polyamide
Class 1
100.000 cycles Martindale

PELLE
CATEGORY 5/6
620 g/lin.m
100% Cow leather
Class 1, EN 1021-1/2

PIED POULE
CATEGORY 6
550 g/lin.m
66% cotton, 34% Polyester
35.000 % cycles Martindale

EUROPOST 2
CATEGORY 6
710 g/lin.m
63% PU, 16% CO, 21% PL
Ini1975 CLASS1emme,UNI9175/FA
50.000% cycles Martindale

PREMIUM /ELEGANCE
CATEGORY 7
100% First quality cow leather
Thickness 1,2/1,4 mm
EN1021-1/2

STEELCUT TRIO
CATEGORY 7
770 g/lin.m
90% New wool worsted, 10% Nylon
Class 1, EN 1021-1/2
100.000 % cycles Martindale

REMIX
CATEGORY 7
415 g/lin.m
90% New wool worsted, 10% Nylon
Class 1, EN 1021-1/2
100.000 % cycles Martindale

VELLUTO DECONTRACTE'
CATEGORY 7
590 g/lin.m
19% CO, 61% PC, 10% PL, 10%VI
40.000 % cycles Martindale

MERIT
CATEGORY 7
500g/lin.m
76% Polyester Recycled
24% Polyester
EN 1021-1/2
85.000 % cycles Martindale

VELLUTO
CATEGORY 8
600 g/lin.m
100.000 % PL Flame retardant

PELLE SOFT
CATEGORY 8
100% Cow leather Thickness,8-2 mm
Aniline treatment – First quality
EN1021-1/2

USAGE AND MAINTENANCE

In order to have an optimal maintenance of the products and to preserve the characteristics of the materials by which they are made, it is recommended the following course of action.

FABRICS

Cleaning: check the dedicated selection written on the color Swatch card.

Usage: it is recommended to pay careful attention to the fabrics as they can be cut or ripped easily.

WOODS

Cleaning: clean using a soft cloth, soaked in tepid water. Dry always after the cleaning. Remove immediately any liquid substances or other residue in order to prevent the absorption.

Usage: wooden surfaces, being a natural material, might be subjected to color alterations with sun exposure and use over time. It is reminded that wooden surfaces cannot endure direct heat sources.

METALS

Cleaning: both steel and aluminum surfaces, and the painted ones, have to be cleaned using a soft cloth soaked in tepid water. For the most persistent stains it is possible to dilute mild soap with water moderately. Dry always after the cleaning, using a soft cloth of deer-hide. Do not use cleaning products for steel, chlorine, bleach or other strong products. It is not recommended to use abrasive, scourers, which can scratch the metal surfaces.

Usage: pay attention to the food stains as coffee, coke, fruit juices that can make indelible marks on the surfaces.

WARRANTY

QUINTI guarantees the products will maintain their properties for 6 years from delivery, except normal usury and provided that they will be used according to the guidelines given. QUINTI will replace, free of charge, any product found non-compliant with this warranty, without incurring any other liability of sort. Components, external accessories or materials supplied by the buyer and applied to the products in order to customize them will not be supported by the guarantee. For an optimal maintenance of the products and to keep unchanged the characteristics of the materials with which they are made, some simple attentions are necessary.