

# RANGE DESIGN

## TRICO 2000

### Medium pressure water transport hose for frequent use.

Inserted into the Design range, the TRICO 2000 is an excellent three-layer flexible PVC hose, with a good distribution of layer wall thicknesses, which makes it suitable for frequent use at medium pressures.



$\varnothing_{int}$ (mm)	$\varnothing_{ext}$ (mm)	Weight (g/m)	Burst pressure (bar)	Coil length (m)	Tensile resistance
12,5 (1/2")	16,9 ± 0.5	125	17	15   25   50	Stress at break: ≥ 5 MPa Elongation at break: ≥ 150% Adhesion between layers: ≥ 12 N / cm
15 (5/8")	20,3 ± 0.5	180	17	15   25   50	
19 (3/4")	25,3 ± 0.5	270	17	15   25   50	
25 (1")	31,9 ± 0.5	380	17	25   50	

Distribution of the 3 layers:

1. Flexible PVC layer, white.
2. Layer knitted with high strength polyester yarn, white.
3. Flexible PVC layer, crystal blue.


### Other characteristics

**Material:** Flexible poly (vinyl chloride), phthalate free plasticizers, to which the remaining additives have been added to help in production. The material used does not contain lead, cadmium and barium.


**Marking:** The hose is marked every 1 m/1.5 m with the following:

*Ibotec Design Trico 2000  $\varnothing$ xx + Ibotec traceability code*


#### Characteristics of Design range

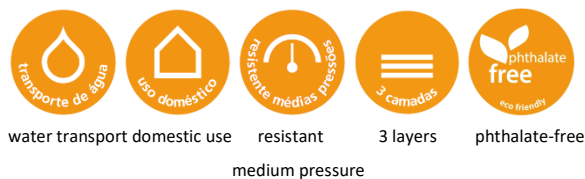

#### Options

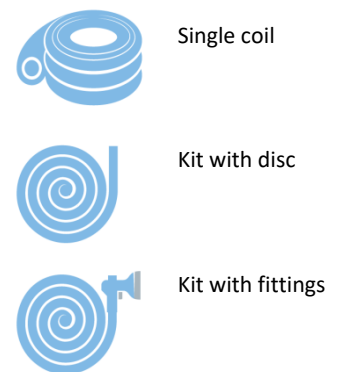

#### Characteristics of TRICO 2000

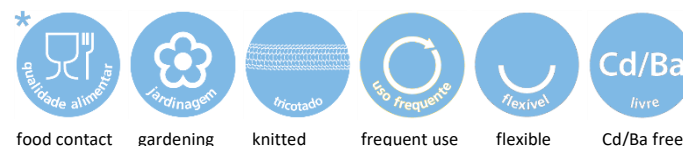

\* Food simulant C of UE regulation 10/2011 (all aqueous and alcoholic foods up to an alcohol content of 20 % vv).

Frequently used for water transport at medium pressures (up to 5,7 bar at +23 °C and up to 3,7 bar at +55 °C), in gardening and at home, at ambient temperature -10 °C/+60 °C.

### Some instructions for use:

The fittings to be used with this hose are in plastic with the click system for suitable and easy connection. It can be cut with a knife or scissors. Care should be taken to avoid pinching the hose, especially with heavy machinery or equipment.

To increase the durability of the hose, it should be used within the stated pressure limits. It should be kept clean and kept free of water after each use, in a place protected from intense sunlight.

The characteristics can be improved as a result of improvements and technological progress.

Our Quality Department is at your disposal for any clarification.

Information and data are believed to be accurate and secure.

**IBOTEC.**  
HIGH TECH PIPES

Apartado 2037 . 3701-906 Cesar – Portugal  
Tel.: +351 256 850 130 – Fax: +351 256 850 139  
ibotec@ibotec.pt – www.ibotec.pt