

EcoValue Slim Panel Wafer Downlights

5-CCT Selectable

Canless Downlights



Detail Specifications:

- Finish: White
- Wet Location Rated
- Beam Angle: 110°
- Chip: SMD 2835, R9 >50, CRI >90
- Operating Temperature: -40° - 114° F
- Lens: Frosted acrylic
- Average life (L70) of 30,000 hours

Applications:

- General Recessed Lighting
- Residential & Multifamily
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality

Product Information:

- 5-CCT Selectable: 27/30/35/40/50K
- Edge-lit technology: reduces glare with even light distribution
- Perfect for shallow ceilings. Only 1.5" space required.
- Metal housing and trim for better heat dissipation
- Standard white round trim included: optional trims available
- Optional emergency backup available: delivers full lumens in EM mode up to 25W
- SnapTrim Canless: Spring clips with remote j-box eliminates can

Driver Options:

- 120V Triac Dimmable
- Built in 2.5Kv Surge Protector
- Flicker Free

Mounting & Installation:

- Cut Out Dimensions
 - 4": 4.33"
 - 6": 6.33"
- Optional new construction plate available
- This fixture does not fit into a recessed can
- No can needed in remodel applications, tension clips mount into 1/2" to 1.5" thick ceiling
- Can be removed from below the ceiling for service or replacement
- Pre-wired junction box with circuit wiring built in (3 in/ 3 out)

Certifications:

- ETL Listed for USA and CA
- Energy Star Certified
- CA Title 24 JA8-2022 CEC Listed
- 3 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017
- IC Rated and ASTM-E283 Air-Tight

Series

ECV-WFR-4-9W-5CCT


9W • 720Lm

ECV-WFR-6-12W-5CCT

12W • 1,000Lm

Specs and model numbers are subject to change with or without notice. Customization of product is available.

FEATURES




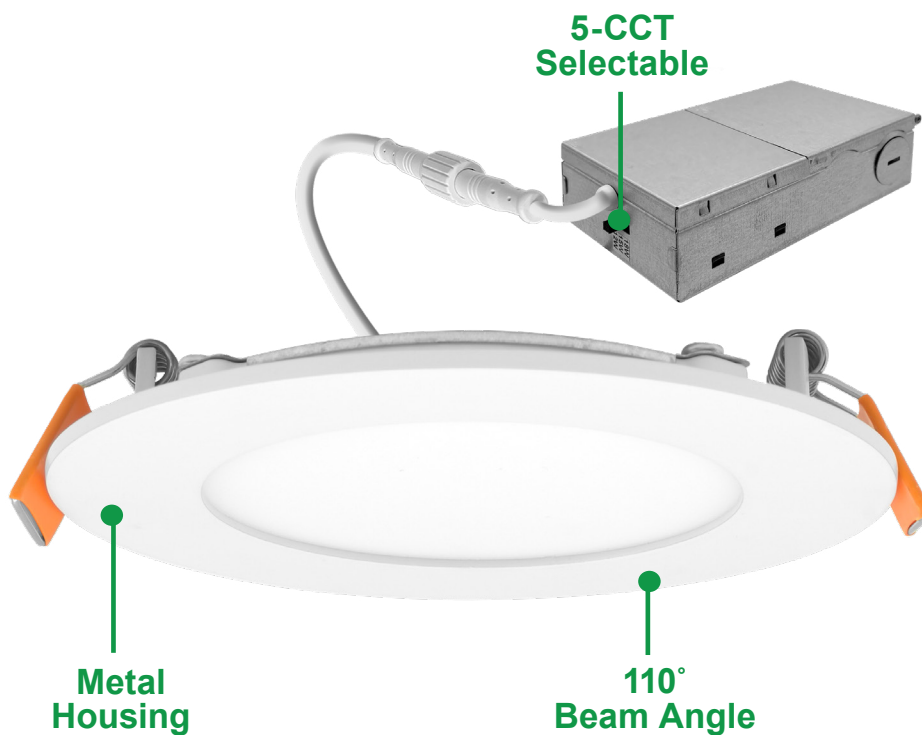


TESTED COMPATIBLE DIMMERS

Other dimmers may be compatible but have not been tested. Please contact us for more information.

Lutron	Leviton	Legrand	Cooper
AYCL-153P	NTELV-300P	6633	ADTP703TU
DV-600PR	S-600P	6674	H703PTW
DVCL-153P	CT-600P	6602	DAL06P
MACL-153MH	CTCL-153P	IPL06	
MRF2-6CL	TG-600P		
D-600P	TCCL-153P		

DIMENSIONS

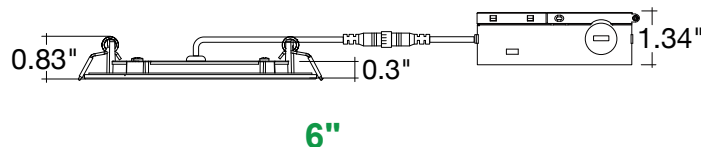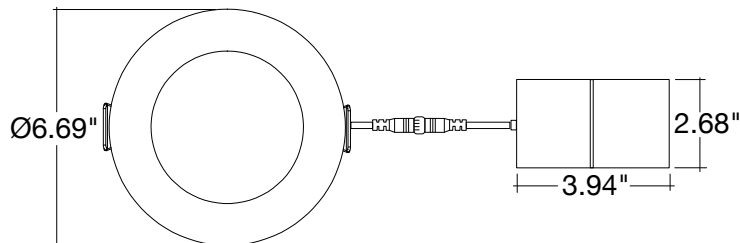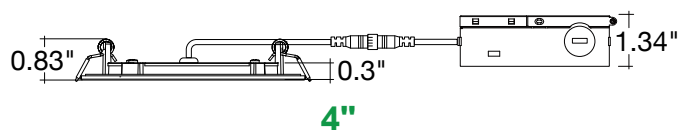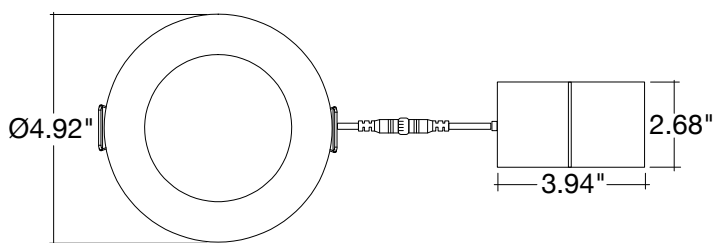

Specs and model numbers are subject to change with or without notice. Customization of product is available.