

EQUIVALENT SOUNDABSORPTION AREA PER OBJECT (average) conform ISO 354:2003

Principal: BuzziSpace




Variant 7: BuzziTripl (version with rounded corners)

w x h: 1 x (1800 x 410 mm)
1 x (1580 x 340 mm)
1 x 1420 x 420 mm)



— 1/3 oct.
* 1/1 oct.

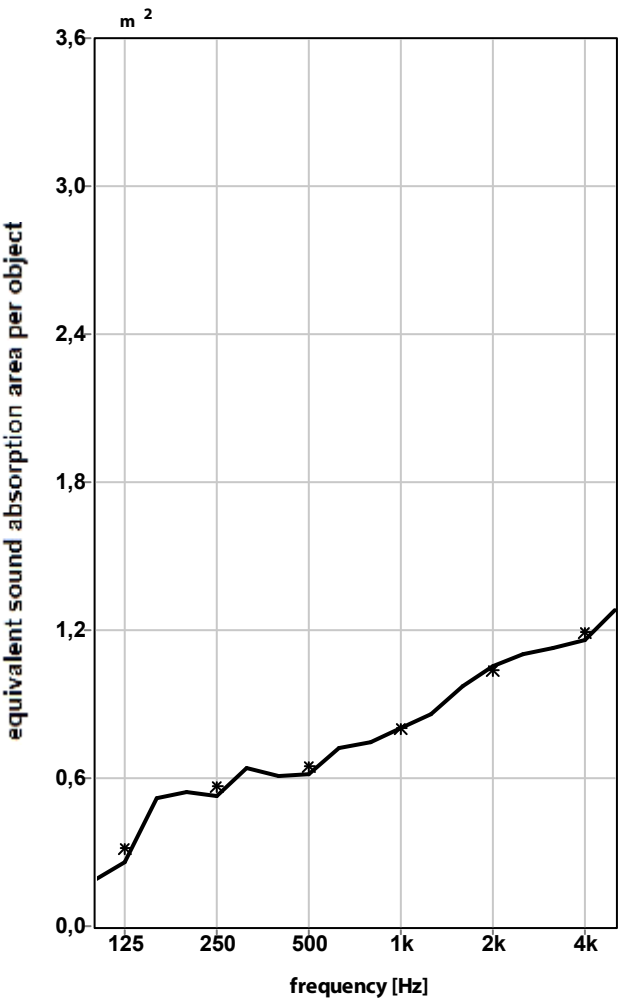

volume reverberation room: 214 m³

number of elements during measurements: 3

measured at: Peutz Laboratory for Acoustics

signal: broad-band noise

bandwidth: 1/3 octave

	0,19	0,54	0,61	0,75	0,97	1,13
1/3 oct.	0,26	0,53	0,62	0,80	1,05	1,16
	0,52	0,64	0,72	0,86	1,10	1,28
1/1 oct.	0,32	0,57	0,65	0,80	1,04	1,19

publication is permitted for the entire page only

Mook, measured at 05-02-2020

report A 3470-6E-RA

figure 11

Absorb, versie 5.9 mode 9, PM: MH, file: a3470 E#:2093-2128 F#:2438-2473 A#:2474 T₁ = 18,0 °C T₂ = 17,6 °C p₁ = 103,2 kPa p₂ = 103,4 kPa h₁ = 47,4 % h₂ = 49,9 %