
BuzziDesk

Product Specification Sheet

This document contains technical information about the BuzziDesk



www.buzzi.space



Desk divider screen with metal profile

Not only does the BuzziDesk safeguard your privacy at work; it keeps out your colleagues' irritating telephone or computer sounds as well. This workspace divider also hides your cable clutter and computer screen in an orderly fashion. It is easy to install in any office, and with its tactile appearance and colorful tint it will make every working day feel like a party!

Design by BuzziSpace Studio

General

 BuzziDesk

Cover: BuzziFelt

Core: honeycomb cardboard

 Profile: metal

Stitch: on Felt / Fabric: Always OffWhite (except for BuzziDesk OffWhite, Natural, Ivory → Stitch Anthracite)

 Min. W 57 cm | W 22.44" H 34 cm | H 13.39"
Max. W 200 cm | W 78.74" H 80 cm | H 31.50"

 Dry use

 Flat Packed

Extra layer Fabric, Trevira CS, Reflect, Revive 1, Velvet, Clara 2, Remix 3, Hero 2, Tonus 4, Arda, Memory 2

...

Bicolor

Rounded or straight-angled

Certifications



Acoustics



Absorption



Diffusion



Attenuation



Mid tone




High tone

Content

Configurations	3	Dimensions	10
BuzziFix overview	5	Acoustics	14
Fabrics	7		

Configurations

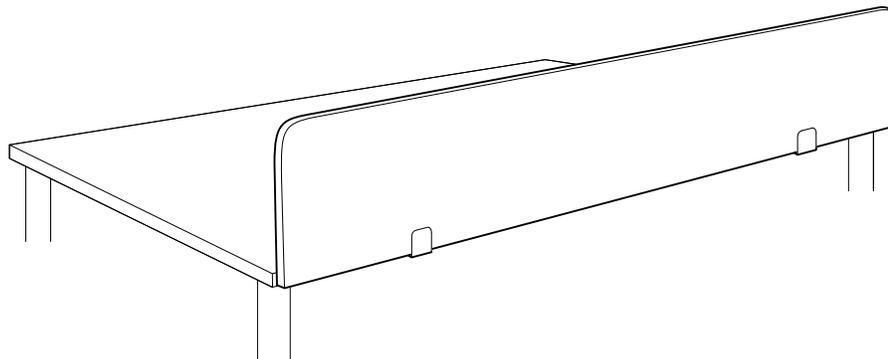

📌 BuzziDesk

Cover: BuzziFelt

Core: honeycomb cardboard

🌲 Profile: metal

Stitch: on Felt / Fabric: Always OffWhite (except for BuzziDesk OffWhite, Natural, Ivory > Stitch Anthracite)

D: 3,5 cm | 1.38"

✂ Min. W 57 cm | W 22.44" H 34 cm | H 13.39"
Max. W 200 cm | W 78.74" H 80 cm | H 31.50"

Width

Weight Profile + Weight cardboard + Felt

≥ 57 cm	< 77 cm	0,65 kg	3,30 kg/m ²
≥ 22.44"	< 30.32"	1.43 lbs	0.68 lbs/ft ²
≥ 77 cm	< 107 cm	0,75 kg	3,30 kg/m ²
≥ 30.32"	< 42.13"	1.65 lbs	0.68 lbs/ft ²
≥ 107 cm	< 137 cm	0,90 kg	3,30 kg/m ²
≥ 42.13"	< 53.94"	1.98 lbs	0.68 lbs/ft ²
≥ 137 cm	< 157 cm	1,15 kg	3,30 kg/m ²
≥ 53.94"	< 61.81"	2.54 lbs	0.68 lbs/ft ²
≥ 157 cm	< 177 cm	1,25 kg	3,30 kg/m ²
≥ 61.81"	< 69.69"	2.76 lbs	0.68 lbs/ft ²
≥ 177 cm	< 200 cm	1,35 kg	3,30 kg/m ²
≥ 69.69"	< 78.74"	2.98 lbs	0.68 lbs/ft ²

For Example:

BuzziDesk W 160 cm H 40 cm → 1,25 kg + (0,64 m² x 3,30 kg/m² = 2,11 kg) = 3,36 kg in total
BuzziDesk W 62.99" H 15.75" → 2.76 lbs + (6.89 ft² x 0.68 lbs/ft² = 4.69 lbs) = 7.45 lbs in total

Extra layer Fabric, Trevira CS, Reflect, Revive 1, Velvet, Clara 2, Remix 3, Hero 2, Tonus 4, Arda, Memory 2


...

Bicolor

Rounded or straight-angled

Round or straight edges

- Round or straight edges
- Stitch on Felt / Fabric: Always OffWhite (except for BuzziDesk OffWhite, Natural, Ivory → Stitch Anthracite)

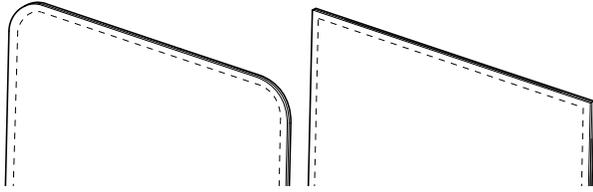

BuzziFix Overview

BuzziFix is available in powder coated metal Black (RAL 9005) or White (RAL 9010)

Use 2 pcs/BuzziDesk except for BuzziFix Foot: 1 pc/BuzziDesk

Thin: 0,3 cm | 0.12" metal thickness

Thin F L | F L-Plus | F XL

L

Worktop: 12 > 27 mm
0.47" > 1.06"




L-Plus

Worktop: 18 > 43 mm
0.71" > 1.69"




XL

Worktop: 28 > 57 mm
1.10" > 2.24"




Worktop

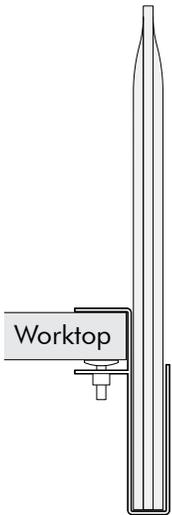

Thin Y L | L-plus | XL


L

Worktop: 12 > 27 mm
0.47" > 1.06"




L-Plus

Worktop: 18 > 43 mm
0.71" > 1.69"




XL

Worktop: 28 > 57 mm
1.10 > 2.24"




Worktop

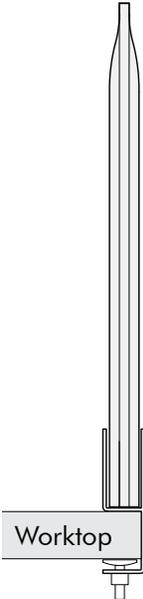


Thin U

Excl. screws



Worktop

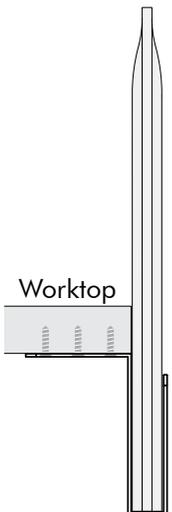


Twin Light

Worktop: Max. 30 mm
1.18"



Worktop

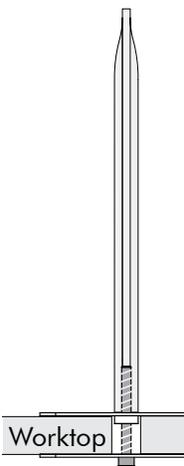


Magnet Bold

For metal surface




Optional metal desk mounting plate. To be screwed or taped on a surface.



Worktop

Foot

3x Screws included
(M6 x 20)

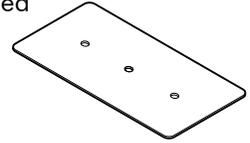


Worktop

Magnet & Foot only to be used for BuzziDesk: H ≤ 40 cm | 15.75" and W ≤ 160 cm | 62.99"

Fabrics

Felt (15 colors)

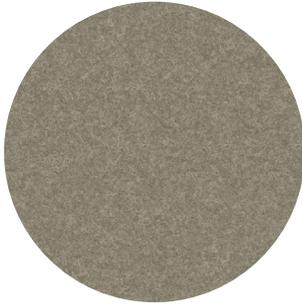

Composition 100% Recycled PE.T. Felt, latex backing

Weight 1.000 g/m² | 29.49 oz/yd²

Abrasion resistance >7.000 Martindale

Flammability EU: EN 13501.1 + A1/2009 Class B-s1,d0


USA: ASTM E84 Class A certified

Bottle, Mustard, Mint, Nude: USA: ASTM E85 Class C Certified

Fastness to light USA 5



Fabric (45 colors)

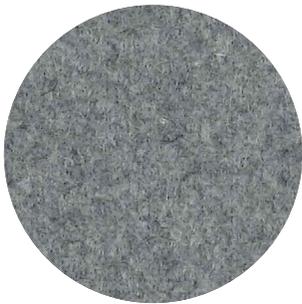

Category A

Composition 70% Recycled Wool, 25% Recycled Polyacryl,
5% Recycled Other Fabrics

Weight 405 g/m² | 11.94 oz/yd²

Abrasion resistance 40.000 Martindale, 50,000 Wyzenbeek

Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette).

EN 1021.2/2006 | BS EN 1021.2/2006 (match)

USA: CAL TB 117 | ASTM E84 CLASS A


Fastness to light EU: 4 | USA 4

Fastness to rubbing EU: Wet 3-4 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Trevira CS (47 colors)

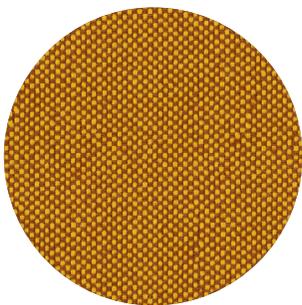

Category A

Weight 420 g/m² | 12.39 oz/yd²

Composition 100% Polyester, Trevira CS

Abrasion resistance 100.000 Martindale, 90,000 Wyzenbeek

Flammability BS 5852 part II: CRIB 5 | BS 7176 Medium Hazard

USA: CAL TB 117 | M1 | B1 | EN 1021/1-2 | C1 |

IMO Res. A652 (16)

Fastness to light EU: 6 | USA 5


Fastness to rubbing EU: Wet 4-5 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Reflect (34 colors)

kvadrat

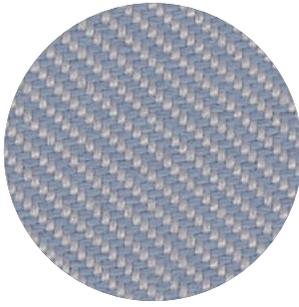

Category A

Weight 430 g/m² | 13.78 oz/yd²

Composition 100% Post-consumer recycled polyester

Abrasion resistance 100.000 Martindale

Flammability AS/NZS 3837 class 1 | ASTM E84 Class A Unadhered

ASTM E84 Class B Adhered | BS 5852 crib 5 with treatment

BS 5852 part 1 with treatment | EN 1021-1/2 | US Cal. Bull. 117-2013

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing EU: Wet 5-5 | Dry 5-5

Pilling Note 4, EN ISO 12945



Revive 1 (25 colors)

kvadrat

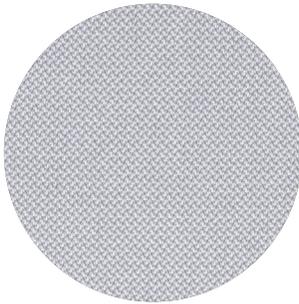

Category A

Composition 100% recycled polyester FR

Weight 430 g/lin.m

Abrasion resistance 60.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1

UNI 9175 1IM | US Cal. Tech. Bull. 117

IMO A.652 (16)


Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 5, wet 4-5

Pilling Note 4-5, EN ISO 12945



Velvet (12 colors)

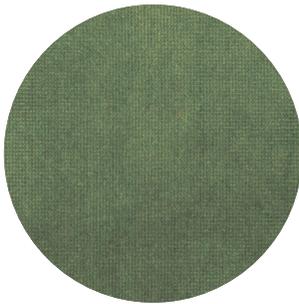

Category A

Weight 420 g/m² | 12.39 oz/yd²

Composition 100% Polyester, Trevira CS

Abrasion resistance 100.000 Martindale, 90,000 Wyzenbeek

Flammability BS 5852 part II: CRIB 5 | BS 7176 Medium Hazard

USA: CAL TB 117 | M1 | B1 | EN 1021/1-2 | C1 |

IMO Res. A652 (16)

Fastness to light EU: 6 | USA 5


Fastness to rubbing EU: Wet 4-5 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Clara 2 (24 colors)

kvadrat

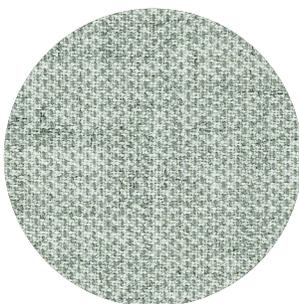

Category B

Composition 92% new wool, 8% nylon

Weight 400 g/lin.m

Abrasion resistance 80.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852, ignition source 2-3 | DIN 4102 B2

NF D 60 013 | UNI 9175 1IM | US Cal. Tech. Bull. 117, Sec. E

NFPA 260 | IMO A.652(16)

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 4, EN ISO 12945



Remix 3 (73 colors)

kvadrat



Category B

Composition 90% new wool, 10% nylon

Weight 415 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1

Önorm B1/Q1 | NF D 60 013 | UNI 9175, 11M

AS/NZS 1530.3 | Cal. Tech. Bull. 117-2013

NFPA 260 | IMO FTP Code 2010:Part 8

Fastness to light Note 5-7, ISO 105-B02


Fastness to rubbing (ISO) dry 4-5, wet 4

Pilling Note 4, EN ISO 12945



Hero 2 (33 colors)

kvadrat

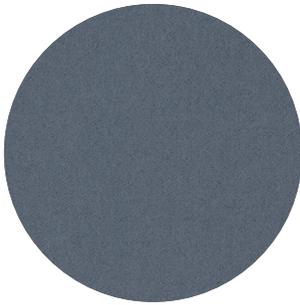

Category C

Composition 97% new wool, 3% nylon

Weight 580 g/lin.m

Abrasion resistance 45.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B2 | NF D 60 013

UNI 9175 11M | US Cal. Bull. 117-2013 | NFPA 260

IMO A.652 (16)

Fastness to light Note 5-6, ISO 105-B02

Fastness to rubbing (ISO) dry 4-5, wet 4-5

Pilling Note 3-4, EN ISO 12945



Tonus 4 (47 colors)

kvadrat



Category D

Composition 90% new wool, 10% Helanca

Weight 665 g/lin.m

Abrasion resistance 100.000 Martindale rubs, EN ISO 12947

Flammability EN 1021-1/2 | BS 5852 part 1 | DIN 4102 B2

Önorm B1/Q1 | NF D 60 013 | UNI 9175 11M

US Cal. Bull. 117-2013 | NFPA 260 | IMO A.652 (16)

Fastness to light Note 5-7, ISO 105-B02

Fastness to rubbing (ISO) dry 3-5, wet 3-5

Pilling Note 3, EN ISO 12945



Arda (12 colors)

kvadrat



Category E

Composition 70% new wool 21% polyester 9% nylon

Weight 800 g/lin. m | 25.8 oz/ly

Abrasion resistance

Approx. 50.000 Martindale rubs, EN ISO 12947

Flammability ASTM E84 Class A Unadhered | AS/NZS 3837 class 2 | BS 5852 part 1
BS 5852 crib 5 | DIN 4102 B2 | EN 1021-1/2 | IMO FTP Code 2010 Part 8
UNI 9175 1IM | US Cal. Bull. 117-2013

Fastness to light Note 5-8, ISO 105-B02


Fastness to rubbing Dry note 3-5 ISO 105-X12
Wet note 3-5 ISO 105-X12

Pilling Note 4, EN ISO 12945



Memory 2 (20 colors)

kvadrat

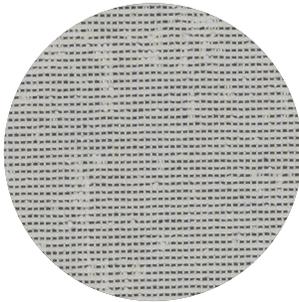

Category E

Composition 100% Trevira CS

Weight 700 g/lin.m

Abrasion resistance

35.000 rubs acc. to the Martindale method, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1
NF D 60 013 | NF P 92 507 M1 | UNI 9175 1IM
UNI 9177 classe 1 | US Cal. Tech. Bull. 117
IMO A.652 (16)

Fastness to light Note 5-8, ISO 105-B02



Fastness to rubbing (ISO) dry 4-5, wet 4-5

Pilling Note 4, EN ISO 12945




Dimensions


Desk

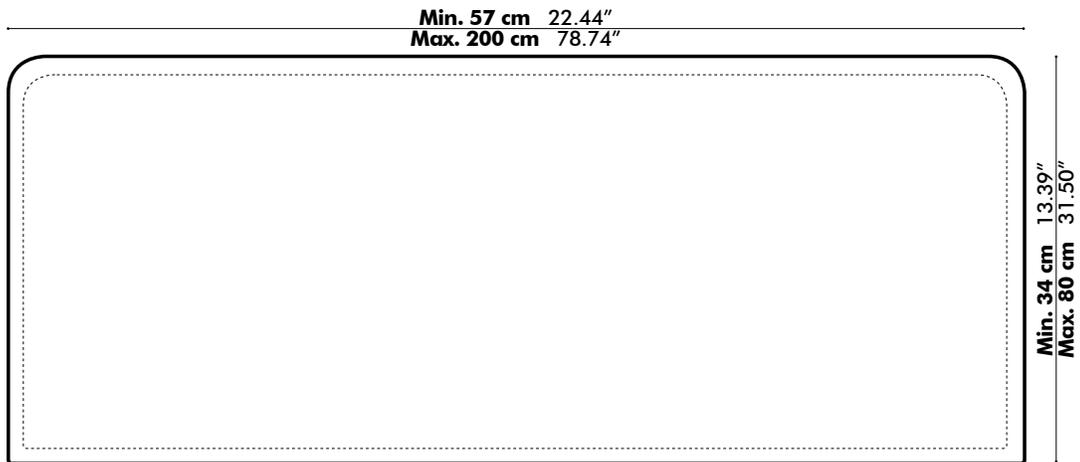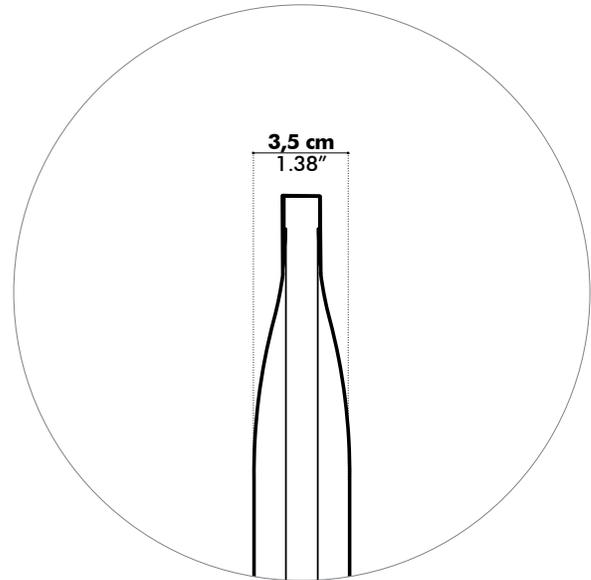


Profiles

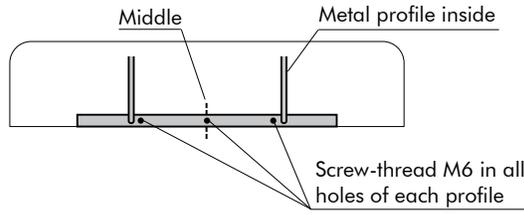


BuzziDesk
 W: ≥ 57 cm < 77 cm
 W: ≥ 22.44" < 30.31"

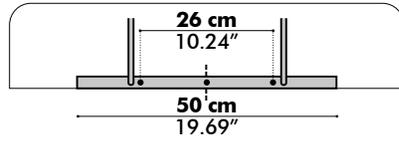


BuzziDesk
 W: ≥ 77 cm < 107 cm
 W: ≥ 30.31" < 42.13"

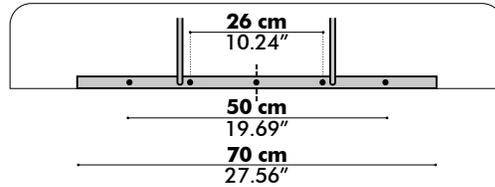


BuzziDesk
 W: ≥ 107 cm < 137 cm
 W: ≥ 42.13" < 53.94"

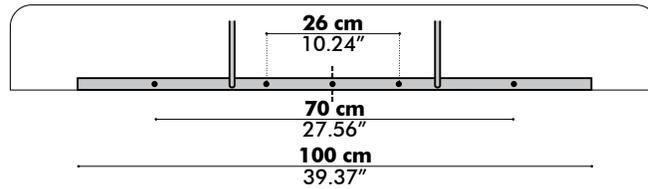


BuzziDesk
 W: ≥ 137 cm < 157 cm
 W: ≥ 53.94" < 61.81"

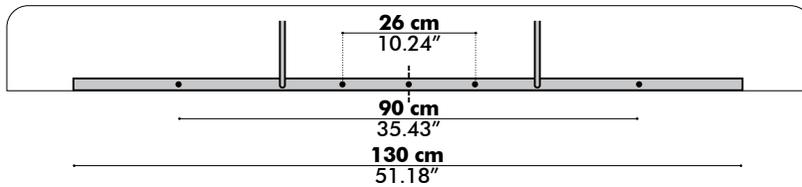

BuzziDesk
 W: ≥ 157 cm < 177 cm
 W: ≥ 61.81" < 69.69"

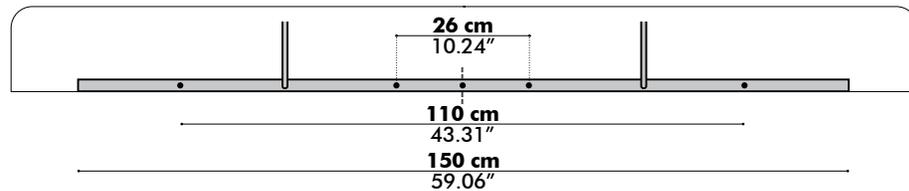


BuzziDesk
 W: ≥ 177 cm < 200 cm
 W: ≥ 69.69" < 78.74"

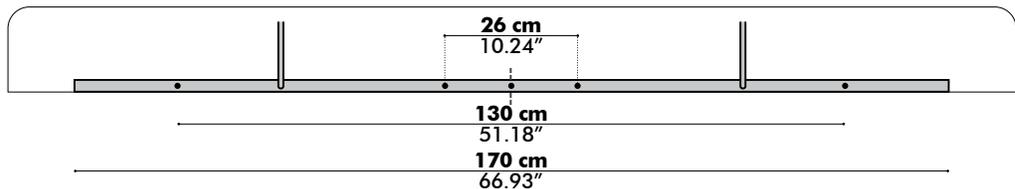

BuzziFix


Thin (metal thickness 0,3 cm | 0.12")

F L

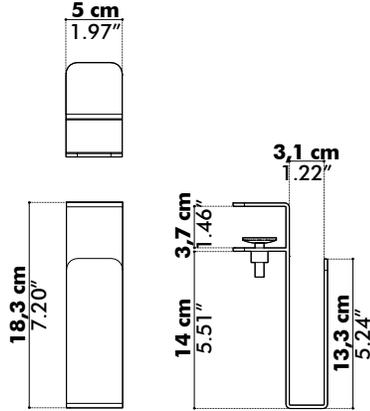


540 g/pc | 1.19 lbs/pc

F L-Plus

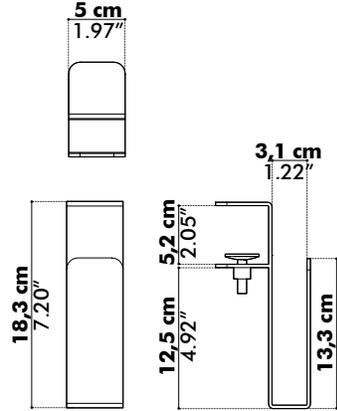

540 g/pc | 1.19 lbs/pc


F XL

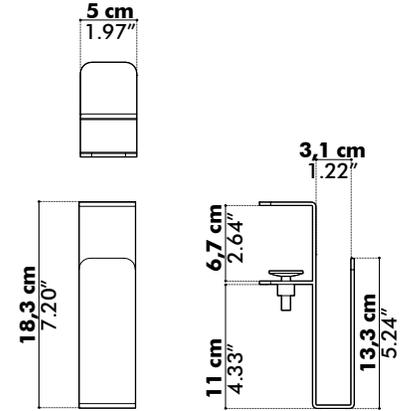

540 g/pc | 1.19 lbs/pc


Thin (metal thickness 3 mm)

Y L

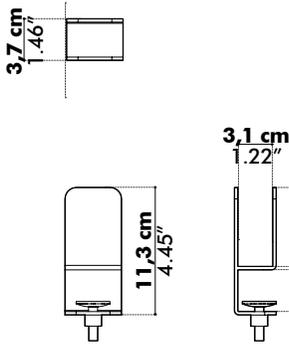


315 g/pc | 0.69 lbs/pc

Y L-Plus

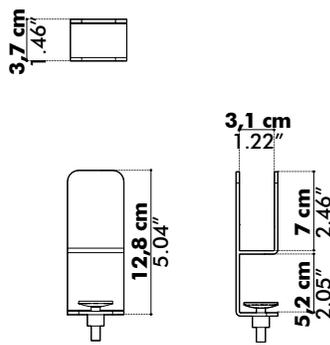

325 g/pc | 0.72 lbs/pc


XL

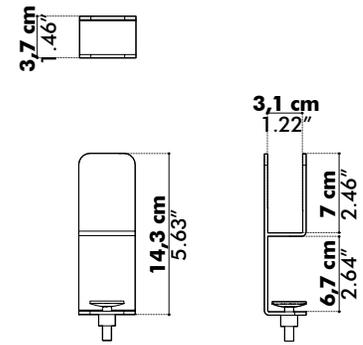

350 g/pc | 0.77 lbs/pc

Thin (metal thickness 0,3 cm | 0.12")


U

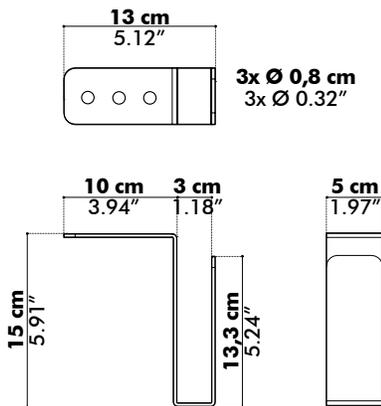

475 g/pc | 1.05 lbs/pc


Thin (metal thickness 0,2 cm | 0,07")

Twin

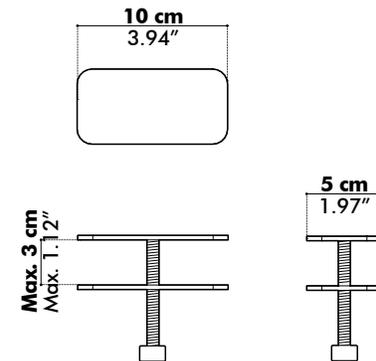


170 g/pc | 0.38 lbs/pc

Magnet




⚖ 46 g/pc | 0.10 lbs/pc

Optional mounting plate for Magnet



⚖ 30 g/pc | 0.07 lbs/pc

Thin Foot

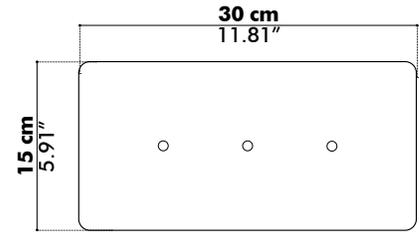


⚖ 1600 g/pc | 3.53 lbs/pc

Acoustics

BuzziDesk

Equivalent sound absorption area in m² per object

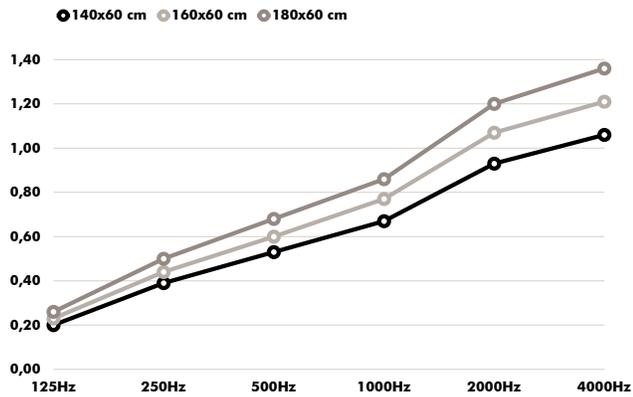

Hz	140x60 cm Aeq/m ²	160x60 cm Aeq/m ²	180x60 cm Aeq/m ²
125	0.20	0.23	0.26
250	0.39	0.44	0.50
500	0.53	0.60	0.68
1000	0.67	0.77	0.86
2000	0.93	1.07	1.20
4000	1.06	1.21	1.36