

---

# BuzziBrickBack

## Product Specification Sheet

---

This document contains technical information about the BuzziBrickBack

---



[www.buzzi.space](http://www.buzzi.space)



## Self-adhesive wall panel in sliced BuzziFelt

BrickBack is a unique looking sound absorbing and self-adhesive panel. Made of sliced BuzziFelt in the size and color-mix you prefer. You can pin all kinds of things to it.

It's functional and attractive in any office, home or hospitality environment.

Design by Sas Adriaenssens

---

## General

-  BrickBack Horizontal Stripes | Vertical Stripes  
Wall only  
Unicolor | Bicolor | Multicolor

-  Front Layer: Sliced BuzziFelt  
Back Layer: Self-adhesive BuzziSkin

No claims concerning deviation in color, size, and thickness can be accepted.

-  Because of the nature of the product this can variate. The risk is more likely in different batches.  
Treat the surface with water-based primer before applying BuzziBrickBack for optimal adhesion results.  
BuzziBrickBack can not be applied on vinyl or any other plasticized surface.

---

## Acoustics



Absorption



Diffusion



Mid tones



High tones

---

## Certifications



---

## Content

Configurations	3
Finishes	4
Dimensions	7

# Configurations


---

## BuzziBrickBack Horizontal stripes

🔑 BrickBack Horizontal stripes  
Unicolor | Bicolor | Multicolor

🌲 Front Layer: Sliced BuzziFelt  
Back Layer: Self-adhesive BuzziSkin

✂ Min. W 40 cm | 15.75"    H 40 cm | 15.75"  
✂ Max. W 120 cm | 47.24"    H 200 cm | 78.74"  
✂ Tolerance 0,6 cm | 0.24"  
✂ Thickness:  $\pm 1,4$  cm |  $\pm 0.55$ "

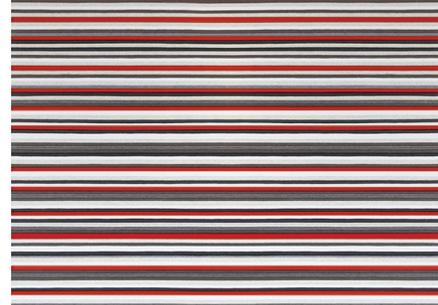


No claims concerning deviation in color, size, and thickness can be accepted.

Because of the nature of the product this can variate. The risk is more likely in different batches.

⚠ Treat the surface with water-based primer before applying BuzziBrickBack for optimal adhesion results.  
BuzziBrickBack can not be applied on vinyl or any other plasticized surface.

---

## BuzziBrickBack Vertical

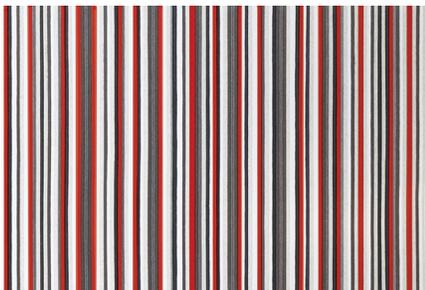

🔑 BrickBack Vertical stripes  
Unicolor | Bicolor | Multicolor

🌲 Front Layer: Sliced BuzziFelt  
Back Layer: Self-adhesive BuzziSkin

✂ Min. W 40 cm | 15.75"    H 40 cm | 15.75"  
✂ Max. W 120 cm | 47.24"    H 200 cm | 78.74"  
✂ Tolerance 0,6 cm | 0.24"  
✂ Thickness:  $\pm 1,4$  cm |  $\pm 0.55$ "

No claims concerning deviation in color, size, and thickness can be accepted.

Because of the nature of the product this can variate. The risk is more likely in different batches.

⚠ Treat the surface with water-based primer before applying BuzziBrickBack for optimal adhesion results.  
BuzziBrickBack can not be applied on vinyl or any other plasticized surface.

# Finishes

## General remark



The assembly of the sliced felt stripes results in a discontinuing line. When installing several panels next to each other the stripes will not be a continuous line. The product is developed as such that the patterns between different panels are never build up in the same order, meaning the order of the Felt slices are randomly placed during manufacturing . You will see the seam and the panels will not match up. This is for all versions. No claims concerning deviation in color, size, and thickness can be accepted. Because of the nature of the product this can variate. The risk is more likely in different batches.

**Composition** 100% Recycled PE.T. Felt, latex backing

**Weight** 1.000 g/m2 | 29.49 oz/yd2

**Abrasion resistance** >7.000 Martindale

**Flammability** EU: EN 13501.1 + A1/2009 Class B-s1,d0

USA: ASTM E84 Class A certified

**Fastness to light** USA 5



## Unicolor



Lime | Lime




Orange | Orange



Red | Red



EcoBrown | EcoBrown



LightBlue | LightBlue




StoneGrey | StoneGrey



Anthracite | Anthracite



OffWhite | OffWhite



Curry | Curry



Jeans | Jeans



Mokka | Mokka

---

## Bicolor



OffWhite | Lime



OffWhite | Orange



OffWhite | Red



OffWhite | EcoBrown




Offwhite | LightBlue



Offwhite | StoneGrey



OffWhite | Anthracite



OffWhite | Curry



OffWhite | Jeans



OffWhite | Mokka

---

# Multicolor



Grass

LightBlue  
OffWhite  
Lime



Savannah

LightBlue  
EcoBrown  
Orange




Toendra

LightBlue  
StoneGrey  
Lime



Zebra

Anthracite  
StoneGrey  
OffWhite



Jane



Anthracite  
StoneGrey  
EcoBrown  
OffWhite  
White  
Red




Sigma

Anthracite  
StoneGrey  
EcoBrown  
OffWhite  
White  
Orange

# Dimensions

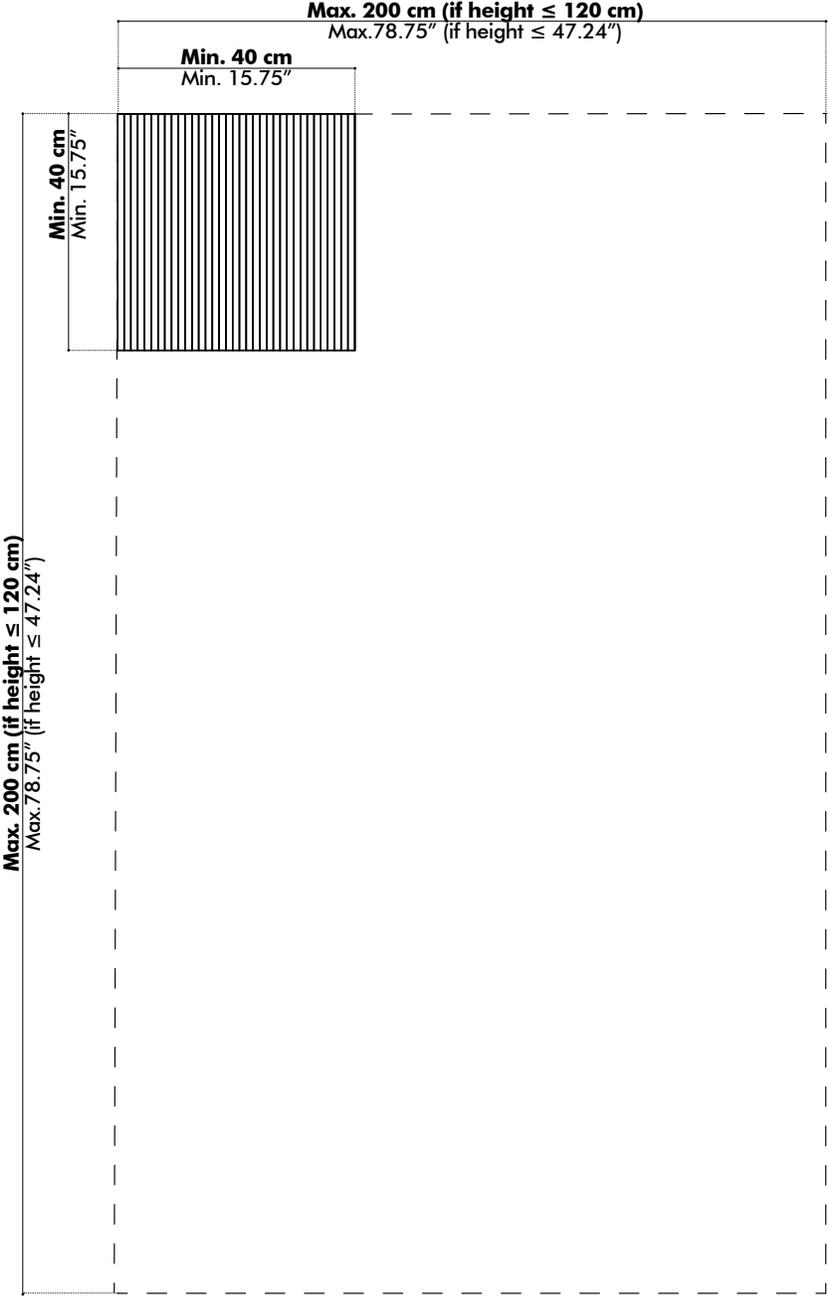

Front View




Side View

# Acoustics

## BuzziBrickBack

### Absorption coefficient

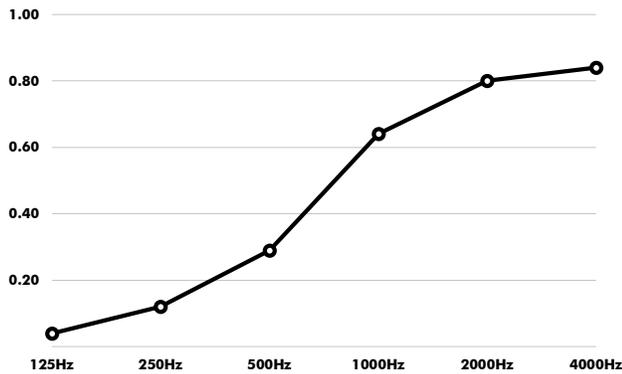

Hz	$\alpha^s$
125	0.04
250	0.12
500	0.29
1000	0.64
2000	0.80
4000	0.84

### Absorption Values

$\alpha_w$   
(ISO 11654) **0.35**

NRC  
(ASTM - C423) **0.50**

SAA  
(ASTM-C423) **0.46**

## Glossary

All calculations are based on accredited lab measurements, official document available on Buzzi.Space

### Definitions

<b><math>\alpha</math></b>	Weighted absorption coefficient	(ISO 11654)
<b>NRC</b>	Noise reduction coefficient	(ASTM - C423)
<b>SAA</b>	Sound absorption average	(ASTM - C423)

### Classification of sound absorbers NEN-EN-ISO 11654

- A** 0.90 | 0.95 | 1.0
- B** 0.80 | 0.85
- C** 0.60 | 0.65 | 0.70 | 0.75
- D** 0.03 | 0.55
- E** 0.15 | 0.25